

	BOX SCATOLA			PALLET		
	PCS PZ	SQ.MT. MQ	KG	BOXES SCATOLE	SQ.MT. MQ	KG
120x120 - 48"x48" matt White Beige Oyster Smoke	2	2,88	60,90	18	51,84	1117
60x120 - 24"x48" matt carved	2	1,44	30,00	35	50,40	1070
90x90 - 36"x36" ultra matt Smoke Beige Oyster TH/CK _{10mm}	1	0,81	36,50	30	24,30	1115
90x90 - 36"x36" matt	2	1,62	35,00	20	32,40	720
60x60 - 24"x24" matt carved	3	1,08	23,75	40	43,20	970
30x60 - 12"x24" matt carved	6	1,08	23,55	40	43,20	962
30x30 - 12"x12" matt	11	1,00	21,80	48	48,00	1066
20x60 - 8"x24" matt	8	0,96	20,95	48	46,08	1026
15x15 - 7"x7" matt	44	1,00	21,80	48	48,00	1066
10x60 - 4"x24" matt	15	0,90	19,65	40	36,00	806
10x10 - 4"x4" matt	50	0,50	10,90	50	25,00	565
TERRAZZO 60x60 - 24"x24" matt	3	1,08	23,75	40	43,20	970
TERRAZZO 30x30 - 12"x12" matt	11	1,00	21,80	48	48,00	1066
TERRAZZO mosaic 30x30 (5x5) 12"x12" (2"x2") matt	11	1,00	21,50	30	30,00	665
CURVY 10x30 - 4"x12" matt	12	0,36	9,00	60	21,60	560
mosaic 30x30 (5x5) 12"x12" (2"x2") matt carved	11	1,00	21,50	30	30,00	665
mosaic 30x60 - 12"x24" matt	6	1,08	23,25	30	32,40	718
skirting battiscopa 5x60 - 2"x24" matt	12	7,20ml	8,00	-	-	-
skirting battiscopa 5x90 - 2"x36" matt	12	10,80ml	12,00	-	-	-
step 30x60 - 12"x24" matt	6	-	26	-	-	-
step tread 34x90 - 14"x36" matt	2	-	17,50	-	-	-

	PCS/CRATE	SQ.MT. SLAB	KG/SLAB	SQ.MT. CRATE	KG/CRATE
120x280 - 48"x112" matt <i>Light</i> _{10mm} White Beige Oyster Smoke	20	3,36	57,50	67,20	1210
	PCS/A-FRAME	SQ.MT. SLAB	KG/SLAB	SQ.MT. A-FRAME	KG/A-FRAME zinc plate
	44	3,36	57,50	147,84	2630

valid for **LAGOM** matt | carved | ultra matt

TECHNICAL FEATURES UNGLAZED PORCELAIN STONEWARE

CONFORMING TO EUROPEAN STANDARDS EN 14411 ISO 13006 APP. G (GROUP BIA UGL WITH EB ≤ 0,5%)

 sizes EN ISO 10545-2 compliant	 water absorption EN ISO 10545-3 compliant	 thermal expansion coefficient EN ISO 10545-8 ≤9 MK-1	 frost resistance EN ISO 10545-12 resistant	 thermal shock resistance EN ISO 10545-9 resistant	 abrasion resistance EN ISO 10545-6 compliant
 modulus of rupture EN ISO 10545-4 compliant	 breaking strength EN ISO 10545-4 compliant thickn. < 7,5 mm MIN 700N thickn. ≥ 7,5 mm MIN 1300N Thick 20mm ≥ 4000N	 chemical resistance EN ISO 10545-13 from ULA to ULB from UHA to UHB UA	 stains resistance EN ISO 10545-14 class 5	 colours resistance to light DIN 51094 no alteration after testing	 friction coefficient (slipperiness) DIN 51130 ANSI A 137.1 (DCOF) R10 matt R11 carved > 0,42 R11 Thick 20mm

valid for **LAGOM CURVY** matt

TECHNICAL SPECIFICATIONS FOR EXTRUDED CERAMIC TILES

CONFORMING TO EN 14411 ISO 13006 STANDARDS ANNEX F (GROUP AIII GL WITH EB > 10%)

 water absorption EN ISO 10545-3 Eb > 10%	 breaking strength UNI EN ISO 10545-4 compliant	 glaze crazing resistance UNI EN ISO 10545-11 resistant	 chemical resistance UNI EN ISO 10545-14 UNI EN ISO 10545-13 Min. class 3 Min. class B	 V2 MODERATE
---	---	---	--	--

The tone of the samples is purely indicative and may vary between production runs.
Il tono presentato nelle campionature è puramente indicativo e può variare da produzione a produzione.

TERRATINTA
group

A company part of

ITALCER
GROUP
DESIGN SURFACES

Certified
Corporation


view the
LAGOM
collection


DOWNLOAD
A R E A

terratinta
ceramiche

#notaclassicstory

brand of Terratinta Group Srl SB

// 45, via Viazza II Tronco 41042
Fiorano Modenese (MO) Italy
T +39 0536911408
W terratintagroup.com
Terratinta Group
terratintagroup //

#terratintastyle

100%
made in
Italy
terratinta
ceramiche

LAGOM


LAGOM
THE ESSENCE OF STONE



terratinta
ceramiche

100%
made in
Italy



White

matt



carved




Smoke

matt



carved

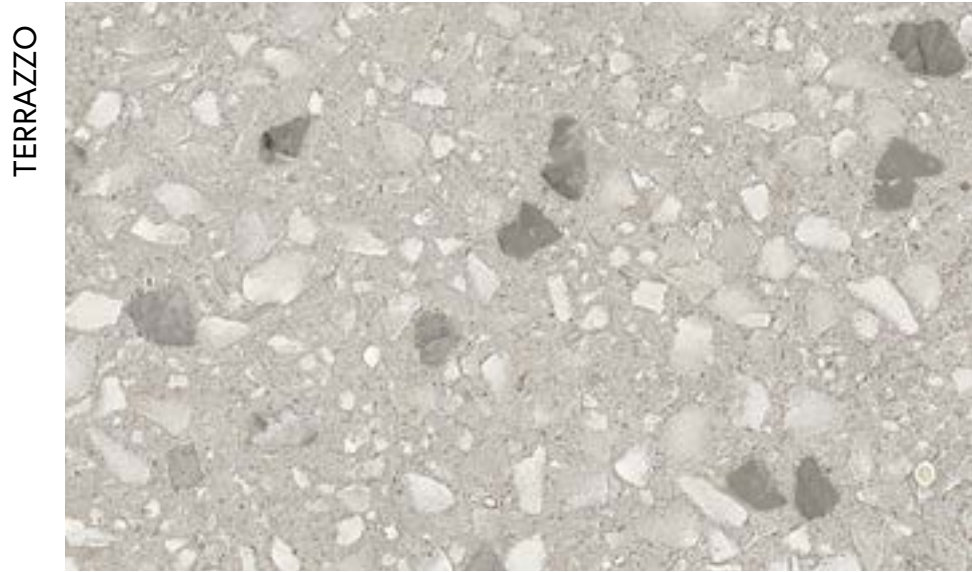

Terrazzo Sun

matt




Beige

matt




carved

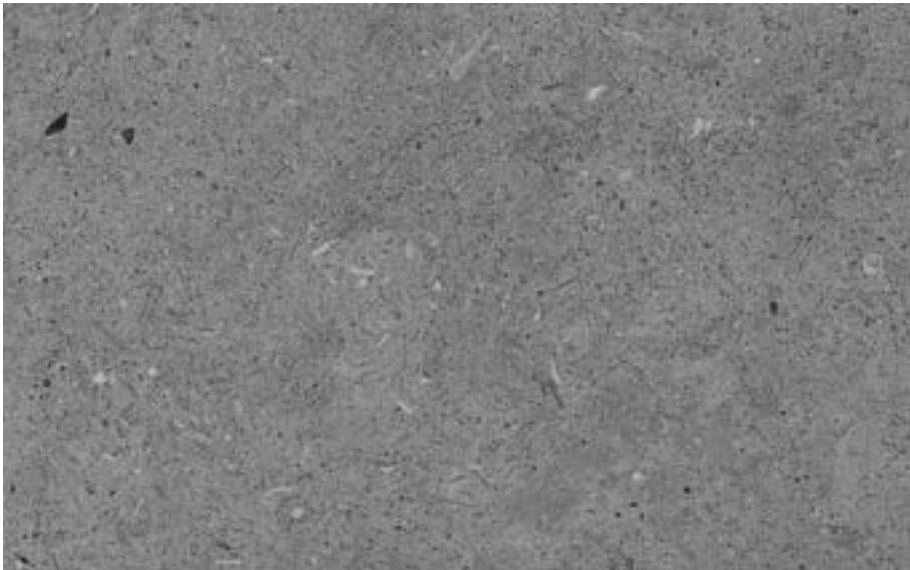

Graphite

matt

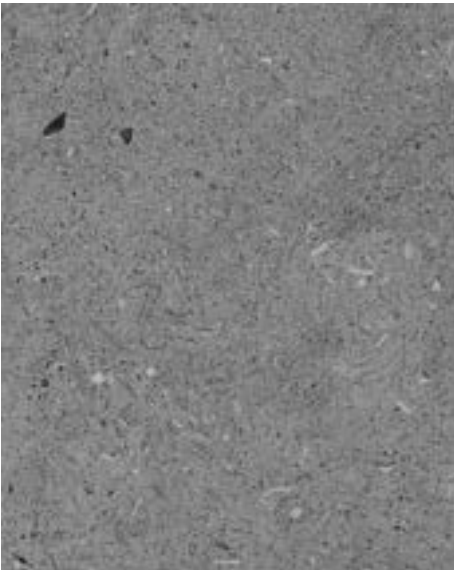

carved



Terrazzo Cloud

matt




Oyster

matt




carved

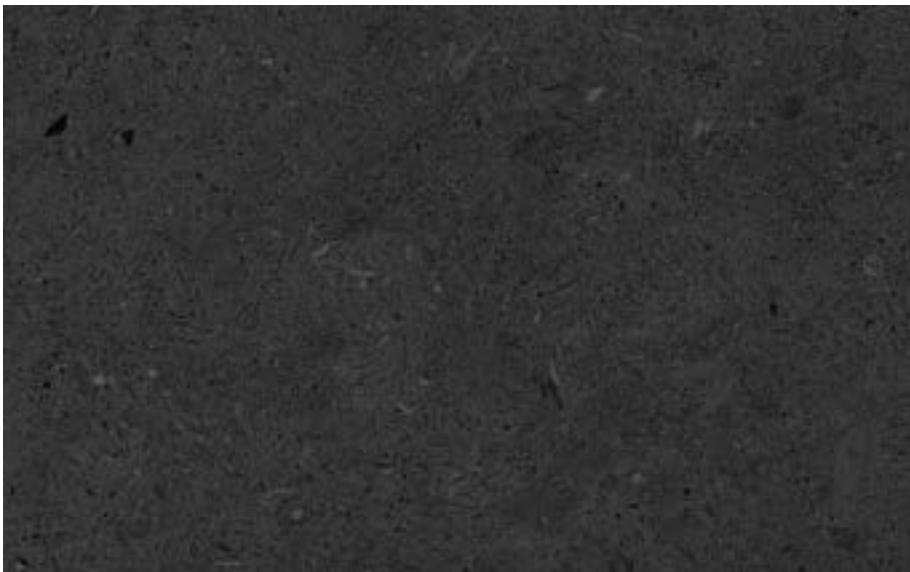

Charcoal

matt

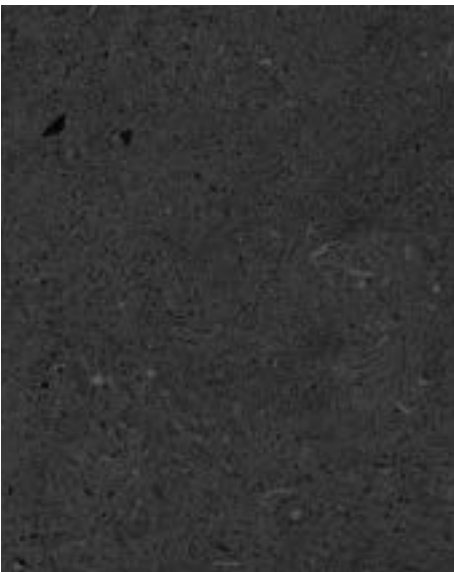

carved



Terrazzo Storm

matt

TERRAZZO