

valid for VICENTINA XXS matt					
TECHNICAL FEATURES UNGLAZED PORCELAIN STONEWARE CONFORMING TO EUROPEAN STANDARDS EN 14411 ISO 13006 APP. G (Group BIA UGL Eb ≤ 0,5%)					
					
sizes	water absorption	thermal expansion coefficient	frost resistance	thermal shock resistance	abrasion resistance
EN ISO 10545-2	EN ISO 10545-3	EN ISO 10545-8	EN ISO 10545-12	EN ISO 10545-9	EN ISO 10545-6
compliant	compliant	≤9 MK-1	resistant	resistant	compliant
					
modulus of rupture	breaking strength	chemical resistance	stains resistance	colours resistance to light	friction coefficient (slipperiness)
EN ISO 10545-4	EN ISO 10545-4	EN ISO 10545-13	EN ISO 10545-14	DIN 51094	DIN EN 16165 ANSI A 137.1 (DCOF)
compliant	compliant sp. < 7,5 mm MIN 700N sp. ≥ 7,5 mm MIN 1300N Thick 20mm ≥ 4000N	from ULA to ULB from UHA to UHB UA	class 5	no alteration after testing	R10 matt R11 ultra matt >0,42 Thick 20mm R11

valid for VICENTINA XXS glossy					
TECHNICAL FEATURES GLAZED PORCELAIN STONEWARE CONFORMING TO EUROPEAN STANDARDS EN 14411 ISO 13006 APP. G (Group BIA GL Eb ≤ 0,5%)					
					
sizes	water absorption	thermal expansion coefficient	frost resistance	thermal shock resistance	abrasion resistance
EN ISO 10545-2	EN ISO 10545-3	EN ISO 10545-8	EN ISO 10545-12	EN ISO 10545-9	EN ISO 10545-7
compliant	compliant	≤9 MK-1	resistant	resistant	compliant
					
		chemical resistance	stains resistance	glaze crazing resistance	
		EN ISO 10545-13	EN ISO 10545-14	EN ISO 10545-11	
		from GLA to GLB from GHA to GHB GA	class 5 min.	resistant	

valid for VICENTINA matt ultra matt					
TECHNICAL FEATURES UNGLAZED PORCELAIN STONEWARE CONFORMING TO EUROPEAN STANDARDS EN 14411 ISO 13006 APP. G (Group BIA UGL Eb ≤ 0,5%)					
					
sizes	water absorption	thermal expansion coefficient	frost resistance	thermal shock resistance	abrasion resistance
EN ISO 10545-2	EN ISO 10545-3	EN ISO 10545-8	EN ISO 10545-12	EN ISO 10545-9	EN ISO 10545-6
compliant	compliant	≤9 MK-1	resistant	resistant	compliant
					
modulus of rupture	breaking strength	chemical resistance	stains resistance	colours resistance to light	friction coefficient (slipperiness)
EN ISO 10545-4	EN ISO 10545-4	EN ISO 10545-13	EN ISO 10545-14	DIN 51094	DIN EN 16165 ANSI A 137.1 (DCOF)
compliant	compliant sp. < 7,5 mm MIN 700N sp. ≥ 7,5 mm MIN 1300N Thick 20mm ≥ 4000N	from ULA to ULB from UHA to UHB UA	class 5	no alteration after testing	R10 matt R11 ultra matt >0,42 Thick 20mm R11

The tone of the samples is purely indicative and may vary between production runs.
Il tono presentato nelle campionature è puramente indicativo e può variare da produzione a produzione.



brand of Terratinta Group Srl SB


// 45, via Viazza II Tronco
41042 Fiorano Modenese (MO)
Italy T +39 0536911408
W terratintagroup.com
Terratinta Group
terrattintagroup //
#terrattintastyle



DOWNLOAD
AREA



Vicentina

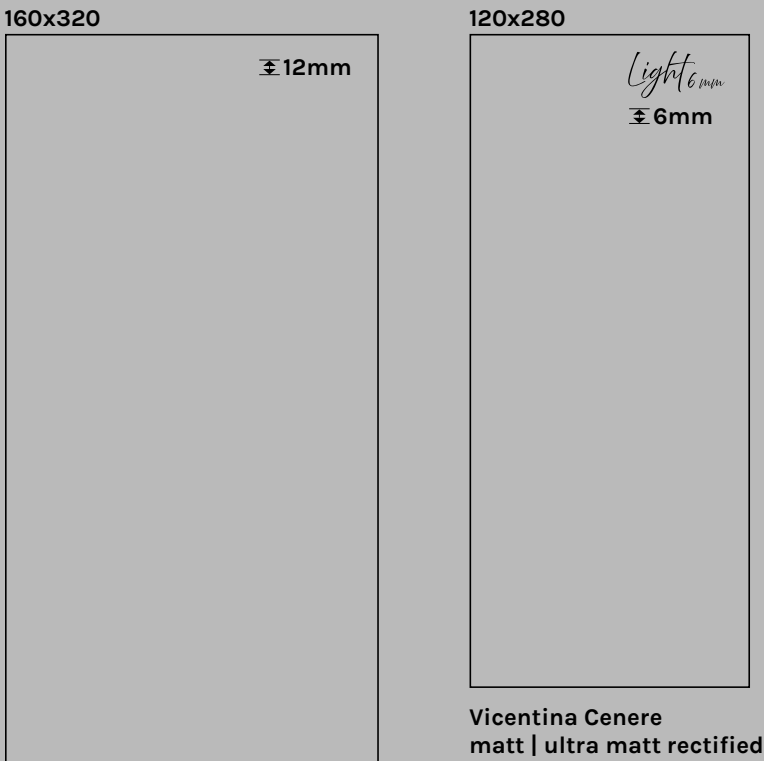

Vicentina Cerene matt unrectified

± 9mm
rectified

60x120



matt | *ultra matt
(Thick20mm)

60x60



matt | ultra matt
30x60



matt | ultra matt

30x30



matt

15x15



matt

PORCELAIN STONEWARE
GRES PORCELLANATO
rectified and modular
rettificati e modulari

mosaics:
mosaici:



30x30 (5x5) matt

MOSAICS - MOSAICI | MIX

Mosaics mix: Vicentina Cerene
matt and Marmo Apuano* honed

Mosaici mix: Vicentina Cerene matt e
Marmo Apuano* honed

* Marmo Apuano: Ceramica Magica

Cross Light - Cross Dark
29x29



Strips
29x29



Dome Shade
Dome Mild
29,6x39,6



Ellipse
31,8x39



Vicentina XXS

22x22



matt

11x22



matt

11x11




matt

11x11



glossy

Vicentina
matt ± 9 mm

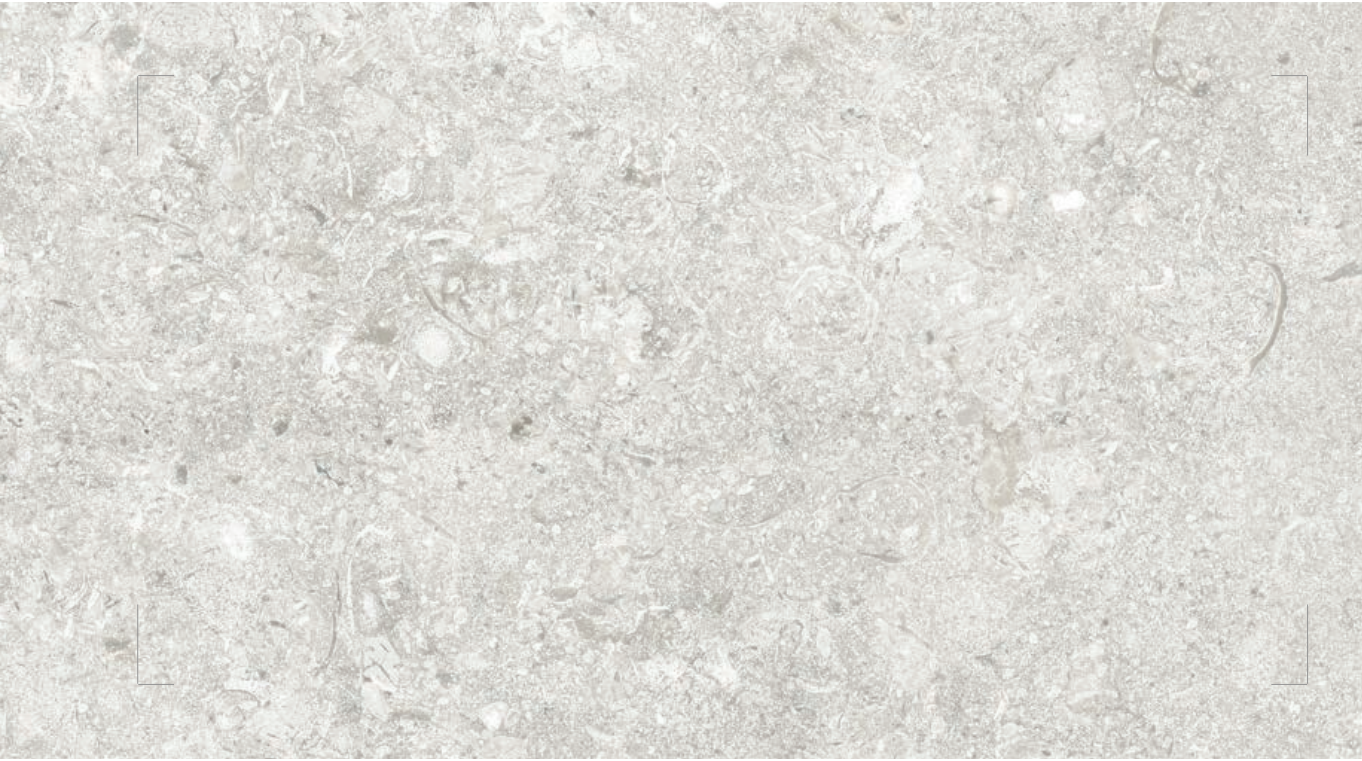

Bianco matt



Avorio matt



Tortora matt



Cenere matt


Vicentina XXS
matt ± 9 mm




Bianco matt



Avorio matt

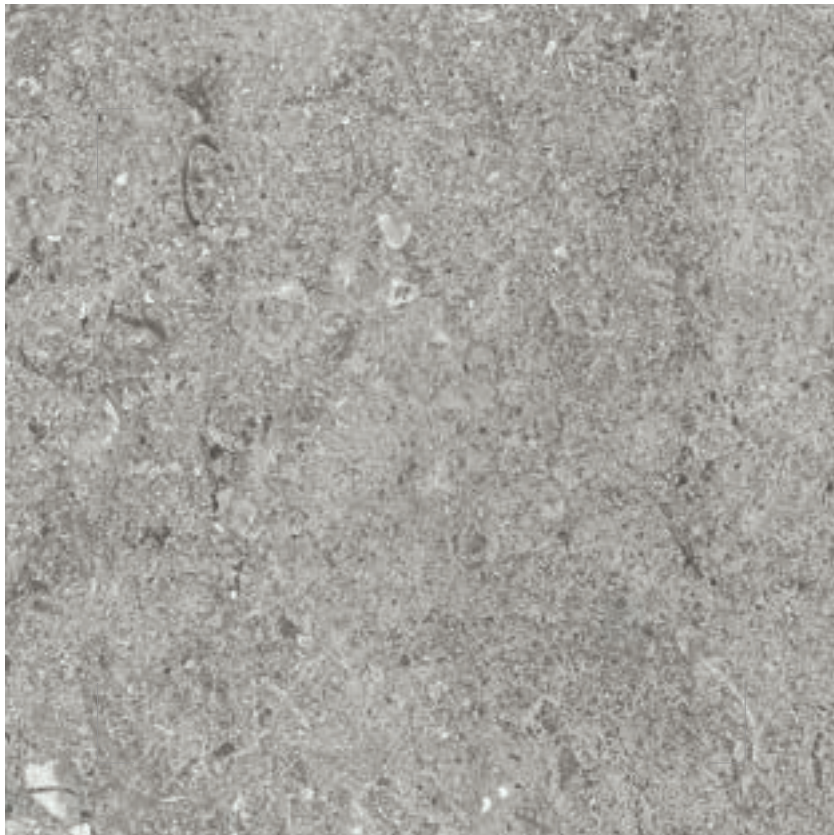

Tortora matt

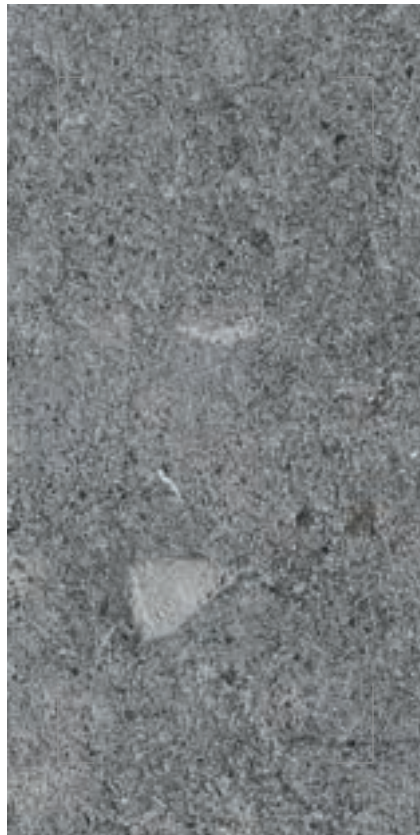


Cenere matt


Vicentina XXS
glossy ± 9 mm



Salvia glossy

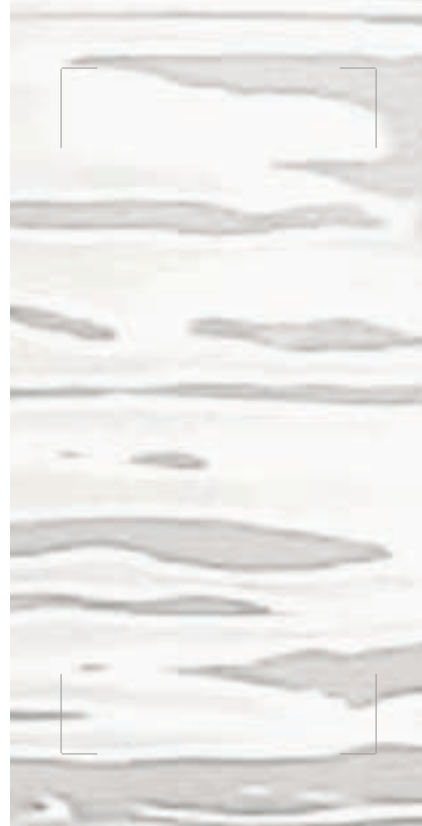

Panna glossy

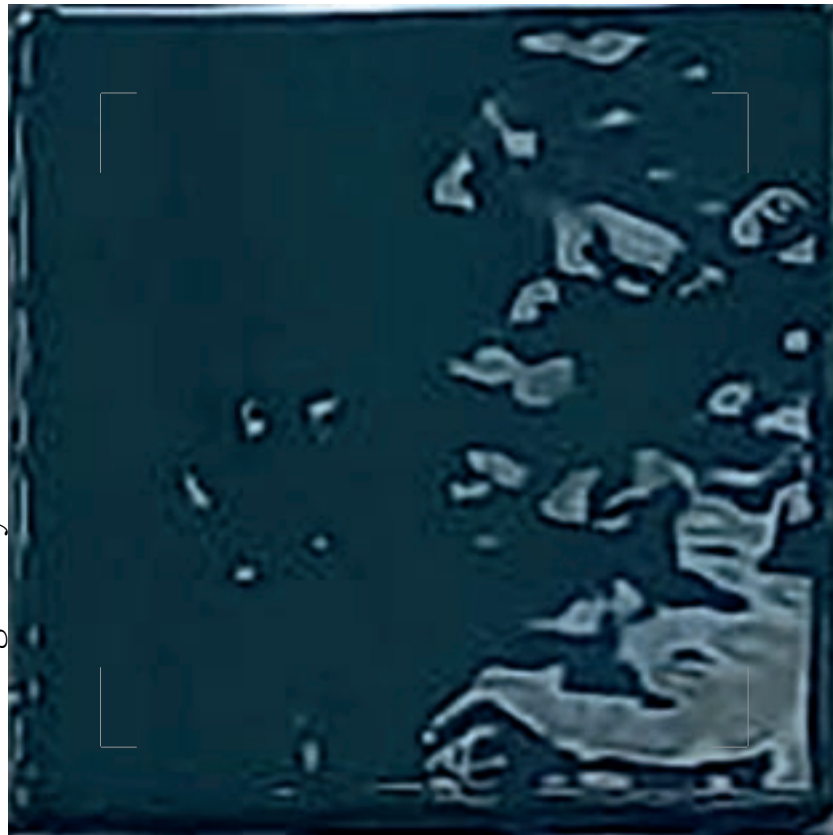

Ottanio glossy



Cotto glossy