


KRILL ADJUSTABLE L



TECHNICAL DIMENSION

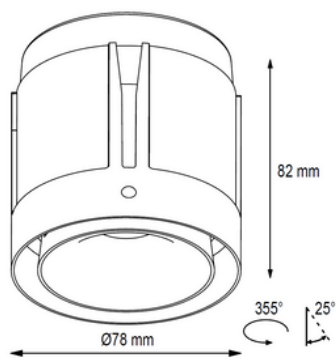

LIGHTING INFORMATION

Location	Indoor
Mounting Type	Ceiling Recessed
Housing	Die-Cast Aluminium
Ingress Protection	IP43
Adjustability	YES
Ratate Angle	355°
Tilt Angle	25°
Fixture Dimension (mm)	78 mm x 82 mm
Finish	White / Black
Reflector Finish	Custom Finish

Wattage	10.5 W
Forward Current	250 mA
Luminous Flux	900 lm
Luminaire Efficacy	85 lm/w
Appliance Class	Class III
Lumen Maintenance (L80/B50)	50,000 hrs
LED Driver	Remote
Control	On/Off, 1-10V, DALI, Phase-Cut Dimmable

Optic	Reflector
Beam Angle	24° / 45° / 60°
CCT	2700K, 3000K, 4000K, 6000K
CRI	> 80 / 90 / 97
UGR	< 19
Chromaticity Tolerance	2 SDCM