


# KRILL PINHOLE M



## TECHNICAL DIMENSION

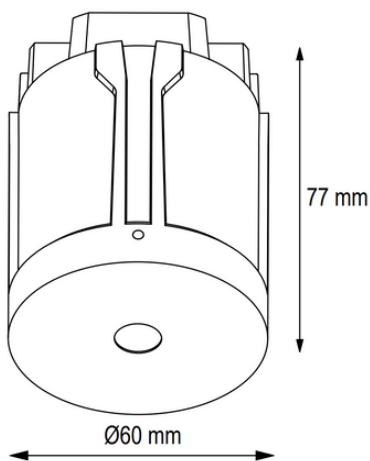

## LIGHTING INFORMATION

|                        |                    |
|------------------------|--------------------|
| Location               | Indoor             |
| Mounting Type          | Ceiling Recessed   |
| Housing                | Die-Cast Aluminium |
| Ingress Protection     | IP43               |
| Adjustability          | NO                 |
| Ratate Angle           | NA                 |
| Tilt Angle             | NA                 |
| Fixture Dimension (mm) | 60 mm x 77 mm      |
| Finish                 | White / Black      |
| Reflector Finish       | Custom Finish      |

|                             |                                         |
|-----------------------------|-----------------------------------------|
| Wattage                     | 10.5 W                                  |
| Forward Current             | 250 mA                                  |
| Luminous Flux               | 685 lm                                  |
| Luminaire Efficacy          | 65 lm/w                                 |
| Appliance Class             | Class III                               |
| Lumen Maintenance (L80/B50) | 50,000 hrs                              |
| LED Driver                  | Remote                                  |
| Control                     | On/Off, 1-10V, DALI, Phase-Cut Dimmable |

|                        |                            |
|------------------------|----------------------------|
| Optic                  | Reflector                  |
| Beam Angle             | 24° / 36°                  |
| CCT                    | 2700K, 3000K, 4000K, 6500K |
| CRI                    | > 80 / 90 / 97             |
| UGR                    | < 19                       |
| Chromaticity Tolerance | 2 SDCM                     |