


# ATOM L



## TECHNICAL DIMENSION

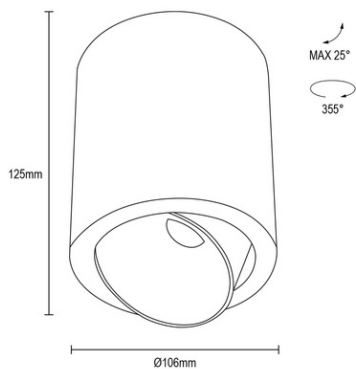

## LIGHTING INFORMATION

|                        |                    |
|------------------------|--------------------|
| Location               | Indoor             |
| Mounting Type          | Ceiling Surface    |
| Housing                | Die-Cast Aluminium |
| Ingress Protection     | IP20               |
| Adjustability          | YES                |
| Ratate Angle           | 355°               |
| Tilt Angle             | 25°                |
| Fixture Dimension (mm) | 106 mm x 125 mm    |
| Finish                 | White / Black      |
| Reflector Finish       | Custom Finish      |

|                             |                                         |
|-----------------------------|-----------------------------------------|
| Wattage                     | 14 W                                    |
| Forward Current             | 350 mA                                  |
| Luminous Flux               | 1200 lm                                 |
| Luminaire Efficacy          | 85 lm/w                                 |
| Appliance Class             | Class I                                 |
| Lumen Maintenance (L80/B50) | 50,000 hrs                              |
| LED Driver                  | Remote                                  |
| Control                     | On/Off, 1-10V, DALI, Phase-Cut Dimmable |

|                        |                     |
|------------------------|---------------------|
| Optic                  | Reflector           |
| Beam Angle             | 40°                 |
| CCT                    | 2700K, 3000K, 4000K |
| CRI                    | >90                 |
| UGR                    | < 19                |
| Chromaticity Tolerance | 3 SDCM              |