


ORBIX L



TECHNICAL DIMENSION

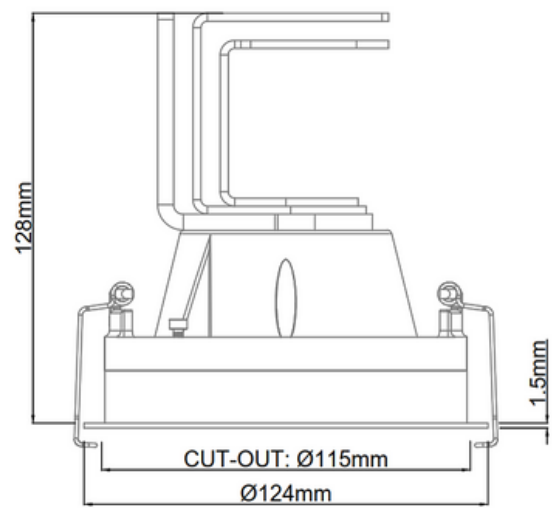

LIGHTING INFORMATION

Location	Indoor
Mounting Type	Ceiling Recessed
Housing	Die-Cast Aluminium
Ingress Protection	IP43
Adjustability	Yes
Rotate Angle	365°
Tilt Angle	45°
Fixture Dimension (mm)	124 mm x 128 mm
Finish	White / Black
Reflector Finish	Custom Finish

Wattage	20 W
Forward Current	500 mA
Luminous Flux	1900 lm
Luminaire Efficacy	95 lm/w
Appliance Class	Class III
Lumen Maintenance (L80/B50)	50,000 hrs
LED Driver	Remote
Control	On/Off, 1-10V, DALI, Phase-Cut Dimmable

Optic	Reflector
Beam Angle	22° / 36° / 45°
CCT	2700K, 3000K, 4000K, 5700K
CRI	> 80, 90, 97
UGR	< 19
Chromaticity Tolerance	2 SDCM