


# VOX M



## TECHNICAL DIMENSION

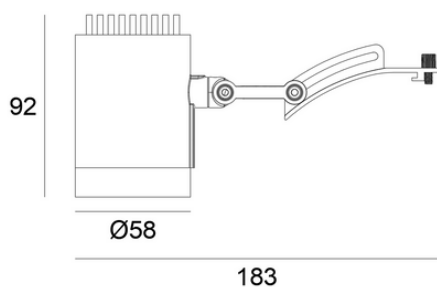

## LIGHTING INFORMATION

|                        |                    |
|------------------------|--------------------|
| Location               | Indoor             |
| Mounting Type          | Track Mounted      |
| Housing                | Extruded Aluminium |
| Ingress Protection     | IP20               |
| Adjustability          | YES                |
| Rotate Angle           | 270°               |
| Tilt Angle             | 300° + 180°        |
| Fixture Dimension (mm) | 58 mm x 92 mm      |
| Finish                 | White / Black      |
| Reflector Finish       | Custom Finish      |

|                             |                                         |
|-----------------------------|-----------------------------------------|
| LED Voltage                 | 220 - 240 V                             |
| Wattage                     | 15 W                                    |
| Luminous Flux               | 1575 lm                                 |
| Luminaire Efficacy          | 105 lm/w                                |
| Appliance Class             | Class III                               |
| Lumen Maintenance (L80/B10) | 50,000 hrs                              |
| LED Driver                  | Remote                                  |
| Control                     | On/Off, 1-10V, DALI, Phase-Cut Dimmable |
| Optic                       | Reflector                               |
| Beam Angle                  | 15° / 26° / 36° / 50°                   |
| CCT                         | 2700K / 3000K / 4000K                   |
| CRI                         | > 90                                    |
| UGR                         | < 19                                    |
| Chromaticity Tolerance      | 3 SDCM                                  |