


# MINUS ADJUSTABLE S



## LIGHTING INFORMATION

|                        |                    |
|------------------------|--------------------|
| Location               | Indoor             |
| Mounting Type          | Ceiling Recessed   |
| Housing                | Die-Cast Aluminium |
| Ingress Protection     | IP44               |
| Adjustability          | Yes                |
| Rotate Angle           | 355°               |
| Tilt Angle             | 30°                |
| Fixture Dimension (mm) | 46 mm x 71 mm      |
| Finish                 | White / Black      |
| Reflector Finish       | Custom Finish      |

## TECHNICAL DIMENSION

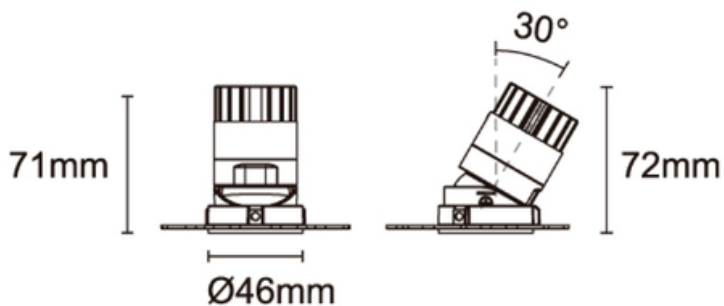

|                             |                                         |
|-----------------------------|-----------------------------------------|
| Wattage                     | 7 W                                     |
| Forward Current             | 350 mA                                  |
| Luminous Flux               | 547 lm                                  |
| Luminaire Efficacy          | 78 lm/w                                 |
| Appliance Class             | Class II                                |
| Lumen Maintenance (L80/B50) | 50,000 hrs                              |
| LED Driver                  | Remote                                  |
| Control                     | On/Off, 1-10V, DALI, Phase-Cut Dimmable |

|                        |                            |
|------------------------|----------------------------|
| Optic                  | Reflector                  |
| Beam Angle             | 20° / 25° / 35° / 40°      |
| CCT                    | 2700K, 3000K, 4000K, 5000K |
| CRI                    | > 90+                      |
| UGR                    | < 19                       |
| Chromaticity Tolerance | 2 SDCM                     |

HALO