


MINUS ADJUSTABLE S



TECHNICAL DIMENSION

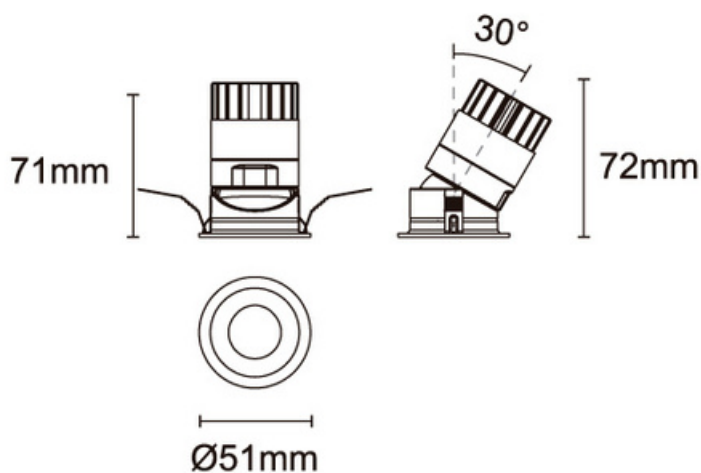

HALO

LIGHTING INFORMATION

Location	Indoor
Mounting Type	Ceiling Recessed
Housing	Die-Cast Aluminium
Ingress Protection	IP44
Adjustability	Yes
Ratate Angle	355°
Tilt Angle	30°
Fixture Dimension (mm)	51 mm x 71 mm
Finish	White / Black
Reflector Finish	Custom Finish

Wattage	7 W
Forward Current	350 mA
Luminous Flux	525 lm
Luminaire Efficacy	75 lm/w
Appliance Class	Class II
Lumen Maintenance (L80/B50)	50,000 hrs
LED Driver	Remote
Control	On/Off, 1-10V, DALI, Phase-Cut Dimmable

Optic	Reflector
Beam Angle	20° / 25° / 35° / 40°
CCT	2700K, 3000K, 4000K, 5000K
CRI	> 90+
UGR	< 19
Chromaticity Tolerance	2 SDCM