



# VOID ADJUSTABLE M



## TECHNICAL DIMENSION

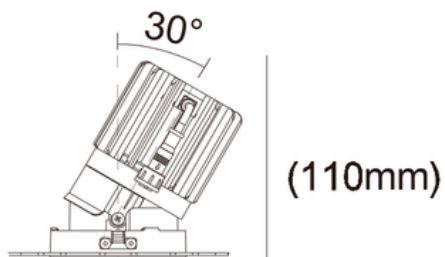

Ø75mm



Ø121mm

## LIGHTING INFORMATION

Location	Indoor
Mounting Type	Ceiling Recessed
Housing	Die-Cast Aluminium
Ingress Protection	IP44
Adjustability	Yes
Rotate Angle	355°
Tilt Angle	30°
Fixture Dimension (mm)	75 mm x 110 mm
Finish	White / Black
Reflector Finish	Custom Finish
Wattage	15 W
Forward Current	350 mA
Luminous Flux	809 lm
Luminaire Efficacy	54 lm/w
Appliance Class	Class II
Lumen Maintenance (L80/B50)	50,000 hrs
LED Driver	Remote
Control	On/Off, 1-10V, DALI, Phase-Cut Dimmable
Optic	Reflector
Beam Angle	25° / 30° / 36° / 50°
CCT	2700K, 3000K, 4000K, 5000K
CRI	> 90+
UGR	< 19
Chromaticity Tolerance	2 SDCM

HALO