


VOID ADJUSTABLE L



TECHNICAL DIMENSION

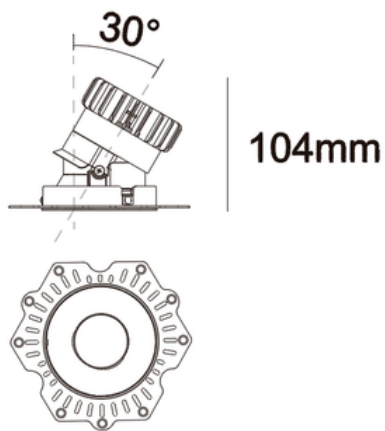

Ø90mm

149mm

● Cut out : 100mm

HALO

LIGHTING INFORMATION

Location	Indoor
Mounting Type	Ceiling Recessed
Housing	Die-Cast Aluminium
Ingress Protection	IP44
Adjustability	Yes
Rotate Angle	355°
Tilt Angle	30°
Fixture Dimension (mm)	90 mm x 104 mm
Finish	White / Black
Reflector Finish	Custom Finish
Wattage	17 W
Forward Current	500 mA
Luminous Flux	2004 lm
Luminaire Efficacy	117 lm/w
Appliance Class	Class III
Lumen Maintenance (L80/B50)	50,000 hrs
LED Driver	Remote
Control	On/Off, 1-10V, DALI, Phase-Cut Dimmable
Optic	Reflector
Beam Angle	20° / 30° / 45° / 55°
CCT	2700K, 3000K, 4000K, 5000K
CRI	> 90+
UGR	< 19
Chromaticity Tolerance	2 SDCM