


Fuse Accessories

EXPENDABLE CAPS FOR SOUTHERN STATES EXPULSION FUSES

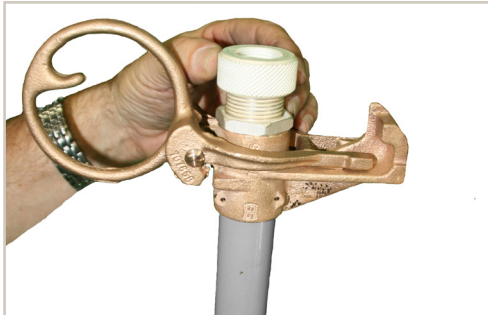

Expendable Caps for Type BP Power Fuses

<i>Catalog No. For 100 Amp Cutouts</i>	<i>Catalog No. For 200 Amp Cutouts</i>
BP-100 (Part # 58010101) Qty: 5 each	BP-200 (Part # 58010102) Qty: 5 each

*Contact factory for BPA or HPA spare expendable caps

FUSE JUMPERS AND HOOKS FOR SSLC FUSES

Southern States Type JDM or JDM-45 fuse jumpers allow inspection or replacement of elements of any power fuse without service interruption.

Fuses in service may be modified to permit its use by installing terminal hooks between fuse mounting hardware and insulator caps at jaw and hinge ends. These hooks are designed to engage with terminal rings located at each end of the Type JDM spring loaded jumper. The Type JDM fuse jumper may be easily installed with any hookstick.


With fuse by-passed, fuse holder and link may be removed for inspection.

The JDM is not intended to be left in the circuit for a period longer than is necessary to change fuse holders or examine fuse links. It does not function as a fuse and has no interrupting rating.

The table to the right is a tabulation showing the continuous current it will safely carry for a given period of time:

Time (hr)	Amperes
1/6	200
1	125
2	100
Continuous	75

TERMINAL HOOKS

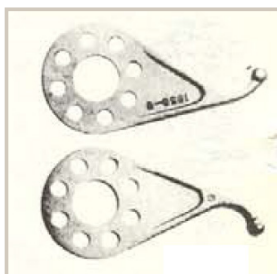

Description	Catalog Number
3" B.C.	JDMH3 (48050303)
5" B.C.	JDMH5 (48050305)

Note: Part number is for set of *two* per fuse

CATALOG BULLETIN**CATALOG & PART NUMBERS**Catalog #: **JDM** - (*Fuse Mounting*) - (*Fuse kV*) - **STD**

Fuse kV	Amp	Hook Spacing	Fuse Mounting	Catalog #	Part #
7.2 - 23	200	Variable	Vertical (V)	JDM-V-72-23-STD	48050625
			45° Underhung (45)	N/A	
			Underhung (I)		
34.5	200	24"	Vertical (V)	JDM-V-34-STD	48050626
			45° Underhung (45)	JDM-45-34-STD	48051626
			Underhung (I)	JDM-I-34-STD	48051526
46	200	30"	Vertical (V)	JDM-V-46-STD	48050627
			45° Underhung (45)	JDM-45-46-STD	48051627
			Underhung (I)	JDM-I-46-STD	48051527
69	200	36" & 39"	Vertical (V)	JDM-V-69-STD	48050628
			45° Underhung (45)	JDM-45-69-STD	48051628
			Underhung (I)	JDM-I-69-STD	48051528
115	200	59"	Vertical (V)	JDM-V-115-STD	48050629
			45° Underhung (45)	JDM-45-115-STD	48051629
			Underhung (I)	JDM-I-115-STD	48051529
138	200	65"	Vertical (V)	JDM-V-138-STD	48050630
			45° Underhung (45)	JDM-45-138-STD	48051630
			Underhung (I)	JDM-I-138-STD	48051531
161	200	67"	Vertical (V)	JDM-V-161-STD	48050631
			45° Underhung (45)	JDM-45-161-STD	48051631
			Underhung (I)	JDM-I-161-STD	48051531



Type JDM For Fuses
Rated 7.2 - 23 kV



Type JDM For Fuses
Rated 34.5 - 161 kV



Type JDM-45 for 45°
Underhung Fuses

The equipment described in this bulletin performs in accordance with NEMA standards publication SG2-1954, paragraphs SG2-5, SG2-5.10, and SG2-5.11.