




單(複)動後拉螺栓缸


Hydraulic Single(Double) Action Compact Pull Cylinder(Threaded Body)

單位:(mm)

型號		SYDR22M型	SYDR30M型	SYDR45M型	SYDR55M型
行程	mm	6	10	12	12
輸出力量計算	kg	$F=(0.70 \times P)-6$	$F=(1.51 \times P)-11$	$F=(5.39 \times P)-32$	$F=(9.58 \times P)-48$
油缸截面積	cm ²	0.98	2.01	6.03	10.71
油缸容量	cm ³	0.59	2.01	7.24	12.86
使用壓力範圍	Kgf/cm ²	10~250			
使用溫度範圍	C°	0~70			
A	mm	M22x1.5	M30x1.5	M45x1.5	M55x2.0
B	mm	20.3	28.3	43.3	52.6
C	mm	9.5	11.5	15.5	19.5
D	mm	10	12	16	20
E	mm	19	26.5	40	50
F	mm	53.5	71.5	83	91
G	mm	26.5	36.5	40	41
H	mm	8	9	12	12
J	mm	8	10	12	16
K	mm	11	16	19	22
L	mm	4.5	5.5	6.5	8.5
M	mm	M6x11	M8x18	M10x20	M12x22
N	mm	8	10	14	17
P	mm	17	24	36	46
S(半徑)	mm	6.3	7.5	12.5	13.5
T	mm	20.5	28.5	43.5	53
U	min	mm	14	15	18
	max	mm	34	45	52
V	mm	2	2.5	3	3
W	mm	2	2.5	3	3
X	mm	C1	C1	C1	C1.5
供油口O型環	mm	P3	P3	P7	P7
排氣或入油口O型環	mm	P14	P21	P29	P35
質量	kg	0.08	0.2	0.6	0.9
備註					

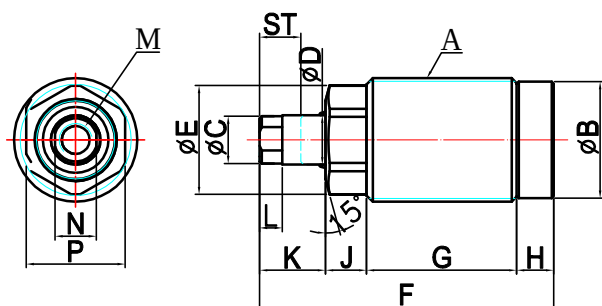

外型尺寸

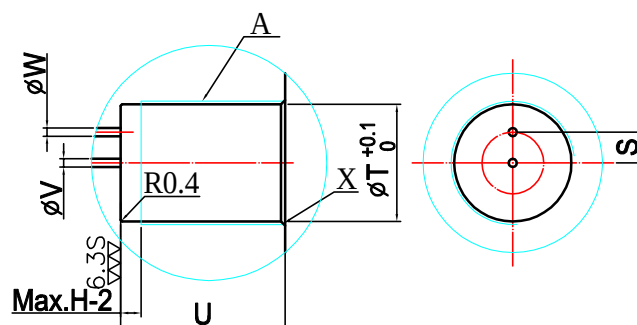

安裝部位加工尺寸






技術數據尺寸

Technical data Dimensions


單位:(kg)

型號	油缸輸出力kg																								
	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250
SYDR22M	1	8	15	22	29	36	43	50	57	64	71	78	85	92	99	106	113	120	127	134	141	148	155	162	169
SYDR30M	4	19	34	49	65	80	95	110	125	140	155	170	185	200	216	231	246	261	276	291	306	321	336	351	367
SYDR45M	22	76	130	184	238	291	345	339	453	507	561	615	669	723	777	830	884	938	992	1046	1100	1154	1208	1262	1316
SYDR55M	48	144	239	335	431	527	623	718	814	910	1006	1102	1197	1293	1389	1485	1581	1676	1772	1868	1964	2060	2155	2251	2347

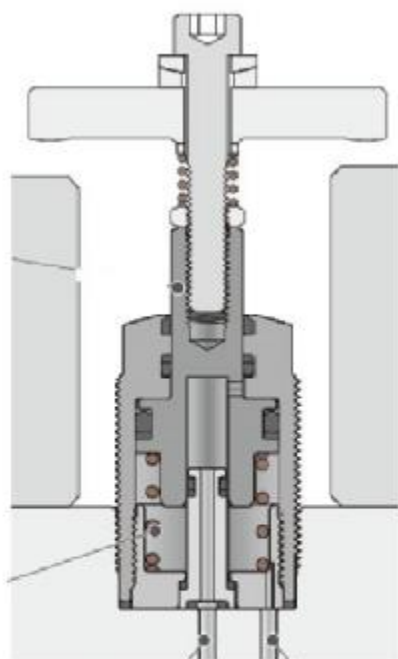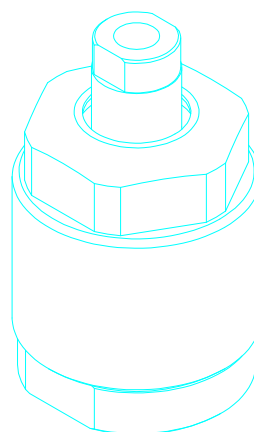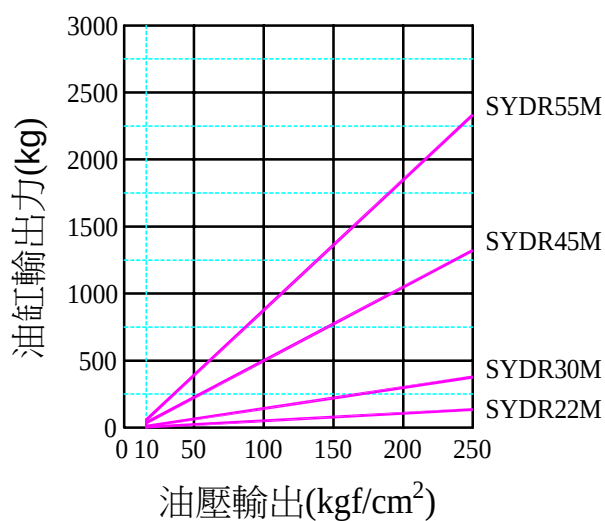

入油口 排氣或放鬆入油口

放鬆狀態(單動雙動皆可)

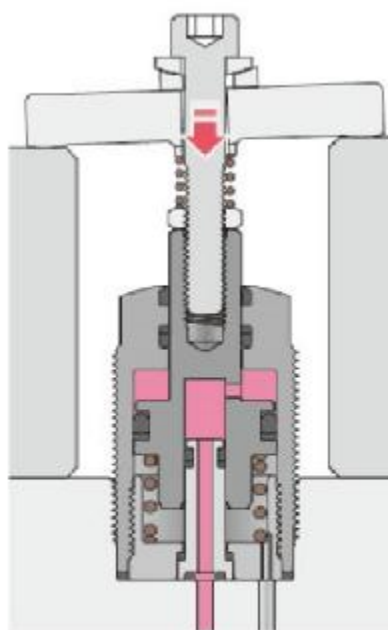

夾緊狀態