


Radar Detector Kit


AND OUTTASIGHT DUALMOUNT
KIT RADAR DETECTOR
CONFIGURATIONS

Use the 3.3" arm to adjust height and
move toward the windshield.

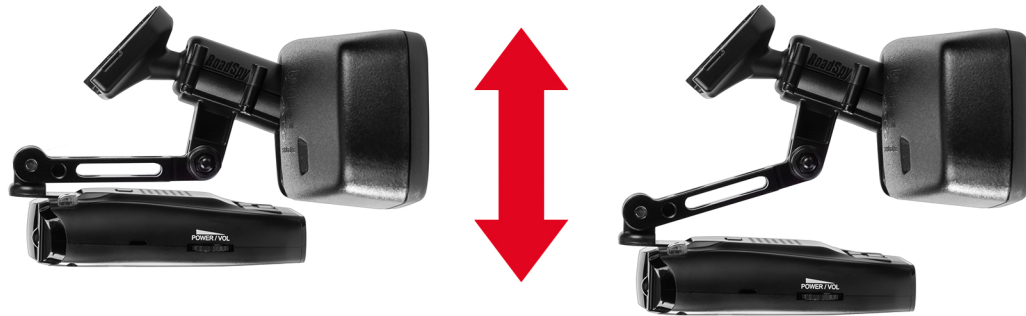

THICK INTERNAL NUT POINTS
TO THE LEFT SIDE OF THE CAR.

USE ROADSPY THUMBSCREW
FOR QUICK CHANGES OR SHORT
SCREW (5) FOR LONG-TERM MOUNTING.

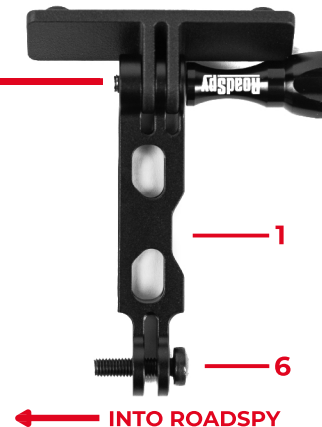

1. 3.3" Extension Arm



2. 2" Extension Arm*



3. 1.4" Extension Arm*



4. Reverse-Direction Arm*



5. Short
Screw




6. Long
Screw

* Included with the optional OuttaSight DualMount Kit (sold separately).

Access additional positions using the
OuttaSight DualMount Kit (sold separately).



ENCASED NUT POINTS
TOWARD THE CAR ROOF.

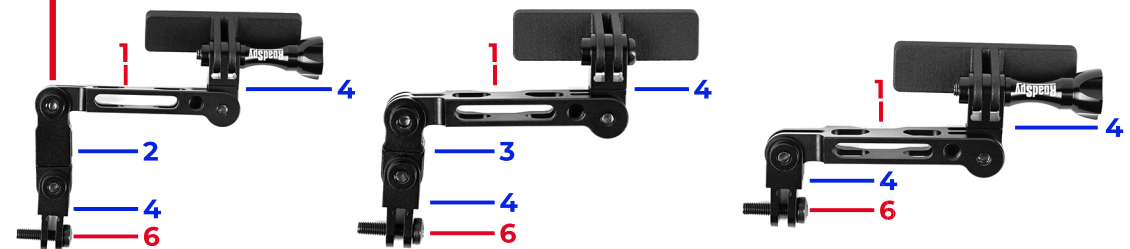

INTO ROADSPY