

Radar Detector Kit

AND OUTTASIGHT DUALMOUNT
KIT RADAR DETECTOR
CONFIGURATIONS



1. 3.3" Extension Arm



2. 2" Extension Arm*



3. 1.4" Extension Arm*



4. Reverse-Direction Arm*




5. Short Screw



6. Long Screw


* Included with the optional OuttaSight DualMount Kit (sold separately).

Use the 3.3" arm to adjust height and
move toward the windshield.

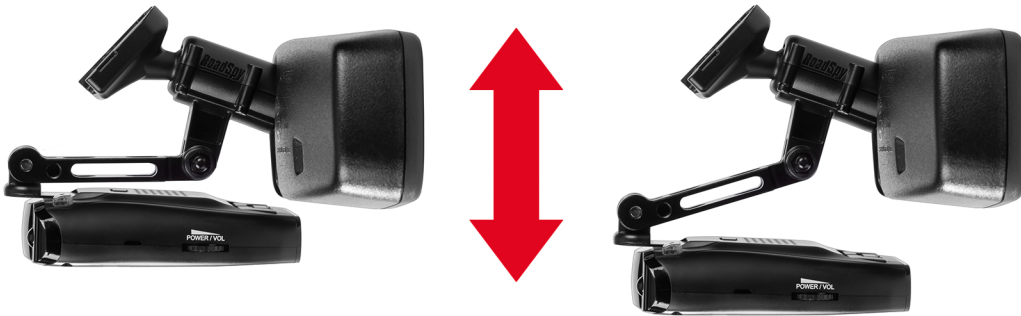

THICK INTERNAL NUT POINTS
TO THE LEFT SIDE OF THE CAR.


USE ROADSPY THUMBSCREW
FOR QUICK CHANGES OR SHORT
SCREW (5) FOR LONG-TERM MOUNTING.

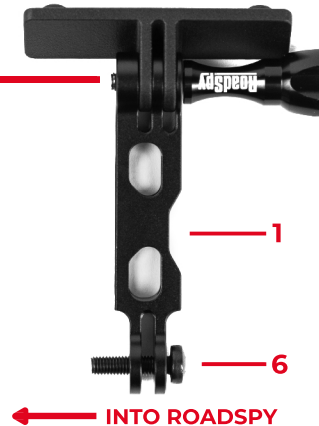

Access additional positions using the
OuttaSight DualMount Kit (sold separately).



ENCASED NUT POINTS
TOWARD THE CAR ROOF.

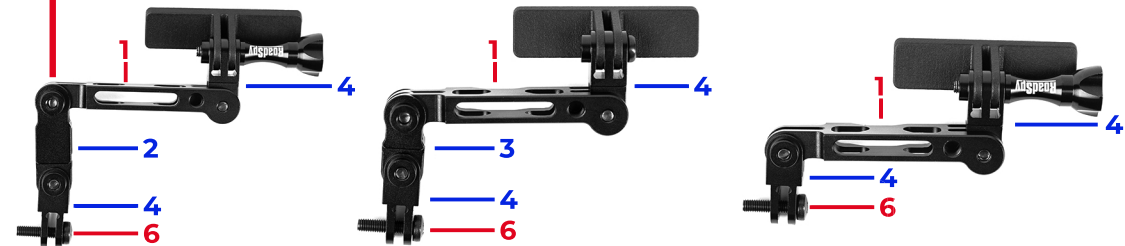

← INTO ROADSPY