


# taylor.

PRODUCED BY

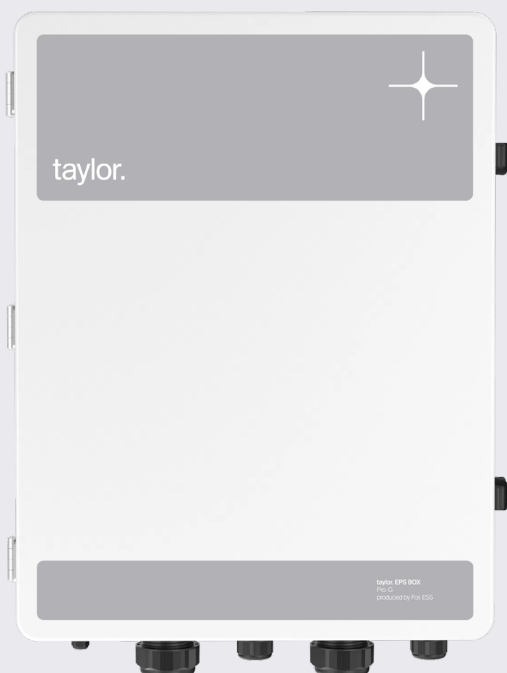

## EPS Box Pro three-phase

Tested and supported (1st/2nd line) by Taylor

Automatically switch to on-grid / off-grid state

PC, robust metal enclosure IP65

Compatible with Taylor H3 and H3 Smart inverters

[taylor.solar](https://taylor.solar)



|                                          |                                   |
|------------------------------------------|-----------------------------------|
| Model                                    | EPS Box Pro                       |
| Utility supply                           |                                   |
| Rated voltage (VAC)                      | 220 / 380, 230 / 400, 3L / N / PE |
| Rated frequency (Hz)                     | 50 / 60                           |
| Max. input current (per phase) (A)       | 63                                |
| Inverter grid                            |                                   |
| Rated voltage (VAC)                      | 220 / 380, 230 / 400, 3L / N / PE |
| Rated frequency (Hz)                     | 50 / 60                           |
| Max. input current (per phase) (A)       | 25                                |
| Inverter EPS                             |                                   |
| Rated voltage (VAC)                      | 220 / 380, 230 / 400, 3L / N / PE |
| Rated frequency (Hz)                     | 50 / 60                           |
| Max. input current (per phase) (A)       | 25                                |
| Load                                     |                                   |
| Rated voltage (VAC)                      | 220 / 380, 230 / 400, 3L / N / PE |
| Rated frequency (Hz)                     | 50 / 60                           |
| Max. input current (per phase) (A)       | 63                                |
| Communication interface                  |                                   |
| RS-485                                   | Meter                             |
| General data                             |                                   |
| Cooling concept                          | Natural                           |
| Installation                             | Wall-mounted                      |
| Operating temperature range (°C)         | -25 ~ 60 (derating at 45)         |
| Dimensions (W x H x D) (mm)              | 550 x 420 x 138.5                 |
| Dimensions of packaging (W x H x D) (mm) | 660 x 515 x 235                   |
| Net weight (kg)                          | 16                                |
| Gross weight (kg)                        | 19.3                              |
| Ingress protection                       | IP65                              |
| Warranty                                 |                                   |
| Product Warranty                         | 10 years (backed by FOX ESS)      |