


HK5920 Series POS Terminal

Powered by an 11th Gen Intel® i3 CPU, the HK5920 delivers reliable, high-speed performance in a rugged die-cast aluminum housing. Its low-profile, foldable base with multiple height adjustments and VESA mount capability ensures adaptability in any space, while its full suite of connectivity ports supports seamless integration across operations. With a sleek design and small footprint, the HK5920 is built for both style and substance.



Built for the hospitality industry powerful and space-saving

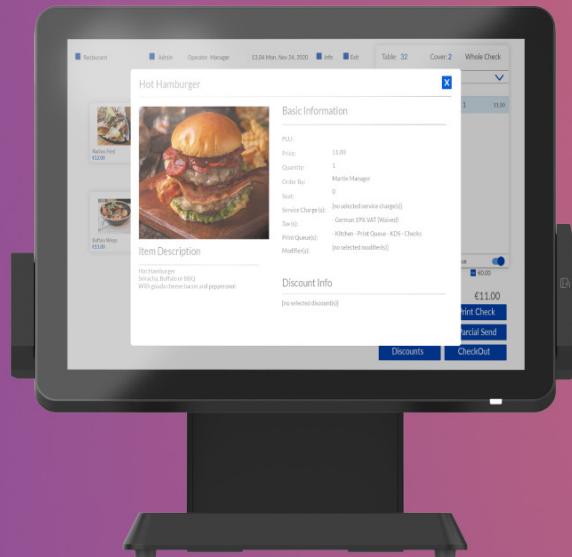

Low-Profile, foldable base,
Multiple Height Adjustments
and VESA mount Capability



Carries the full suite of
multiple ports:
USB2.0&USB3.0, Serial, Cash
Drawer and Network LAN



Dual hinge for flexible
adjustment. Die-cast
aluminum housing for high
reliable

Technical specs	HK5920
Processor	Intel Tiger Lake UP3, Intel 11thGen CPU : Core i3 11gen
Operating system	Windows 10 LTSC / Windows 11 LTSC
Memory	SO-DIMM DDR4 3200MHz 8GB, up to 16GB
Storage	2.5inch SATA SSD 128GB, up to 512GB - M.2 drive 128GB, up to 512GB
Display panel	15" TFT LCD (LED back light) /4:3 /resolution: 1024 x 768
Touch screen	True flat capacitive touch screen
Power supply	24V 60W(standard) ; 24 90W/120W(for with 80mm printer)
Speaker	2*3W Speaker
I/O Ports	7* USB : 2* USB 3.0; 5* USB 2.0 (included 1*24V Powered USB); 3* RJ50 COM Ports; 1* RJ45 100M/1000M Gigabit LAN; 1* HDMI for second display; 1* 24V Power-in; 1* 12V DC Output for second screen; 1* Audio,3.5mm; 1* 24V RJ11 for Cash drawer
Dimensions (L x W x H)	349x252x332 mm
Weight	5 KG
Optional peripherals	Card reader MSR only (3 tracks MSR) MSR+RFID (Supports MIFARE one and MIFARE CPU card)
	Fingerprint reader Fingerprint reader
	Stand Normal Desktop Stand
	Wall mount Wall mount bracket
	Second display 15" second screen / resolution: 1024*768(Touch/non-Touch) 10.4" second screen / resolution: 800 x 600(Touch/non-Touch) 2x20 characters VFD
	Wireless Dual-band Wi-Fi® 802.11a/b/g/n/ac 2.4GHz/5GHz - BT5.0
Environment	Operating 0°C-40°C/20%-80% RH non-condensing
	Storage -20°C-60°C/10%-90% RH non-condensing
EMC & Safety	FCC /CE / RoHS
Tilt Adjustment	Single display: 0-150° (Vertical) - Dual display:0-45° (Vertical)
Colour	Dark Gray

24/7 global support



With support teams in the Americas, Europe, Middle East and Asia Pacific we provide individual software and hardware support; as well as remote troubleshooting. Already serving 7,000+ outlets in the world, we understand the importance of support and what it takes to keep your business running non-stop.

Contact us

Europe & Africa
sales-eu@shijigroup.com
Tel: +49 8941207171

Middle East
sales-me@shijigroup.com
Tel: +971 45786947

Greater China
sales@shijigroup.com
Tel: +86 10593253882

Asia Pacific
sales-ap@shijigroup.com
Tel: +65 62407400

United States
sales-us@shijigroup.com
Tel: +1 4049484001

Canada & Latam
sales-can.list@shijigroup.com
sales-latam@shijigroup.com

 shijigroup.com

 Shiji Group

