
Rental equipment

GMC Lifting Solutions

Subsea Load Shackles

Range from 6.5 to 1500 ton.
Standard Van Beest G-4163 and P-6036 safety bow shackle.
Depth rating up to 3060 meter (300 Bar).
Output via SubConn connector c/w locking collar. X meters of subsea cable with moulded mating SubConn connector.
Stainless steel load pin, down hole strain gauged, die-lectric gel filled.
Dual gauging optional
Mv/v /4-20ma/ RS 485 outputs available.
Stainless steel load bobbin as standard

Display options to suit your application:
- Standard battery operated (ELC01) handset
- RS 485 output for logging to a mains operated stainless steel display panel with multiple outputs/ alarms/ data logging and video graphic recording.

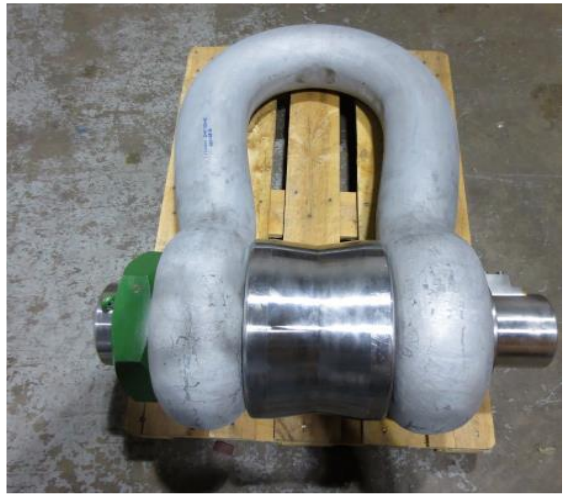

Load shackle with bobbin



ELC01 display

Rental equipment

In inch

working load limit	diameter bow	diameter pin	diameter eye	width eye	w in
t	a inch	b inch	c inch	d inch	in
0.5	1/4	5/16	21/32	9/32	
0.75	5/16	3/8	25/32	11/32	
1	3/8	7/16	7/8	13/32	
1.5	7/16	1/2	1 1/32	7/16	
2	1/2	5/8	1 11/32	1/2	
3.25	5/8	3/4	1 9/16	5/8	1
4.75	3/4	7/8	1 13/16	3/4	1
6.5	7/8	1	2 1/16	7/8	1
8.5	1	1 1/8	2 5/16	31/32	1
9.5	1 1/8	1 1/4	2 19/32	1 3/32	1
12	1 1/4	1 3/8	2 27/32	1 1/4	2
13.5	1 3/8	1 1/2	3 5/32	1 3/8	2
17	1 1/2	1 5/8	3 15/32	1 1/2	2
25	1 3/4	2	4 1/16	1 25/32	2
35	2	2 1/4	4 3/8	1 31/32	3
42.5	2 1/4	2 9/16	5 1/8	2 1/4	3
55	2 1/2	2 3/4	5 23/32	2 9/16	4
85	3	3 1/4	6 3/8	2 7/8	5

6 7 8 9 0 1 2 3 4 5

working load limit	diameter bow	diameter pin
t	a inch	b inch
120	3 3/4	3 3/4
150	4 1/8	4 1/4
200	4 23/32	5 1/8
250	5 1/8	5 1/2
300	5 1/2	5 29/32
400	6 11/16	6 7/8
500	7 3/32	7 9/32
600	7 7/8	8 1/16
700	8 9/32	8 15/32
800	8 9/32	8 21/32
900	8 21/32	9 1/16
1000	9 7/16	9 7/16
1250	10 1/4	10 5/8
1500	11 1/32	11 13/32