

EASY TOUCH 2

7" touch screen, user-friendly and fully programmable
Connection USB. Free software online for programming, telemetry, data analysis...
Videos display (ads, instructions...)
37 available languages
8 dosing signals as standard

G FACTOR

High G factor: reduced residual moisture, reduced drying time, energy savings

EFFICIENCY

Optimized consumption: automatic or manual adjustment of water levels and detergents according to the load
Water Saving system: 3 configurable levels of savings
Ready for water recovery tanks AQUABAC

VERSATILITY

ELECTRIC <> HOT WATER
MAKE TO ORDER: possibility to customize
WET CLEANING as standard

CONNECTIVITY

Communication Danube Online - IoT as standard
Remote technical service
Management of laundry
Multi-payment system

ERGONOMICS

Big aluminium door
Easy door lock system

MAINTENANCE

Hinged panel: easy access to parts
Technical menu: statistics, errors...

OTHERS

Free standing: no anchoring to the floor
Stainless steel vat and drum, skinplate outer casing
3 water inlets
Detergents box with compartments
Imbalance controlled by frequency inverter
CE standards and KIWA for REG4 standards



OPTIONS


- Dosing pumps kit DQ-2
- RT Ready for AQUABAC XL conn. 3/4" for washers WEN/WED-11/14/18/22/28
- Additional dosing pump DB-1
- DD Double drain kit WED-14-18-22
- NC Normally closed valve WED-18/22
- Kit WATERMARK Australia
- RC AQUA FLOW water recirculation kit WED-18 (not available with AQUABAC)
- LG Level feet kit WED-11 to 28
- WS weighing system WED-11 to 45C (additional 6 dosing signals included)
- XD 6 extra dosing signals card WED-11-45C
- SG Silicon gasket WED-18-22-28
- RD reverse door opening
- TR Protected board ET2 for WED-11-45C (standard on 60 to 120 kg models)
- Steam kit WED-11 to 22 (to transform E or HW models to steam)
- Mops plinth stainless steel WED-18/22
- Mops plinth skinplate WED-18/22
- Self plinth same height of machine stainless steel WED-18/22
- Self plinth same height of machine skinplate WED-18/22
- Ergonomic plinth stainless steel WED-18/22
- Ergonomic plinth skinplate WED-18/22
- 440V 3~ (No N) 50/60 Hz 18/22
- SSC Stainless steel outer casing WED-18
- SSF Stainless steel front panel WED-18
- IoT licence - Danube Online
- Several payment systems for self-service
- UD Kit temporized door opening WED-WEN

| DRUM | UNIT. | WED-18 ET2 | |
|---|--------------|---------------|---------------|
| Capacity 1/9 | Kg | 20 | |
| Capacity 1/10 | Kg | 18 | |
| Volume | l | 180 | |
| Diameter | mm | 700 | |
| Depth | mm | 470 | |
| GENERAL DETAILS | | | |
| Washing speed / Spining speed | r.p.m. | 47 / 1.133 | |
| G Factor | - | 500 | |
| Maximum force transmitted | KN | 3,41 ±1,4 | |
| Frequency-dynamic force | Hz | 16 | |
| Noise level | dB | < 70 | |
| Coin laundry version | - | YES | |
| Double drain | - | OPT. | |
| Weighing system | - | OPT. | |
| Tilting system | - | NO | |
| DOOR | | | |
| Height door bottom | mm | 450 | |
| Diameter | mm | 460 | |
| POWER | | | |
| Motor | kW | 2,2 | |
| Electric heating power | kW | 12 | |
| Total electric power (electric model) | kW | 12,75 | |
| Total electric power (hw, steam model) | barG | 2,2 | |
| CONNECTIONS | | E | HW/S |
| Tension 110V - I + N + T | Nº x mm² / A | - | - |
| Tension 230V - I + N + T | Nº x mm² / A | 2x16+T - 63A | 2x1,5+T - 16A |
| Tension 230V - III + T | Nº x mm² / A | 3X6+T - 40A | - |
| Tension 400V - III + N + T | Nº x mm² / A | 4x4+T - 32A | - |
| Steam inlet (Steam model) | inch | 1/2" | 1/2" |
| Maximum steam consumption (Steam model) | Kg/h | 12 | |
| Water inlet | inch | 3/4" | |
| Water main pressuer | Kgs/cm² | 2-4 | |
| Maximum water consumption* | Lit/h | 118,3* | |
| Drain | mm/inch | 3" | |
| Drainage capacity | Lit/min | 200 | |
| DIMENSIONS / PACKING DIMENSIONS | | | |
| Net Width/Gross width | mm | 884 / 945 | |
| Net Depth/Gross depth | mm | 913 / 1.030 | |
| Net Height / Gross height | mm | 1.405 / 1.680 | |
| Net weight / Gross weight | kg | 344,5 / 388 | |
| Volume | m³ | 1,63 | |

* Program number 20: WED-11 to WED-80C at 75% load /WED-100C and 120C at 100% load.

** 400V version / 230V version



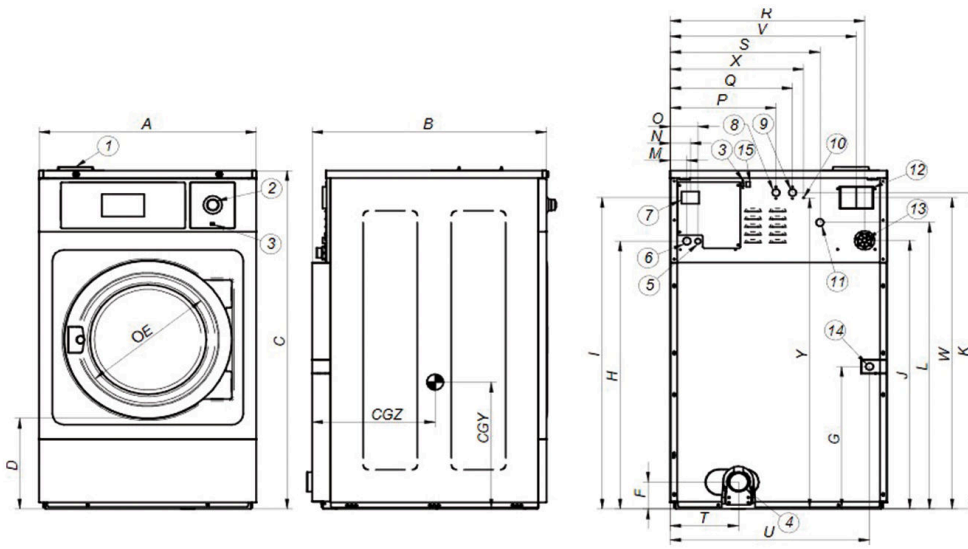

1. Soap dispenser
2. Emergency stop
3. USB port
4. Drain
5. Electric connection to liquid soap pumps
6. Electrical connection
7. Main switch
8. Auxiliar water inlet
9. Hot water inlet
10. Equipotential connection
11. Cold water inlet
12. Blur output / water overload
13. Liquid soap connection
14. Steam connection
15. Ethernet port

| | | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | R | S | T | U | V | W | X | Y | CGY | CGZ |
|---------------|----|-----|-------|-------|-----|-----|----|-----|-------|-------|-------|-------|-------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-------|-----|-------|-----|-----|
| WED-18 | mm | 884 | 913 | 1 405 | 450 | 460 | 95 | 380 | 1 135 | 1 303 | 1 138 | 1 322 | 1 207 | 61 | 74 | 101 | 429 | 509 | 802 | 640 | 348 | 814 | 772 | 1 303 | 569 | 1 297 | 464 | 702 |
| WED-22 | mm | 884 | 1 003 | 1 405 | 450 | 460 | 95 | 380 | 1 135 | 1 303 | 1 138 | 1 322 | 1 207 | 61 | 74 | 101 | 429 | 509 | 802 | 640 | 348 | 814 | 772 | 1 303 | 569 | 1 297 | 464 | 747 |

