

SPEED QUEEN® ON-PREMISES LAUNDRY SOLUTIONS

Tumble Dryer

SDR250

SDR285

SDD285

SDR345

Features and Benefits

- Standard galvanized drum with large diameter
- Large door opening for easy loading & unloading
- Eco Version: all dryers are available with reduced kw heating element
- Radial And Axial Airflow: for maximal heat transfer, low energy consumption and short drying time
- Self cleaning lint screen

Options

- Coin operated
- Stainless steel front
- Reversing drum
- Double door glass and insulation
- Residual moisture control Sensodry:
 - safe drying of delicate linen
 - humidity detection in %
 - ideal in combination with SoftWash®
 - ideal for dry cleaners, fire depts
 - available on Easy and Full Control
- WiFi kit - to order through Accessories

Control

- Easy - To - Use Microprocessor (ECT) - intuitive control with simple selection of 3 programs
- Full Control Programmer (FCT) - fully programmable timer with possibility of residual moisture control




SDD285

Tumble Dryer

| | | SDR250 | SDR285 | SDD285 | SDR345 |
|---------------------------|---------|---|---------------|---------------|---------------|
| CAPACITY | | | | | |
| Capacity 1:18 | kg (lb) | 12(26) | 16(35) | 2x16(2x35) | 19(42) |
| Capacity 1:22 | kg (lb) | 11(24) | 13(29) | 2x13(2x29) | 16(35) |
| Drum volume | l | 250 | 285 | 2x285 | 345 |
| Drum diameter | mm | Ø 760 | Ø 760 | 2xØ 760 | Ø 760 |
| AIRFLOW | m³/h | 520 | 550 | 1050 | 600 |
| DRYING AVERAGE | l/min. | 190 | 225 | 2x225 | 300 |
| MOTORS | | | | | |
| Fan | kW | 0,55 | 0,55 | 2x0,75 | 0,55 |
| Drive | kW | 0,25 | 0,25 | 2x0,25 | 0,25 |
| GAS HEATING | | | | | |
| Gas connection | NPT | 1/2" | 1/2" | 2x1/2" | 1/2" |
| Electrical connection | | 3x220 - 240V 50Hz, 1x220 - 240V 50Hz, 3x380 - 415V 50Hz | | | |
| Energy | kW | 16,5 | 19,5 | 2x19,5 | 25 |
| | kBTU/h | 56,3 | 66,5 | 2x66,5 | 85,3 |
| STEAM HEATING | | | | | |
| Steam connection | NPT | 3/4" | 3/4" | 3/4" | 3/4" |
| Electrical connection | | 3x220 - 240V 50Hz 1x220 - 240V 50Hz 3x380 - 415V 50Hz | | | |
| Steam output * | kW | 16,5 - 22 | 19,5 - 27 | 2x19,5 - 27 | 22 - 32 |
| Steam pressure | bar | 3 - 6/7 - 10 | 3 - 6/7 - 10 | 3 - 6/7 - 10 | 3 - 6/7 - 10 |
| ELECTRICAL HEATING | | | | | |
| Electrical connection | | 3x220 - 240V 50Hz, 3x380 - 415V 50Hz, 3x480V 60Hz | | | |
| Energy | kW | 13,5 | 18,0 | 2x18,0 | 24,0 |
| EXHAUST | mm | 200 | 200 | 200 | 200 |
| DIMENSIONS | | | | | |
| H×W×D | mm | 1680x795x1070 | 1680x795x1160 | 2030x795x1240 | 1680x795x1280 |
| Net weight | kg | 230 | 250 | 370 | 250 |
| TRANSPORT DATA | | | | | |
| Packed H×W×D | mm | 1785x855x1100 | 1785x855x1190 | 2120x880x1325 | 1785x855x1310 |
| Gross weight | kg | 240 | 265 | 385 | 270 |

* Steam output is flexible depending on steam pressure, The data concerning dimensions of machines include all extended parts

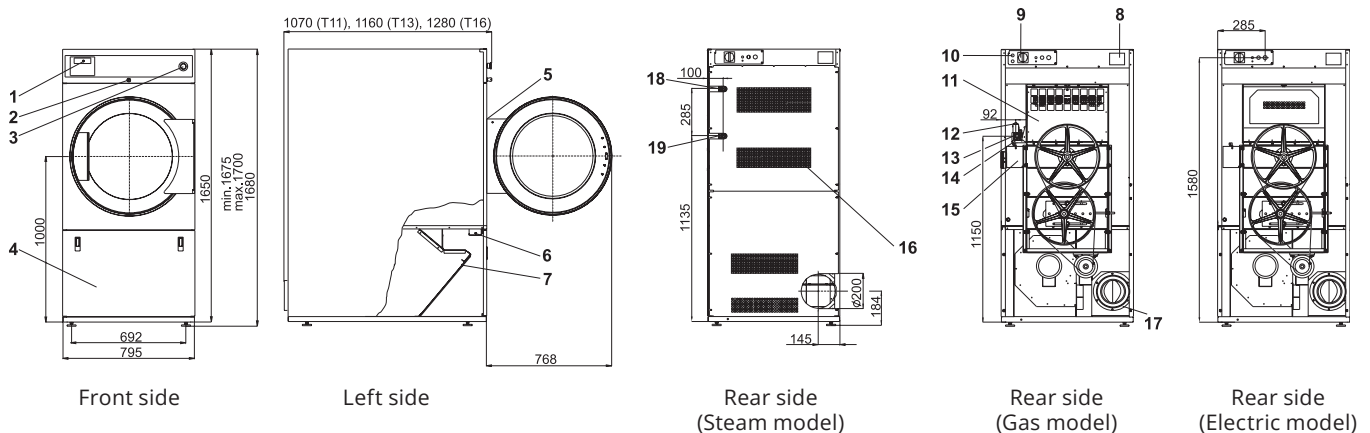

- | | | |
|---|--|--|
| 1. Programmer | 7. Name plate | 14. Airflow switch |
| 2. Emergency stop button (not applicable for version with coin meter) | 8. Main switch | 15. Suction |
| 3. Lint screen cover | 9. Main power supply | 16. Exhaust piping |
| 4. Door lock microswitch | 10. Heating chamber | 17. Coin meter (version with coin meter) |
| 5. Lint cover microswitch | 11. Gas valve (G models only) | 18. Coin box (version with coin meter) |
| 6. Lint screen | 12. Pressure regulator (G models only) | |
| | 13. Gas supply (G models only) | |