



SF

SD

## Best-in-class Quantum<sup>®</sup> Gold Controls

Revolutionary Quantum<sup>®</sup> Gold technology combines equipment controls, programming and wireless networking into one full-store management system, including: wireless networking, adjustable water levels and in-depth reporting. Designed to reduce costs and maximize revenue, Quantum gives you the power to achieve unprecedented levels of profitability.

#### Washer features

- Stainless steel outer and inner drum
- Industry-leading 440 G-Force extraction removes more moisture, minimizing drying times and utility costs
- Totally freestanding: can be installed on any floor and any level
- Suspension with new out-of-balance logic
- Soap box with four compartments
- Top, Front and side panels standard available in anthracite grey
- Electrical heating or boiler-fed
- 6 wash programs
- Time remaining countdown

#### **Quantum Controls**

- 6 programs
- 3 cycle modifiers
- LED notification
- Programmable by Infra Red
- Time remaining countdown

## **Dryer features**

- Oversized lint filter located in front for easy cleaning
- Galvanized steel cylinder
- Powerful exhaust blower assures short drying times and low operating costs
- Wide door opening of 180° for easy loading and unloading
- Top, Front and side panels standard available in anthracite grey
- Electrical or gas heating
- Led indication of the status of the program
- Time remaining countdown

### **Quantum Controls**

- 4 drying programs
- LED notification
- Programmable by Infra Red

# Connectivity

Wi-fi connectivity via accessory, enabling access to Speed Queen Insights and Speed Queen App.







Operation





Lasts Longer



# Front load washer


# Specifications



	SF   Washer				
	NF3JGBSP403UG01	NF3JGBJP403UG43	NF3JGBS <b>G</b> 403UG01	NF3NGBJG403UG44 - MOP -	NF3JGBSP403NG22
Market	Europe/CE	Europe/CE	Europe/CE	Europe/CE	No agency
Actuation	OPL¹/PCP²	OPL¹/PCP²	OPL¹/PCP²	OPL¹/PCP²	OPL¹/PCP²
Basket	Stainless	Soap inject./grey boot	Stainless	Soap inject./grey boot	Stainless
Drain	Pump	Pump	Gravity drain	Gravity drain	Pump
Capacity	10.5 kg	10.5 kg	10.5 kg	10.5 kg	10.5 kg

<sup>&</sup>lt;sup>1</sup>On Premise Laundry <sup>2</sup>Prep for Central Pay

		SF
DRUM VOLUME	I	96,8
MOTOR		
Frequency controlled	kW	0,67
Extraction speed	rpm	1200
G-factor	kW	440
ELECTRICAL CONNECTION		400V/50Hz/3N
ELECTRICAL HEATING	kW	4,8
DIMENSIONS H×W×D	mm	1027×683×704
Net weight	kg	113
Volume (packed)	m³	0,71
Packed H×W×D	mm	1150x760x860
Gross weight	kg	122

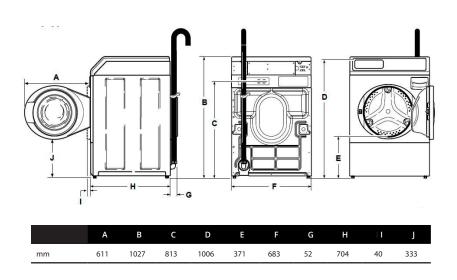

# Dryer

# Specifications



	SD   Dryer				
	ND3NGBGS403UG01	NDENGBGS303UG01	NDGNGBGS303UG01		
Market	Europe/CE	Europe/CE	Europe/CE		
Actuation	OPL¹/PCP²	OPL <sup>1</sup> /PCP <sup>2</sup>	OPL¹/PCP²		
Heating	Electric*	Electric*	Gas		
El. connection	400V/50Hz/3N	230V/50Hz/1N	230V/50Hz/1N		

<sup>&</sup>lt;sup>1</sup> On Premise Laundry <sup>2</sup> Prep for Central Pay

		SD
Capacity	kg	10,5
Drum volume	- 1	198
ELECTRICAL HEATING		5,2 (230V), 5,3 (400V)*
GAS HEATING	kW	7,3
MOTOR POWER	rpm	0,25
Exhaust	mm	102
DIMENSIONS H×W×D	mm	1027×683×711
Net weight	kg	68
Volume (packed)	m³	0,71
Packed H×W×D	mm	1150x760x860
Gross weight	kg	73

