

TDC1481HC.S

Professional dryer

General description

TDC1481HC.S
Product line: Professional
Installation: Freestanding
Drying capacity: 1-8 kg
Number of programmes: 12
Energy class: A++
Type of dryer: Heat pump dryer
Type of display: LCD
Anticrease
Main colour: Stainless Steel



Construction & Performance

- Long lasting stainless steel drum
- Durable brushless motor
- Heat pump
- Sensor and time controlled drying
- Drum volume: 145 l
- Payment system: Prepared
- Butterfly drying system

Use & flexibility

- Volume of container for condensed water: 6 l
- Yes, Asko double lint filter
- Door diameter: 34 cm
- Door opening angle: 180 °
- Anticrease
- Time setting
- Humidity sensor
- Automatic condenser filter cleaning

Interaction & Control

- Remaining time indication
- Type of display: LCD
- End of programme sound signal
- Program memory
- Available languages in control unit: CZ, DA, DE, EN, ES, EE, FI, FR, HR, IT, JP, LT, LV, NL, NO, PL, RU, SK, SL, SV, ZH, ZH-CN

Programs

- 12 programmes
- Auto dry
- Auto normal dry - for thicker, non-sensitive cotton fabrics

Design & integration

- Default door opening: Reversible door opening
- Adjustable feet: 15 mm
- Loading position: Front

Safety & Maintenance

- Overheat protection
- Thermal and electronic protection against overheating

Technical data

- Noise level: 67 dB(A)re 1 pW
- Power consumption in standby mode: 0,8 W
- Power consumption in off mode: 0,4 W


- Estimated annual energy consumption: 234,6 kWh
- Energy class: A++
- Condensation efficiency class: A
- Grounded plug
- Plug type SHUKO
- Connected load: 1000 W
- Fuse: 10 amp
- Frequency: 50 Hz
- Net weight: 57,4 kg
- ISO 9001 certified manufacturer

Dimensions

- Product dimensions (HxWxD): 85 × 59,5 × 76,9 cm
- Depth with door open: 1165 mm
- Length electrical cord: 2,1 m
- Left, right, back

Logistic information

- Dimensions of packed product (HxWxD): 92 × 64 × 83,8 cm
- Gross weight: 62 kg
- Product code: 737973
- EAN code: 3838782477171

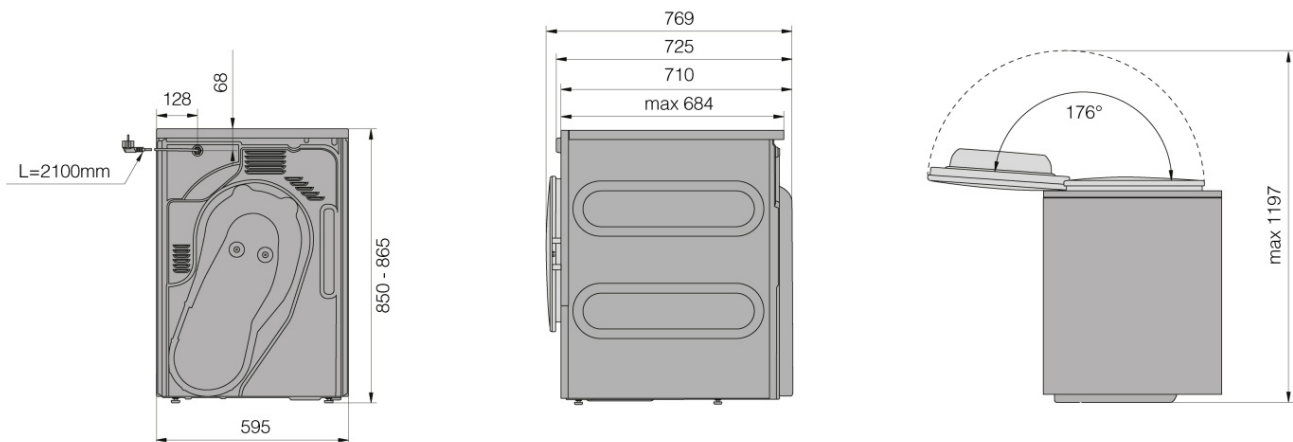



WMC8943PC.S

Professional washing machines

General description

Product group: Professional washing machines
 Installation: Freestanding
 Loading capacity: 9 kg
 Spin speed: 1400 rpm
 26 programs
 Energy class: B
 Main colour: Stainless Steel



Programs

- Heavy 90°C
- Heavy 60°C
- White wash 90°C
- White/Colour 60°C
- White/Colour 40°C
- Quick wash 60°C
- Quick wash 40°C
- Synthetic 40°C
- Wool/Hand 30°C
- Rinsing
- MOP 90°C
- MOP 60°C
- Microfibre 60°C
- Microfibre 40°C
- Disinfection 40°C
- Disinfection 60°C
- Disinfection 90°C
- Allergy cotton 60°C
- Allergy cotton 90°C
- Allergy synthetics 40°C
- Allergy synthetics 60°C
- Drum cleaning

Options

- Adjustable spin speed: No
- Super wash

Construction & Performance

- Quattro Construction™ – vibration-free spinning
- Door: Smart Seal™
- Long lasting stainless steel drum
- Active Drum™ - for a careful yet effective wash cycle.
- Heater power: 3000 W
- Precise temperature control (max deviation: +/- 1 °C)
- Water level sensor
- Drum volume: 80 l
- Drum volume (USA): 2,8 cu ft
- Brushless motor
- Payment system: Prepared
- Automatic Dosing System: Prepared external
- Shortest program time: 40 min
- Drain system: Pump

Use & flexibility

- Easy close door
- Liquid detergent insert
- Temperature range: Cold-90°C
- Door diameter: 31 cm
- Door opening angle: 180 °

Interaction & Control

- Up to 100 hours
- Remaining time indicator
- Type of display: LCD display
- 26 programs
- Available languages in control unit: CZ, DA, DE, EN, ES, EE, FI, FR, HR, IT, JP, LT, LV, NL, NO, PL, RU, SK, SL, SV, ZH, ZH-CN

Design & integration

- Door opening: Hinge on left side
- Adjustable feet: 10 mm
- ASKO tumble dryer can be mounted on top of the washer
- Size 3/4" - Can be connected to hot and cold water
- Loading position: Front

Safety & Maintenance

- Removable lifters for easy cleaning
- Maximized water inlet time
- PEX inlet hose
- Anti Block™ - Self cleaning drain pump.
- Overflow protection
- Emergency door opening key
- Lockable control panel
- Unbalance detection - protects the washer against harmful vibrations.
- Draining capacity: 20 l/min
- Overheat protection
- Thermal and electronic protection against overheating

Technical data

- G-factor: 530
- Spin drying efficiency class: B
- Moisture remaining: 49 / 49 / 49
- Heater power: 3000 W
- Drum volume: 80 l
- Size 3/4" - Can be connected to hot and cold water
- Counter weight material: Cast iron
- Counter weight (kg): 10,4 kg
- Noise level spinning: 75 dB(A)re 1 pW
- Noise spinning class: B
- Energy consumption per 100 cycles: 53 kWh
- Energy consumption per cycle for the Eco program 40–60 °C: 0,53 kWh
- Water consumption per cycle for the Eco program 40–60 °C: 41 l
- Consumption in off mode: 0,48 W
- Consumption in standby mode: 0,48 W
- Energy class: B
- Connected load: 3200 W
- Number of phases: 1
- Fuse: 16 amp
- Frequency: 50 Hz
- Net weight: 92 kg
- ISO 9001 certified manufacturer
- ISO 14001

Dimensions

- Product dimensions (HxWxD): 85 × 59,5 × 70,6 cm
- Adjustable feet: 10 mm
- Depth with door open: 965 mm
- Length electrical cord: 2,1 m
- Length inlet hose: 150 cm
- Length outlet hose: 160 cm

Logistic information

- Dimensions of packed product (HxWxD): 92 × 64 × 77,6 cm
- Gross weight: 95,4 kg
- Product code: 738294
- EAN code: 3838782496752
- Market: Professional

