



WPR-10 ET2

Professional washers



VERSATILITY

STANDARD <> SELF-SERVICE

ELECTRIC <> HOT WATER

VALVE <> DRAIN PUMP

SINGLE <> STACKED

Suitable for many sectors: gyms, restaurants, campings, laundromats...



FEATURES

FEATURES

High G Factor 450.

ET2 control with a 4,3" touch screen easy to use and fully programmable

8 dosing signals as standard

USB connection. Free software online for programming, telemetry, data analysis...

WET CLEANING as standard

Short washing cycles (heating power 6 kw)



CONNECTIVITY

Danube Online communication - IoT as standard

Remote maintenance

Management of laundry

Multi-payment system



EFFICIENCY

Optimized consumption: automatic or manual adjustment of water levels and detergents according to the load

High G factor: reduced residual moisture, reduced drying time, energy savings

Water Saving system: 3 configurable levels of savings



ROBUSTNESS

Skinplate outer casing, aluminium door

AISI-304 stainless steel drum, vat and ribs

No inner drum seal: easy to clean

Industrial house bearing and bearings: until

20 000 working hours

Industrial gear and inverter

Industrial door locking system



OTHERS

Free standing: no anchoring to the floor

2 water inlets

4 compartments detergents box

Leveling feet included

Models with drain valve or with drain pump

Imbalance controlled by frequency inverter

CE and WRAS certificates




OPTIONS

- Dosing pumps kit DQ-2
- Additional dosing pump DB-1
- DD double drain kit WPR 8-10 (only model with valve)
- P Drain to pump transformation kit WPR-8/10
- Transformation kit pump to valve WPR-8/10
- SG door silicon gasket WPR 8-10
- RD reverse door opening
- TR Tropicalized model (ET2)
- DS Upper detergent box for WPR 8-10
- XD 6 extra dosing signals card WPR 8-10
- NC Normally closed valve
- Ergonomic plinth WPR-DPR - skinplate
- Ergonomic plinth WPR-DPR - stainless steel
- Mops plinth WPR 8-10 - skinplate
- Mops plinth WPR 8-10 - stainless steel
- Water recovery plinth WPR 8-10 - skinplate
- Water recovery plinth WPR 8-10 - stainless steel
- SSC AISI-304 Stainless steel outer casing WPR 8-10
- UD Kit temporized door opening WPR 8-10
- Supl 380-440V III 50/60 Marine WPR 8-10
- Supl 110-120V/50-60 Hz WPR 8-10
- Several payment systems for self-service
- IoT licence - Danube Online

DRUM	UNIT.	WPR-10 ET2	
Capacity 1/9	Kg	11	
Capacity 1/10	Kg	10	
Volume	l	100	
Diameter	mm	532	
Depth	mm	425	
GENERAL DETAILS			
Washing speed / Spining speed	r.p.m.	50 / 1250	
G Factor	-	450	
Maximum force transmitted	KN	1,57±0,53	
Frequency-dynamic force	Hz	18,33	
Noise level	dB	<70	
Coin laundry version	-	YES	
Double drain	-	OPT.	
Weighing system / Tilting door	-	NO	
SLUICE option	-	NO	
DOOR			
Height center door / Height door	mm	537 / 280	
Diameter	mm	373	
POWER			
Motor	kW	0,75	
Electric heating power	kW	6	
Total electric power (electric model)	kW	6,25	
Total electric power (hw, steam model)	kW	0,75	
CONNECTIONS		E	HW
Tension 110V - I + N + T	Nº x mm² / A	-	2x1,5+T - 16A
Tension 230V - I + N + T	Nº x mm² / A	2x6+T - 40A	2x1,5+T - 16A
Tension 230V - III + T	Nº x mm² / A	3x2,5+T - 20A	-
Tension 400V - III + N + T	Nº x mm² / A	4x1,5+T - 16A	-
Steam inlet (Steam model)	inch	NO	
Maximum steam consumption (Steam model)	Kg/h	-	
Water inlet	inch	3/4"	
Water main pressuer	Kgs/cm²	2-4	
Drain valve	mm/inch	2"	
Drain pump	mm/inch	1"	
Drainage capacity	Lit/min	140	
DIMENSIONS / PACKING DIMENSIONS			
Net / Gross width	mm	680 / 710	
Net /Gross depth	mm	742 / 832	
Net / Gross height	mm	1.040 / 1.158	
Net / Gross weight	Kg	155 / 166	
Volume	m³	0,52 / 0,68	



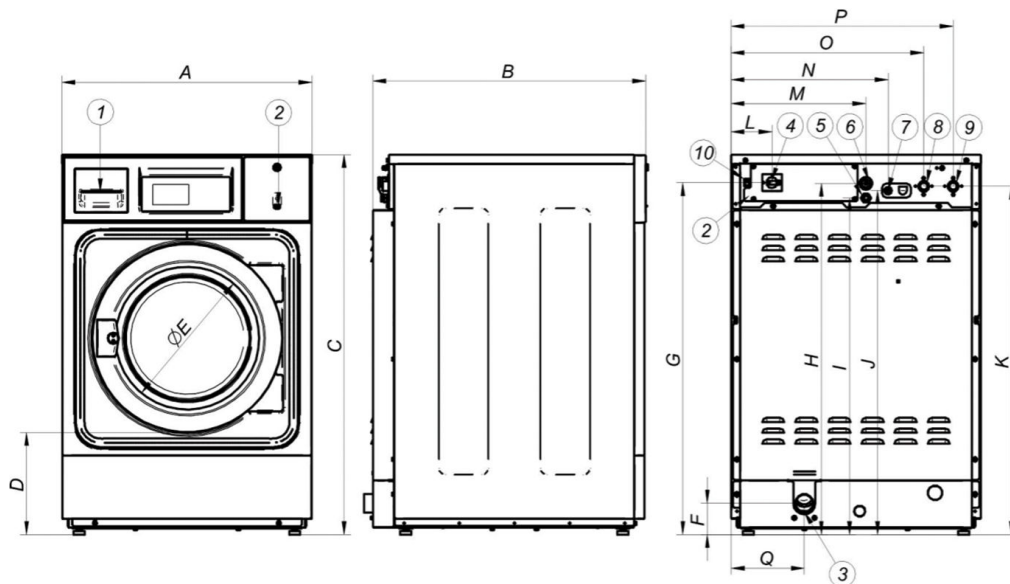

1. Soap dispenser
2. USB port
3. Drain valve/pump
4. Main switch
5. Liquid soap connection
6. Electrical connection
7. Liquid soap inlet
8. Cold water inlet
9. Hot water inlet
10. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
WPR-8 V/P	680	698	1 040	278	373	86	964	962	922	942	954	110	366	427	524	603	199
WPR-10 V/P	680	742	1 040	278	373	86	964	962	922	942	954	110	366	427	524	603	199



DPR-10 ET2

ET2 professional dryers



EASY TOUCH 2

User friendly and totally programmable 4,3"
USB Connection. Online platform free of charge for
programming, telemetry, data analysis...thanks to the IoT
Videos on display (ads, instructions, etc.)
37 languages
8 dosing signals as standard



VERSATILITY

OPL <> COIN
SINGLE <> STACKED
Models can be stacked on top of a washer or on another dryer.
Control panel can be assembled between both drums for better
ergonomics.
Ideal for multiple solutions: hotels, campings, coin laundries,
gyms, etc.
Ready to be used with WET CLEANING programs



FEATURES

Reduced drying times (less than 45 minutes)
6,75 kw heating, option 4,5 kw



CONNECTIVITY

IoT - Danube online standard.
Management of laundries: OPL and COIN
Remote payment



EFFICIENCY

Optimised airflow system
Axial airflow
Wide fluff filter as drawer
Efficient design



ROBUSTNESS

Outer casing in grey skinplate
Robust aluminium big door
Industrial fan and powerful airflow
Sturdy construction of the dryer structure and panels



OTHERS

Gas or electric heated models
Galvanized drum, grey skinplate panels
CE approved



OPTIONS

- Ergonomics plinth WPR-DPR - skinplate (except BASIC)
- Ergonomics plinth WPR-DPR -Stainless steel (except BASIC)
- NG Natural gas heated tumble dryer (LPG as standard)
- SSD Stainless steel drum AISI-304
- SSC Stainless steel outer casing DPR (Except BASIC)
- RD reverse door opening (Except BASIC)
- CU control panel in the bottom (except BASIC)
- TR Tropicalized model (ET2)
- IMC CARE DRY Humidity control (ET2)
- FEX Sprinkler fire extinguisher DPR (ET2)
- Supl. 400V III /230 I/III 60HZ DPR 8-10
- Ergonomic plinth WPR-DPR - skinplate
- Supl 440-480V III 50/60 Marine DPR 8-10
- Ergonomic plinth WPR-DPR - stainless steel
- IoT licence - Danube Online
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	DPR-10 ET2	
Capacity 1/18		Kg	11,1	
		lb	24,5	
Capacity 1/20		Kg	10	
		lb	22	
Ø Drum		mm	590	
		inch	23,2	
Drum length		mm	690	
		inch	27,2	
Drum volume		l	200	
		cu ft	7,06	
Ø Door hole		mm	480	
		inch	18,90	
Door center height		mm	554	
		inch	21,8	
Height from floor to bottom of door		mm	250	
		inch	9,84	
ELECTRIC HEATING				
Evaporation capacity		L/h	6,35	
		US gallon/h	1,68	
Hourly output		Kg/h	12,5	
		lb/h	27,56	
Installed heating power		kW	4,5 / 6,75	
Installed electrical power		kW	4,92 / 7,17	
Drum motor power*		kW	0,37	
GAS HEATING				
Evaporation capacity		L/h	6,35	
		US gallon/h	1,68	
Hourly output		Kg/h	12,5	
		lb/h	27,56	
Installed gas heating power		kcal/h	5761	
		Btu/h	22861	
Installed gas heating power		kW	6,70	
Installed electrical power		kW	0,42	
Instant propane gas consumption (G31)		Kg/h	0,57	
		lb/h	1,26	
Instant natural gas consumption (G20)		m³/h	0,71	
		cfm	0,42	
Ø Gas inlet		BSPP ISO 228-1	1/2"	
VENTILATION				
Fan motor power*		kW	0,37	
Nominal air flow rate		m³/h	300	
		cfm	177	
Ø Fume exhaust		mm	100	
		inch	3,94	
HEAT EMISSION				
Maximum total heat emission		kW	0,5	
		Btu/h	1536	
Max. front heat emission		kW	0,3	
		Btu/h	1075	
CONNECTIONS			E	G
Tension 230V - I + N + T		Nº x mm² / A	3 x 10 / 40A	3 x 1,5 / 10A
Tension 230V - III + T		Nº x mm² / A	4 x 4 / 25A	3 x 1,5 / 10A (1)
Tension 400V - III + N + T		Nº x mm² / A	5 x 2,5 / 16A	3 x 1,5 / 10A (2)
DIMENSIONS / PACKING DIMENSIONS				
Net / gross width		mm	680 / 710	
		inch	26,8 / 28	



Net / gross depth	mm	775 / 832
	inch	30,5 / 32,8
Net / gross height	mm	1.056 / 1.141
	inch	41,6 / 44,9
Net / gross weight	Kg	93 / 111
	lb	204 / 245
OTHERS		
Sound level	dB	62

*Single motor for drum and fan

(1) connect 2 phases and earth

(2) connect phase, neutral and earth

