



TAKEUCHI

TB240

Mini excavator with cabin

The Takeuchi **TB240** mini-excavator with cab offers exceptional power, performance, a large working range and excellent equipment.

Well thought-out features and the high-quality equipment guarantee efficient results. With its 4 tonne operating weight, the TB240 can be effortlessly placed wherever you need it on the construction site – for instance in the construction pit – using a crane.



- » 1st hydraulic circuit, with proportional control with 65,3 l/min
- » 6 LED worklights for optimum illumination of working area
- » Refuelling pump
- » Available in 3 versions: with canopy, with comfort cabin without air-conditioning, with comfort cabin with air-conditioning.



For three hours, two days or a whole year – if you need it for your construction site, you can **buy and rent** your TB240 from us.

www.huppenkothen.com



Huppenkothen added-value equipment:

There is additional equipment that everyone wants.

You therefore get all as standard from Huppenkothen. This makes your excavator more effective, faster and more comfortable.

Put simply – added value.

HYDRAULICS

4 hydraulic auxiliary circuits, 3 of which have proportional control

Flow rates adjustable on the display

1st circuit: 3 memories, 2nd/4th circuit: 1 memory

1st hydraulic auxiliary circuit, with proportional control – max. 65,3 l/min

2nd hydraulic auxiliary circuit, with proportional control – max. 23,5 l/min

3rd hydraulic auxiliary circuit, for hydraulic quick change plate HUPPlate H

4th hydraulic auxiliary circuit, with proportional control – max. 23,5 l/min

Detent Mode – breaker line continuous operation

Hydraulic tank ventilation

Pilot-opened load-holding valve on boom cylinder and arm cylinder

End position damping at boom and swing cylinder

CAB WITH COMFORT EQUIPMENT

Comfort cabin ROPS (ISO12117-2) / OP6 (ISO10262 Level I) / TOPS (ISO12117)

5,7" multifunction colour display incl. fuel and temperature indicator




Exclusive
additional
equipment



Powerful



Spacious and
comfortable
operator cabin



Adjustable
flow rates

Heating and radio

Rear window heating with wiper

Electronically controlled air conditioning with 4 outlet nozzles (optional)

Mechanically cushioned comfort seat

HFM (HUPPIFleetManagement) – telematics system with 4 year term of use, extended for additional charge

ECO mode – to increase economic efficiency

Automatic idle speed control – optimised fuel consumption

Sun shield

TECHNICAL AND SAFETY EQUIPMENT

Double air filter – additional protection for the engine

Spring-loaded accumulator on parking brake

Spring-loaded accumulator on slew brake

Electric refuelling pump

Pressure accumulator for pressure relief of hydraulic circuits and emergency boom lowering

Storage compartment with on-board toolkit

Acoustic overload warning device (EN474-5)

LED worklights

2 x cab at front, 2 x cab at rear, 1 x engine hood at front, 1 x boom

Socket on cab roof for rotary beacon

**Optional additional
equipment and services**

HUPPLub

Huppenkothen central lubrication system to ensure everything runs even more smoothly.

/

HUPPTronic

Digital assistance for excavator operators – economical, comfortable and intuitive to use.

/

HUPPIWarranty

Extended premium warranty package with all-round protection.

/

HUPPIFleetManagement

An eye on every machine at all times with fleet management. First 4 years included in purchase price.



MAIN DIMENSIONS	
Service weight* (kg)	4.220
Total width (mm)	1.740
Overall height (mm)	2.490
Transport length - dozer blade at the rear (mm)	5.380
Digging depth (mm)	3.465
Reach (mm)	5.545
Arm length (mm)	1.600
Tail swing radius (mm)	1.365
Tracks	Rubber
Track width (mm)	350
Ground contact (mm)	1.645
Ground pressure (kg/cm ²)	0,311
Ground clearance (mm)	295
Dozer blade dimensions (mm)	1.740 x 395



* Machine weight + PT + quick change plate + medium size bucket + half a tank of diesel

ENGINE	
Type	Yanmar 4TNV88C 4-cylinder diesel engine Stage V emission level
Exhaust aftertreatment	DPF and DOC
Rated output ISO14396 (kW)	26,7 kW @ 2.200 r.p.m.
Displacement (cm ³)	2.189
Fuel tank (l)	70

WORK PERFORMANCE	
Travel speed (km/h)	2,9 (1 st gear) / 5,3 (2 nd gear)
Slew speed (rpm)	9,6
Gradeability (degrees/%)	30 / 58
Boom swing angle l/r (°)	77 / 57
Digging force bucket (kN)	30,8
Digging force arm (kN)	18,3
Digging force boom (kN)	19,9

HYDRAULIC SYSTEM	
Hydraulic pumps	2 x variable axial piston pump + 2 x gear pump
Pump pressure (bar)	240 x 240 x 206 x 34
Flow rate (l/min)	41,8 x 41,8 x 23,5 x 9,9
Hydraulic tank (l)	41 (tank) / 74 (total)
Slew motor type	Axial piston motor, rigid
Travel motor type	Axial piston motor, variable

AUXILIARY CONTROL CIRCUITS	
1 st control circuit hydraulic breaker (l / min) adjustable flow rate 3 memories for the flow rates	65,3
2 nd /4 th control circuit Powertilt / grab (l / min) adjustable flow rate 1 memory for the flow rate	23,5





01 Robust boom swing assy with specially protected hose guide and hydraulic boom swing; lifting and swing cylinder with end position damping.

02 Sound-damped, low-vibration comfort cab with mechanically cushioned comfort seat.

03 Optimally arranged controls and a clear display with visual and acoustic monitoring units. ECO mode to increase economy and reduce diesel consumption.

05 Generous maintenance hatches for optimum accessibility to hydraulic and fuel maintenance components, battery and radiator.

07 Track rollers with inner and outer guide for safe rubber track running. Double short-pitch rubber tracks for low-vibration driving.




- 08** HUPPTilt tilt device with hydraulic quick change plate HUPPlate H
- 09** HUPPQuick quick coupling system: Hydraulic connections are connected automatically during the quick coupling process
- 10** Hydraulic breaker HUPPBREAK 40
- 11** Universal grabber HUPPGrip 40 with HUPPTilt
- 12** HUPPTilt with HUPPlate H, digging bucket can be mounted as high bucket
- 13** Earth drill - 4500 MAX
- 14** Add-on compactor - Ammann APA20/30
- 15** Wood grapple - Lasco LA1200HZ



More accessories at
[huppenkothen.com/
 excavator-accessories](http://huppenkothen.com/excavator-accessories)


Lifting load (kg) TB240 cabin

Forward (upper dozer blade)

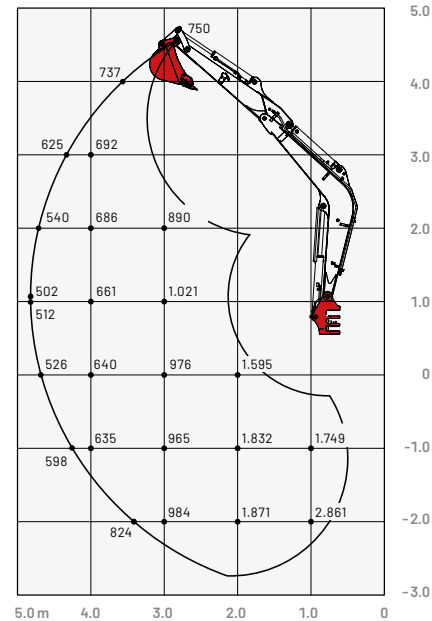

The loads in the diagram are within 87% of the hydraulic lifting load and within 75% of the tipping load.

Dimensions (mm) TB240 cabin

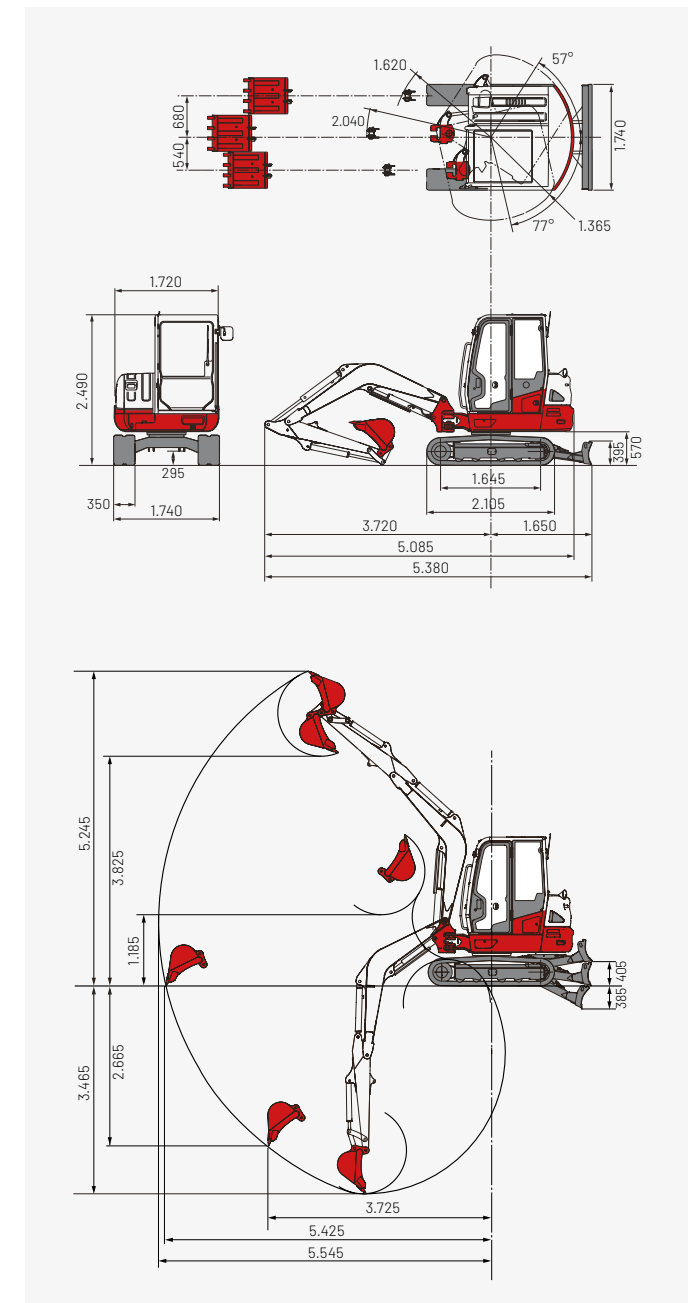

Huppenkothen – your construction site, your partner, your success!

If you're looking to buy or rent a construction machine, if quality is important to you and you have no time to lose, then you've come to the right place with Huppenkothen. We provide all you need for your construction site. If you have any questions:

We are always available.

42

Locations

410

Employees

4.500+

Machines

100 %

Service

AUSTRIA (AT)

/

Huppenkothen GmbH

Bundesstraße 117 / 6923 Lauterach

T +43 50 663 400

info@huppenkothen.com

The complete
Huppenkothen
product range

