TAKEUCHI

TL-Series

Compact track loaders
TL6R / TL8R-2
TL10V-2 / TL12V-2 / TL12R-2



Takeuchi's compact track loaders score with their stability, high payload and manoeuvrability, as they can turn in the smallest of spaces. With your TL, you won't be put off by bad weather or difficult or muddy ground conditions. Thanks to the rubber tracks, our track loaders have low ground pressure and good off-road mobility.






- Auxiliary hydraulic circuit with High Flow
- Air conditioning, heater and radio for optimal driver comfort
- LED worklights for optimum illumination of working area
- Tiltable cabin for easy maintenance and convenient access to the engine
- Depending on model with radial or vertical lift

Sales, service and genuine spare parts –
Takeuchi Serbia is your partner from choosing a machine to servicing.

www.takeuchisrbija.rs

Added-value equipment




Exclusive additional equipment



Powerful



Spacious and comfortable operator cabin



Agile powerhouse

Equipment every operator wants.
TL loaders come with equipment that makes work more efficient, faster and more comfortable.

The exact equipment of the selected model is confirmed in our quotation.

SCOPE OF DELIVERY
Rubber crawlers 400 / 450 mm
Cabin ROPS / FOPS Level I
Air conditioning, heater and radio
Mechanically suspended seat with dead man's switch
Pelvic safety belt
Joystick control
Accelerator pedal in addition to the joystick
Detent Mode - auxiliary line continuous operation
Double air filter
Fully hydrostatic drive
Air breather for hydraulic tank
ECO-Mode, active power control management system
5,7" multifunction colour display
Rear view camera
Travel alarm
Tilt-up operator's station
Sun shield
Rear bumper integrated into the frame
LED work lights front and rear

ADDITIONAL EQUIPMENT
Cruise control – constant driving speed in 20 stages (from 0.15 km/h) for attachments such as asphalt milling machines (TL8R-2 only)
14-pin electrical connection for attachments – joystick-controlled
Hydraulic quick-change device (universal)
Manual parking brake
Equipment availability depends on model and configuration; the exact specification is confirmed in our quotation.

Takeuchi Serbia sales and support

Sales
Quotation and advice on choosing the right model for your work.

/

Service
Service and regular maintenance of Takeuchi machines.


/


Spare parts
Genuine Takeuchi spare parts.

/

Contact
+381 64 00 80 040
info@takeuchi-srbija.com

TECHNICAL DATA	TAKEUCHI TL6R	TAKEUCHI TL8R-2	TAKEUCHI TL10V-2	TAKEUCHI TL12R-2	TAKEUCHI TL12V-2
	Compact track loader with radial lift (approx. 3.530 kg)	**Compact track loader with radial lift (approx. 4.165 kg)**	**Compact track loader with vertical lift (approx. 4.660 kg)**	**Compact track loader with radial lift (approx. 5.710 kg)**	**Compact track loader with vertical lift (approx. 5.985 kg)**
Engine	KUBOTA V2403-CR-TE5B diesel engine 47,9 kW @ 2.700 rpm (ISO 14396) Stage V emission level with DPF and DOC	KUBOTA V3307-CR-TE5B diesel engine 54,6 kW @ 2.600 rpm (ISO 14396) Stage V emission level with DPF and DOC	Kubota V3307-CR-TE5B diesel engine 54,6 kW @ 2.600 rpm (ISO 14396) Stage V emission level with DPF and DOC	Kubota V3800-CR-TIE5B diesel engine 81,8 kW @ 2.400 rpm (ISO 14396) Stage V emission level with DPF, DOC and SCR	Kubota V3800-CR-TIE5B diesel engine 81,8 kW @ 2.400 rpm (ISO 14396) Stage V emission level with DPF, DOC and SCR
Dimensions (mm)	3.330 x 1.680 x 1.975 with loading bucket	3.485 x 1.680 x 2.230 with loading bucket	3.680 x 1.880 x 2.270 with loading bucket	4.045 x 2.000 x 2.330 with loading bucket	4.045 x 2.000 x 2.330 with loading bucket
Travel speed (km/h)	1st gear 7 / 2nd gear 10	1st gear 7,5 / 2nd gear 11,2	1st gear 7,7 / 2nd gear 11,3	1st gear 8,1 / 2nd gear 11,8	1st gear 8,1 / 2nd gear 11,8
Hydraulic service port for attachments	67,4 l/min / 206 bar	High Flow 128 l/min / 210 bar	High Flow 124 l/min / 210 bar	High Flow 153 l/min / 240 bar	High Flow 153 l/min / 240 bar
Turning radius over bucket edge (mm)	2.095	2.190	2.350	2.555	2.505
Max. discharge height (mm)	2.275	2.420	2.435	2.400	2.460
Payload (kg)	835	960	1.145	1.350	1.865
Tipping load (kg)	2.390	2.740	3.270	3.915	5.325
Ground pressure (kg/cm²)	0,348	0,320	0,359	0,327	0,343

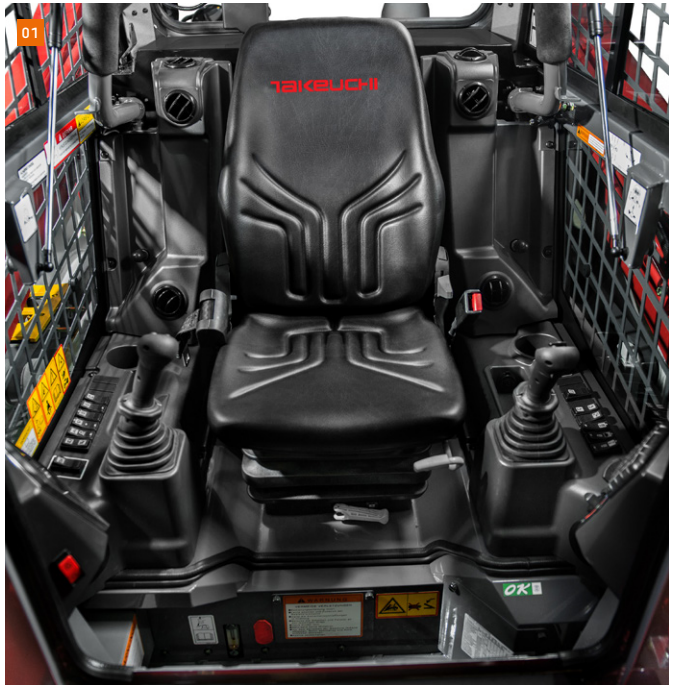

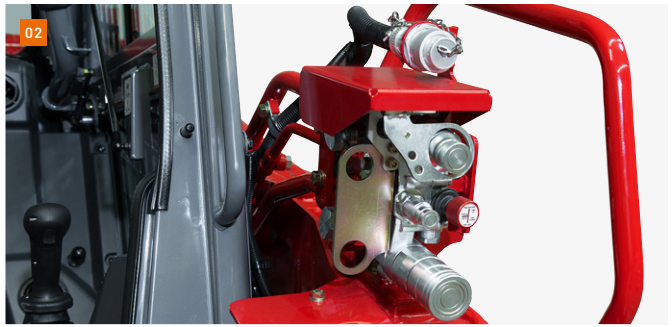





Radial or vertical lift: the differences



Radial lift

- Maximum reach at loading area height
- Ideal for backfilling or dumping over walls
- Highest performance for heavy digging
- Better performance for excavating, digging, levelling and earthworks



Vertical lift

- Greater reach at full lift height
- Higher lifting capacity as the load stays closer to the machine
- Ideal for stacking or loading at height
- Optimum visibility to the left and right thanks to low arm position



05



06



01 The spacious and comfortable cab interior enables productive and fatigue-free work.

02 The auxiliary control circuit with high flow and the 14-pin auxiliary connector allow the machine to be used with a wide range of attachments.


03 Two planetary drives ensure optimum travel speed and provide sufficient power for working with heavy attachments.


04 The tilting cab allows easy access to the engine and main hydraulic components.


05 The hinged rear section guarantees optimal accessibility for radiator cleaning and diesel engine maintenance.


06 Clear multifunction display with rear view camera overlay.

TL6R Dimensions (mm)

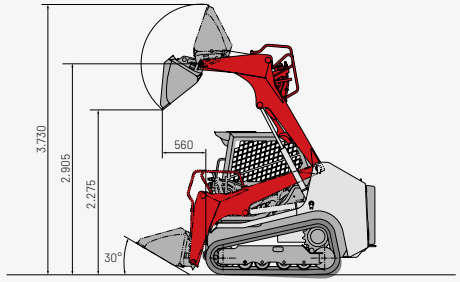


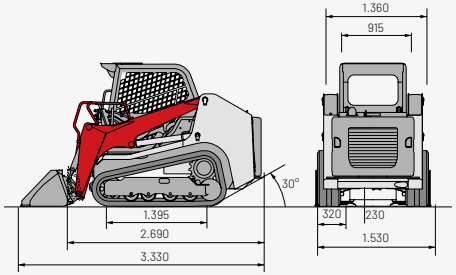


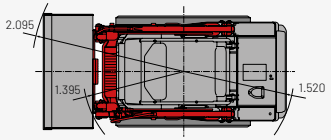





TL8R-2 Dimensions (mm)

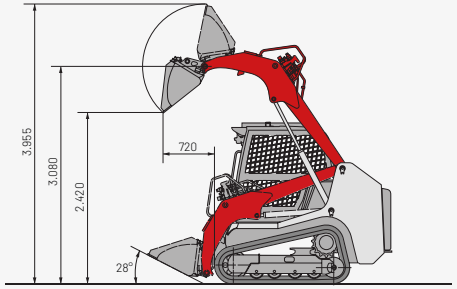


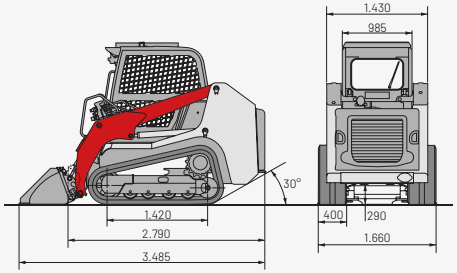








TL10V-2 Dimensions (mm)

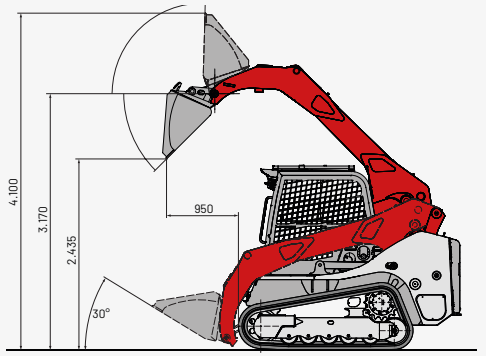


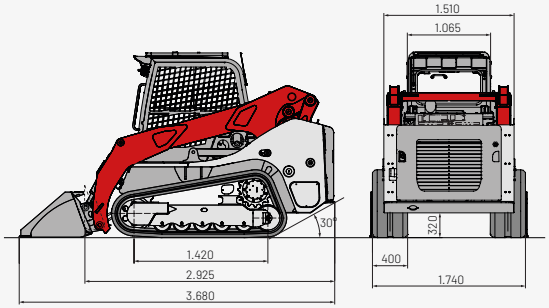

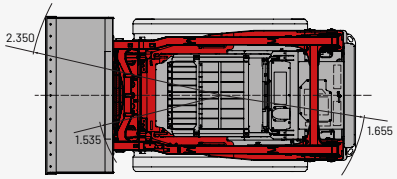




TL12R-2 Dimensions (mm)

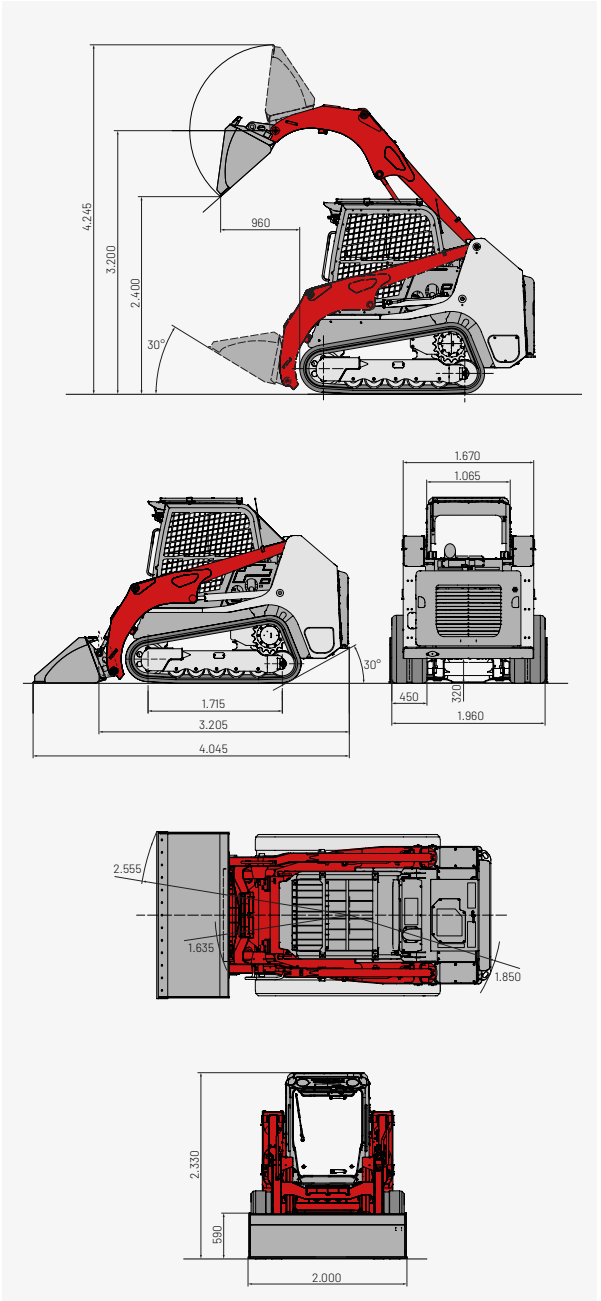

TL12V-2 Dimensions (mm)

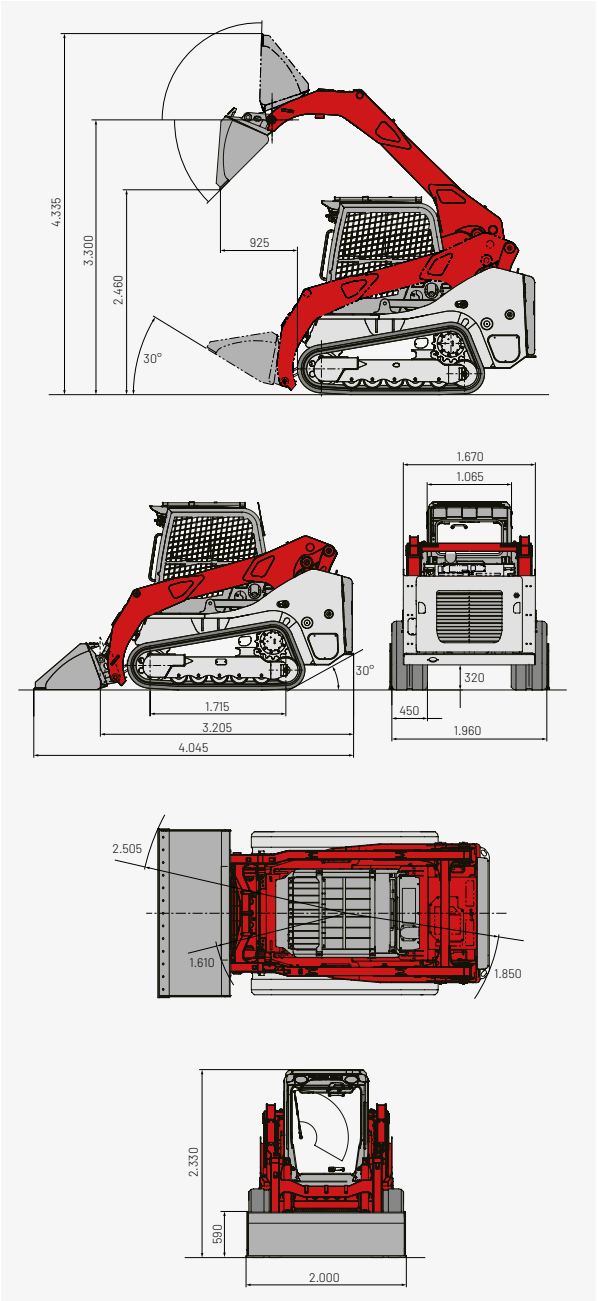





Takeuchi Serbia – sales, service and spare parts for Takeuchi machines

Looking for a reliable compact loader for your construction site? We will help you choose the model that suits your work, prepare a quotation and support you with service and spare parts.

Call us or send an enquiry.

Sales
new Takeuchi machines

Service
and maintenance

Parts
genuine spare parts

Support
in choosing a machine

SERBIA (RS)
/
Takeuchi Srbija
Bački Jarak, Serbia
T +381 64 00 80 040
info@takeuchi-srbija.com / www.takeuchisrbija.rs

All Takeuchi loaders on our website

Errors, technical composition and printing errors reserved, photographs used are in some cases symbolic photos / photography Tobias Köstl Photography / TLs | EN | V1.0_2025.08