

• mills



## Products & Services Catalog



# We are Mills

Your best partner in the rental of Aerial Work Platforms, Heavy equipment and trucks, air Air compressors, generators, and formwork and shoring.

With simple and reliable solutions, we offer the security for you to dream ever higher.

In addition to our coverage, for over 70 years we have been recognized for the quality and excellence of our products, services, and operations, positioning us as a leading company throughout Latin America!

And it is the commitment to the future, ethics, and transparency that consolidates our journey to provide the most delightful experiences to our customers.

Shall we reach even greater dreams together?



# Our Team


We provide specialized and consultative commercial support throughout Brazil, providing customized solutions for each project.

Our technical maintenance teams, instructors, and safety technicians are highly qualified, certified, and committed to efficiency, responsibility, and safety in our daily operations.

We recognize the importance of respecting the uniqueness of individuals in a plural society and strive to promote diversity, equity, and inclusion within our structure, creating a safe and welcoming environment for all.

# We aspire to grow

And drive the development of all individuals impacted by our business

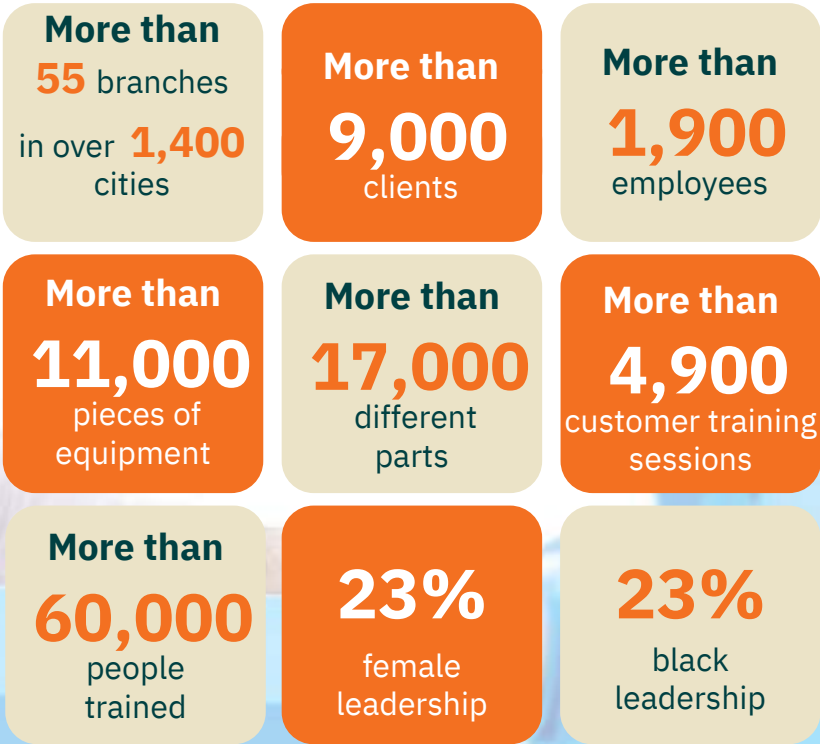


# Sustainability Journey

Sustainability is essential to us! Get to know our 6 material topics focused on the ESG agenda (Environmental, Social, and Corporate Governance):



## Some of our environmental practices:

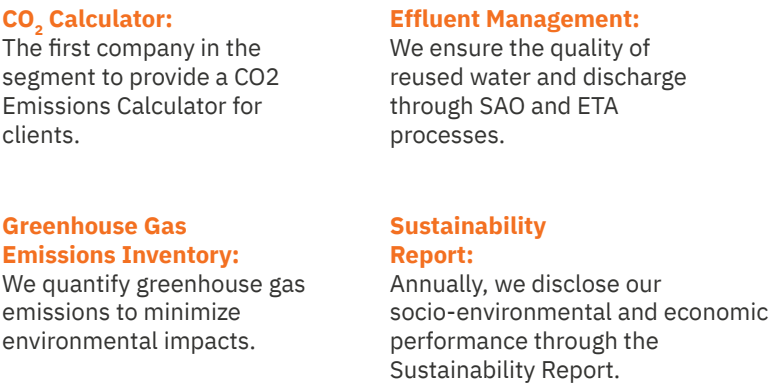

Discover our certifications and corporate initiatives



## Technical Assistance and Maintenance

With over 480 specialized professionals and a complete infrastructure for corrective, preventive maintenance, and technical assistance for our equipment nationwide.

We have dedicated maintenance centers, as well as a fleet of over 200 workshop vans providing national coverage.

We utilize the **Lean Maintenance Method** and **Telemetry System** to ensure safety, efficiency, and equipment availability.

### LEAN Methodology

Standardization of processes, reducing costs, and increasing productivity and machine lifespan.

### Telemetry

Improvement of asset management, enabling cost reduction and service agility.



## Freight

Experience safety and convenience with your transportation managed by Mills.

### More safety

Transportation carried out with suitable vehicles.

### More convenience

Negotiate everything with a single supplier

### More Sustainability

Route optimization for a more sustainable process.

**Enjoy progressive discounts, traceability, cargo security, and much more!**

## Training

We empower instructors and technicians to deliver specialized knowledge to operators, ensuring the safe and effective use of Aerial Work Platforms, promoting productivity, and saving lives.

Mills was the first company to provide IPAF Operator and Demonstrator training in Brazil. With over 40 professionals qualified and certified by manufacturers to conduct standard training sessions.

### Why Choose Mills Training?



We are the only company in the lifting platform rental segment to have Training Centers with national coverage.



IPAF certified as the best Training Center in the world.



We are the only rental company to win 4 IPAF awards in Brazil.



Specialized and dedicated professionals.



## Mills Training

### Operation

They are specialized for each model of lifting platform, so that work at heights can be performed safely and accurately.

#### IPAF Completion Certificate and PAL Card

**Duration:** 8 hours

**Validity:** 2 years

### Loading and Unloading of Platforms (LOAD)

This course instructs an operator or a driver on the correct safety procedures for loading, unloading, and securing platforms.

#### Mills Certificate and Mills Card

**Duration:** 8 hours

**Validity:** 2 years

## IPAF Training

### Operation

It teaches the operator to safely handle Aerial Work Platforms according to the equipment category with international certification.

#### IPAF Completion Certificate and PAL Card

**Duration:** 8 hours

**Validity:** 2 years

### Loading and Unloading of Platforms (LOAD)

This course instructs an operator or a driver on the correct safety procedures for loading, unloading, and securing platforms.

#### IPAF Completion Certificate and PAL Card

**Duration:** 8 hours

**Validity:** 2 years

### Safety Harness Use and Inspection














This course instructs the user on selecting, inspecting, and using a safety harness.

#### IPAF Completion Certificate and PAL Card

**Duration:** 4 hours

**Validity:** 2 years

Just like Mills, Aerial Work Platforms exist to provide safety at heights.

Learn how to find the ideal lifting platform.			
Type of equipment	Scissor	Articulated Boom	Telescopic Boom
What is the working height?	Working height 2m — 18m	Working height 2m — 46m	Working height 2m — 57m
Are there any obstacles at the site?			
Type of reach	 Vertical	 Vertical	 Horizontal
What type of terrain?	 Rough terrain or Firm terrain	or	 Leveled terrain
What type of environment?	 Indoor	or	 Outdoor
Types of power sources	 Electric	or	 Diesel or  Hybrid

Hybrid Platform

Hybrid platforms are adaptable to different terrains and environments, as they operate with both diesel and electric motors.




- Low emission and less noise
- Versatility for working in indoor and outdoor environments up to 20m
- More technology for real-time battery charge monitoring

Get to know more about the models!



- Easy maneuvering in tight spaces;
- Models with spacious decks available;
- Efficient lifting of people and loads.

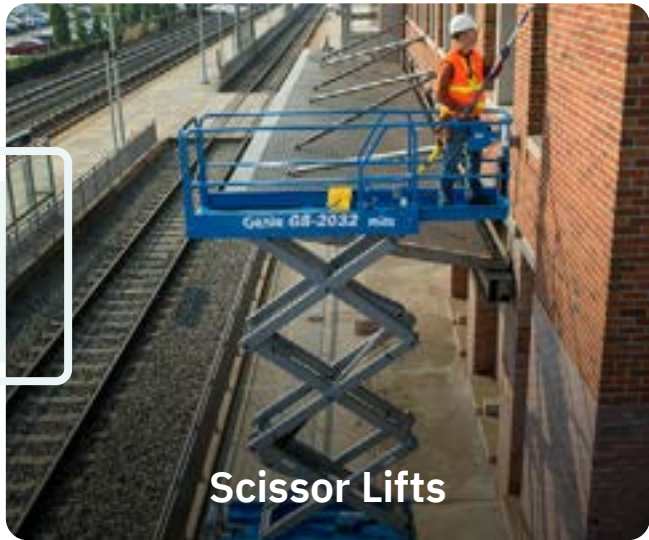

Scissor Lifts



Articulated Boom Lift



- Versatile with easy reach thanks to the boom;
- Navigates around obstacles, machinery, and equipment;
- Unique with negative basket movement.



- High elevation and large load capacity;
- Enhanced mobility due to minimal tail swing;
- Smooth operation and quick boom positioning due to lift and swing proportion.



Telescopic Boom Lift



Personnel Lifts

Personnel Lifts are access equipment designed for use on paved floors, with capacity for a single operator and ideal for indoor environments. They are suitable for slabs with low load capacity and have manual or electric propulsion.

Available for rental and sale through Nest Rental, a Mills Group company.















# Aerial Work Platform

mills

# Aerial Work Platform

mills

Categories	Type of power source and type of terrain	Equipment Description	Working Height (m)	Model	Manufacturer	Family Description	Maximum Horizontal Outreach (m)	Stowed Machine Height (m)	Width (m)	Length (m)	Load Capacity	Maximum Gradient	Gross Weight (kg)	Ground Pressure (kg/cm2)	Tank Capacity (L)	Fuel Consumption (l/h) (min-max)
	 <div>Electric Firm Level</div>	13 ft Electric Scissor Lift	3,9	GS-1330	GENIE	TE013	0,46	0,9	0,78	1,87	227	25%	885	8,40	N/A	N/A
		13 ft Electric Scissor Lift	6,0	JCPT0607DCM	DINGLI	TE013	0,46	1,29m	0,76	1,44	240	25%	920	8,40	N/A	N/A
		19 ft Electric Scissor Lift	7,6	1930ES	JLG	TE019	0,90	2,10	0,81	1,90	227	25%	1.218	7,70	N/A	N/A
		19 ft Electric Scissor Lift	7,6	SJIII 3219	SKYJACK	TE019	0,96	1,99	0,81	1,78	249	23%	1.170	8,00	N/A	N/A
		19 ft Electric Scissor Lift	7,8	GS-1930	GENIE	TE019	0,91	2,00	0,76	1,83	227	25%	1.226	11,6	N/A	N/A
		19 ft Electric Scissor Lift	7,8	6RS	JLG	TE019	0,70	2,02	0,68	1,82	230	25%	1.360	9,2	N/A	N/A
		19 ft Electric Scissor Lift	7,77	Optimum 8	HAULOTTE	TE019	0,86	1,98	0,79	1,9	230	25%	1.520	16,6	N/A	N/A
		20 ft Electric Scissor Lift	7,9	GS-2032	GENIE	TE020	0,91	2,03	0,81	2,44	363	30%	1.621	7,6	N/A	N/A
		20 ft Electric Scissor Lift	7,9	2030ES	JLG	TE020	0,90	2,2	0,80	2,30	363	25%	1.737	5,70	N/A	N/A
		20 ft Electric Scissor Lift	8,0	JCPT0807AC	DINGLI	TE020	0,92	1.84	0,76	1,86	230	23%	1240	19,2	N/A	N/A
		20 ft Electric Scissor Lift	8,1	SJIII 3220	SKYJACK	TE020	0,96	2,10	0,81	2,30	408	25%	1.592	8,5	N/A	N/A
		20 ft Electric Scissor Lift	8,2	Compact 8	HAULOTTE	TE019	0,92	2	0,81	2,49	350	23%	1.655	19,2	N/A	N/A
		26 ft Electric Scissor Lift	9,77	2632ES	JLG	TE026	0,9	2,3	0,81	2,30	360	25%	2.135	6,1	N/A	N/A
		26 ft Electric Scissor Lift	9,75	SJIII 4626	SKYJACK	TE026	0,91	2,15	1,17	2,31	454	25%	2.132	8,0	N/A	N/A
		26 ft Electric Scissor Lift	9,8	2630ES	JLG	TE026	0,90	2,30	0,80	2,30	227	25%	2.184	6,3	N/A	N/A
		26 ft Electric Scissor Lift	9,8	2646ES	JLG	TE026	1,30	2,30	1,20	2,50	454	25%	2.243	6,1	N/A	N/A
		26 ft Electric Scissor Lift	9,9	SJIII 3226	SKYJACK	TE026	0,96	2,30	0,81	2,30	227	25%	1.876	10,00	N/A	N/A
		26 ft Electric Scissor Lift	9,92	GS-2646	GENIE	TE026	0,91	2,26	1,16	2,44	454	30%	1.956	10,0	N/A	N/A
		26 ft Electric Scissor Lift	9,9	GS-2632	GENIE	TE026	0,91	2,26	0,81	2,44	227	25%	2.002	8,1	N/A	N/A
		26 ft Electric Scissor Lift	10,0	JCPT1008AC	DINGLI	TE026	0,92	2,26	0,81	2,48	230/380	23%	2.330	21,2	N/A	N/A
		26 ft Electric Scissor Lift	10,0	Compact 10 N	HAULOTTE	TE026	0,92	2,18	0,81	2,48	230	23%	2.190	16,0	N/A	N/A
		26 ft Electric Scissor Lift	10,15	Compact 10	HAULOTTE	TE026	0,92	2,26	1,2	2,49	450	23%	2.330	21,2	N/A	N/A
		32 ft Electric Scissor Lift	11,6	SJIII 4632	SKYJACK	TE032	1,27	2,24	1,17	2,31	318	25%	2.302	21,2	N/A	N/A
		32 ft Electric Scissor Lift	11,75	10RS	JLG	TE032	0,90	2,43	1,07	2,15	320	25%	2.300	5,7	N/A	N/A
		32 ft Electric Scissor Lift	11,75	GS-3246	GENIE	TE032	0,91	2,39	1,16	2,44	318	25%	2.364	10,5	N/A	N/A
		32 ft Electric Scissor Lift	11,8	3246ES	JLG	TE032	1,30	2,30	1,20	2,50	318/454	25%	2.243	6,1	N/A	N/A
		32 ft Electric Scissor Lift	12,0	JCPT1212AC	DINGLI	TE032	1,27	2,27	1,15	2,48	320	25%	2302	8,6	N/A	N/A
		38 ft Electric Scissor Lift	11.65	SJIII 4732	SKYJACK	TE032	1,22	2,39	1,19	2,32	318	25%	2.492	8,72	N/A	N/A
		40 ft Electric Scissor Lift	12,2	4069LE	JLG	TE040N	0,91	2,81	1,75	3,10	363	35%/45%	4.790	4,3	N/A	N/A
		40 ft Electric Scissor Lift	13,85	Compact 14	HAULOTTE	TE040N	0,92	2,50	1,20	2,49	350	23%	3.175	28,7	N/A	N/A
		40 ft Electric Scissor Lift	14,00	JCPT1412AC	DINGLI	TE040N	0,91	2,62	1,19	2,48	320	25%	3260	12,3	N/A	N/A
		46 ft Electric Scissor Lift	16,00	JCPT1614AC	DINGLI	TE046N	0,91	2,62	1,39	2,84	227	25%	3260	12,3	N/A	N/A
 <div>Rough Uneven</div>		33 ft Diesel Scissor Lift	11,7	3394RT	JLG	TD033	1,22	2,67	2,39	4,00	1020	2WD- 35% 4WD 45%	5.402	3,5	119	4,9 - 6,0
		33 ft Diesel Scissor Lift	12,06	GS-3384 RT	GENIE	TD033	1,52	2,68	2,13	3,94	1134	50%	5.445	9,0	113,6	5,0 - 8,7
		40 ft Diesel Scissor Lift	14	GS-4069 RT	GENIE	TD040	1,39	2,74	1,75	3,12	363	35%	4.681	6,68	38	2,4 - 5,6
		42 ft Diesel Scissor Lift	15,1	H 15 SX	HAULOTTE	TD043	2	2,77	2,25	4,18	500	45%	6.300	12,44	65	1,9 - 3,5
		43 ft Diesel Scissor Lift	14,32	4394RT	JLG	TD043	1,22	2,89	2,39	4,00	680	2WD- 35% 4WD 45%	6.940	3,9	119	4,9 - 6,0
		43 ft Diesel Scissor Lift	15,11	GS-4390 RT	GENIE	TD043	1,52	2,93	2,36	3,98	680	50%	5.849	8,9	86,88	5,0 - 8,7
		50 ft Diesel Scissor Lift	17,07	SJ 9250 RT	SKYJACK	TD050	1,52	3,17	2,34	4,47	454	30%	6.895	9,1	64,35	1,6 - 2,6
		53 ft Diesel Scissor Lift	18,15	GS-5390 RT	GENIE	TD053	1,52	3,15	2,36	4,88	680	40%	7.515	10,4	113,6	5,0 - 8,7
	 <div>Electric Firm Level</div>	30 ft Electric Articulated Boom Lift	10,7	Z-30/20N	GENIE	BE030	6,40	2,08	1,19	5,11	227	2WD 20%	6.427	7,2	N/A	N/A
		34 ft Electric Articulated Boom Lift	12,2	Z-34/22N	GENIE	BE034	6,80	2,00	1,47	5,72	227	2WD 25%	5.171	7,0	N/A	N/A
		34 ft Electric Articulated Boom Lift	12,2	Z-34/22 DC	GENIE	BE034	6,80	2,26	1,73	5,70	227	2WD 30%	5.180	7,2	N/A	N/A
		34 ft Electric Articulated Boom Lift	12	HA 12 IP	HAULOTTE	BE032	6,5	2	1,35	5,4	230	25%	5.900	10,60	N/A	N/A
		45 ft Electric Articulated Boom Lift	15,0	HA 15 IP	HAULOTTE	BE042	8,65	2,10	1,52	6,65	230	25%	7.230	8,8	N/A	N/A
		45 ft Electric Articulated Boom Lift	15,72	E450AJ	JLG	BE045	7,24	2,00	1,75	5,50	227	2WD 30%	6.804	7,60	N/A	N/A
		45 ft Electric Articulated Boom Lift	15,87	Z-45/25 DC	GENIE	BE045	7,50	2,25	1,79	5,56	227	2WD 30%	6.963	7,0	N/A	N/A
		45 ft Electric Articulated Boom Lift	15,94	Z-45/25J DC	GENIE	BE045	7,65	2,25	1,79	2,15	227	2WD 30%	7.394	7,0	N/A	N/A
		60 ft Electric Articulated Boom Lift	20,29	E600J	JLG	BE060	13,11	2,54	2,41	9,37	227	2WD/4WD 30/45%	7.100	4,1	N/A	N/A
		60 ft Electric Articulated Boom Lift	20,4	E600JP	JLG	BE060	13,54	2,54	2,41	10,10	227	2WD/4WD 30/45%	7.150	3,6	N/A	N/A
	 <div>Diesel Rough Uneven</div>	34 ft Diesel Articulated Boom Lift	12,5	Z-34/22 IC	GENIE	BD034	6,80	2,00	1,73	4,08	227	4WD 45%	4.604	3,2	35,2	2,4 - 5,6
		45 ft Diesel Articulated Boom Lift	15,69	Z-45/25J RT	GENIE	BD045	7,70	2,11	2,29	6,83	227	4WD 45%	6.486	9,1	64	4,6 - 9,4
		45 ft Diesel Articulated Boom Lift	15,7	450AJ	JLG	BD045	7,60	2,26	2,35	6,53	227	2WD/4WD 30/45%	6.418	4,57	61	4,6 - 9,4
		45 ft Diesel Articulated Boom Lift	15,72	450AJ SII	JLG	BD045	7,47	2	2,35	6,53	227	4WD 45%	6.146	4,6	64,3	4,6 - 9,4
		45 ft Diesel Articulated Boom Lift	15,74	Z-45/25 RT	GENIE	BD045	7,50	2,11	2,29	5,50	227	2WD/4WD 30/45%	6.203	7,03	64	4,6 - 9,4
		45 ft Diesel Articulated Boom Lift	16,0	HA 16 SPX	HAULOTTE	BD045	8,60	2,20	2,30	6,80	30	40%	6.700	10,1	72	5,0 - 8,7
		52 ft Diesel Articulated Boom Lift	17,3	HA 18 SPX	HAULOTTE	BD052	10,50	2,30	2,30	7,50	230	40%	7.660	10,1	72	5,0 - 8,7
		60 ft Diesel Articulated Boom Lift	20,1	Z-60/34	GENIE	BD060	10,40	2,50	2,70	8,20	227	2WD/4WD 20/35%	10.215	4,2	75,7	4,6 - 9,4
		80 ft Diesel Articulated Boom Lift	26,2	Z-80/60	GENIE	BD080	18,30	3,00	2,49	11,20	227	2WD/4WD 30/50%	16.284	9,1	151	8,9 - 11,6
		80 ft Diesel Articulated Boom Lift	26,46	800AJ	JLG	BD080	15,74	3,00	2,49	11,10	227	2WD/4WD 30/45%	16.103	5,3	147,6	7,19 - 9,46
	<div>Hybrid</div>	80 ft Diesel Articulated Boom Lift	25,6	HA 260 PX	HAULOTTE	BD078	16,2	2,71	2,38	12	230	40%	15.890	13,25	150	5,0-8,7
		125 ft Diesel Articulated Boom Lift	40,1	1250AJP	JLG	BB125A	19,25	3,1	2,49	14,48	454/227	4WD 45%	19.958	7,0	117	5,0 - 8,7
		135 ft Diesel Articulated Boom Lift	42,9	ZX-135/70	GENIE	BB135A	21,26	3,09	2,49	12,90	272	4WD 45%	20.502	5,8	151,4	8,9 - 16,1
		45 ft Hybrid Articulated Boom Lift	20,16	Z-60/37 FE	GENIE	BH040	11,15	8.15	2.49	8.15	227	45%	7.756	8.62	64	N/A
		60 ft Hybrid Articulated Boom Lift	15,92	Z-45/25 FE	GENIE	BH060	6,94	2,11	2.50	6.83	300	45%	6.963	8.62	64	N/A
	<div>Diesel Rough Uneven</div>	80 ft Hybrid Articulated Boom Lift	26,30	BT26BHRT	DINGLI	BH080	19,40	2,87	2.50	10.80	454	30%	16090	5,3	165	N/A
		138 ft Hybrid Articulated Boom Lift	44,44	BT44HRT	DINGLI	BH0138	25,6	2,83	2,44	17,00	454	45%	22300		230	N/A
		105 ft Diesel Telescopic Boom Lift	33,8	S-105	GENIE	BB105	24,40	3,07	2,60	12,20	227	4WD 42%	18.144	7,4	151,0	8,9 - 16,1
		120 ft Diesel Telescopic Boom Lift	38,73	1200SJP	JLG	BB120	22,86	3,05	2,49	13,67	454/227	2WD/4WD 30/45%	18.552	7,0	117,3	8,7 - 15,0
		125 ft Diesel Telescopic Boom Lift	40	S-125	GENIE	BB125T	24,38	3,07	2,60	12,20	227	4WD 40%	20.248	7,40	151,0	8,9 - 16,1
	<div>Diesel Rough Uneven</div>	135 ft Diesel Telescopic Boom Lift	43,2	1350SJP	JLG	BB135T	24,38	3,05	2,49	14,80	454/227	4WD 30/45%	20.411	7,4	117,3	8,7 - 15,0
		180 ft Diesel Telescopic Boom Lift	56,69	SX-180	GENIE	BB180'	24,40	3,05	2,49	16,18	340	35%	24.948	9,1	189,3	8,7 - 15,0

Grow, diversify, and lead

We introduced our presence in the Heavy equipment and trucks in 2022, aiming to enhance our customers' experience to remain their primary equipment rental partner in Brazil.

Our advantages

Complete Fleet:

A variety of models and equipment from leading manufacturers. Original parts.

Premium Equipment:

Top-of-the-line machines.

Comfort, safety, and productivity:

ROPS and FOPS Certification



The new line of heavy machinery features cabins with ROPS and FOPS certification, ensuring the operator's safety against falling objects and rollovers.






























Monitoring System



We utilize a monitoring system that tracks equipment, reducing costs and managing idle time.



Get to know more about our products

Available Models	Where or how to use			Machine Properties
Wheel Loader	 Agricultural sector	 Construction and works	 Material warehouse	Small and medium-sized machines with high performance, designed for soil and product handling activities. <i>In addition to infrastructure and sanitation</i>
Backhoe Loader	 Agricultural sector	 Construction	 Infrastructure	Multifunctional, agile, compact, high-performance and reliable 4x4 backhoe loader. <i>In addition to sanitation</i>
Excavator	 Agricultural sector	 Construction and works	 Demolition	Small and medium-sized equipment, high performance, and low fuel consumption. Available options designed to accommodate various types of implements and accessories. <i>In addition to highway maintenance and sanitation.</i>
Motor Grader	 Soil preparation	 Ground leveling	 Highway construction and maintenance	Articulated motor grader, medium to large size, high performance, equipped with rear ripper. <i>In addition to slope shaping.</i>
Crawler Loaders	 Agricultural and forestry sector	 Production and construction	 Highway construction and maintenance	Guaranteed performance and productivity for the operation. Model with ripper, equipped with SU-type blade <i>In addition to infrastructure, earthworks, and quarries.</i>
Skid Steer	 Port area	 Construction and works	 Highway construction and maintenance	Ideal for work in limited access locations. Compact model for smaller-scale tasks. <i>In addition to fertilizers.</i>
Mini Excavator	 Agricultural sector	 Construction and works	 Landscaping	Ideal for work in limited access locations. Compact model for smaller-scale tasks. <i>In addition to basic sanitation and contractors.</i>
Compactor	 Soil compaction	 Construction and works	 Highway construction and maintenance	Medium-sized smooth vibratory model, with sheep's foot KIT. <i>In addition to infrastructure</i>
Truck Various models	 Bulk cargo transportation	 Washing of runways and flowerbeds	 Relocation of sugarcane bagasse	Dump trucks, convoys, and water trucks that play fundamental roles, contributing to efficient operations in various sectors. Various models available.
Tractor	 Agricultural sector	 Construction and works		Highly reliable small and medium-sized models.







## Complete engineering solution

From equipment rental to planning and project management of all sizes, we offer higher quality, safety, and efficiency for your construction projects!

### Product Category



Forms



Shoring



Access



Special Systems



## Sectors



Road



Ports



Railways




Airports



Industries



Energy



Events



Building

## Our Advantages

Technical  
Expertise

Technology and  
Equipment

Differentiated  
Engineering

Safety and  
Productivity

### We are always present

5

logistics centers  
various regions

More than

489.000

projects  
executed

More than

1.400

cities national  
coverage

More than

13.900

completed  
projects

More than

12.500

assembly  
instructions

m

- Bahia
- Distrito Federal
- Rio de Janeiro
- São Paulo
- Rio Grande do Sul





Categories	Type	Equipment Description			Thickness	Height	Width	Pressure	Weight	Productivity
 <div>Formwork</div>	SL2000	Lightweight system of steel panels coated with plastic coated plywood.			10 cm	75 cm a 150 cm	20, 25, 30, 40, 50, 60, 70, 75 e 80 cm	Up to 40 kN/m²	34 kg/m²	0,37 Hh/m²
	Alu-L	Lightweight system of aluminum panels coated with plastic coated plywood.			10 cm	150 cm a 275 cm	30, 80 e 90 cm	Up to 60 kN/m²	20 kg/m²	0,25 Hh/m²
	TOP Mills	Heavy-duty system of steel panels coated with plastic coated plywood.			12 cm	132 cm a 265 cm	25 cm a 265 cm	Up to 80 kN/m²	60 kg/m²	0,22 Hh/m²
	Painel Aluma	Panel with aluminum beam structure customized to meet the necessary pressures.			Approx. 35 cm	Custom-built	Custom-built	Up to 250 kN/m²	Approx. 40 kg/m²	Average 0,30 Hh/m²
	Climbing Formwork	System for vertical structures, designed for reuse and successive anchoring in progressive phases of concreting.			Compatible with the Panel System used.	Concrete pouring stages of up to 488 cm.	Compatible with the panel system used.	Compatible with the panel system used.	Average 50 kg/m²	Average 0,35 Hh/m²
	Climbing Formwork	System for vertical structures structured in SM with hydraulic movement.			Compatible with the panel system used.	Concrete pouring stages of up to 488 cm.	Compatible with the panel system used.	Compatible with the panel system used.	Average 100 kg/m²	Average 0,35 Hh/m²
 <div>Shoring</div>	Type	Equipment Description		Width	Length	Height	Load Capacity	Weight	Productivity	Base Voltage
	Millstour	Modular snap-fit tower system for heavy construction.		100 cm, 160 cm, 210 cm and 240 cm	100 cm, 160 cm, 210 cm and 240 cm	Modulation 120 cm	6 ton	9 kg/m³	Assembly : 70 kg/Hh Disassembly: 140 kg/Hh	30 kgf/cm²
	Alumills	Modular high-capacity aluminum tower system.		42 cm to 240 cm	42 cm to 240 cm	150 cm to 600 cm	14 ton	5 kg/m³	Assembly : 100 kg/Hh Disassembly: 200 kg/Hh	50 kgf/cm²
	Elite	Quick-attach multidirectional tower system for light construction.		105 cm, 180 cm, 210 cm and 240 cm	105 cm, 180 cm, 210 cm and 240 cm	50 cm to 300 cm	3,5 ton	7,5kg/m³	Assembly : 60 kg/Hh Disassembly: 120 kg/Hh	16 kgf/cm²
	Deck Light	Formwork system for slabs up to 25 cm thick. Composed of modular aluminum panels supported by props.		60 cm to 90 cm	100 cm to 200 cm	Up to 450 cm	2 ton/prop	15 kg/m²	Assembly : 0,30 Hh/m²	10 kgf/cm²
	Deck Mills	Formwork system for slabs up to 50 cm thick. Composed of modular aluminum panels supported by props.		45 cm to 90 cm	90 cm to 150 cm	Up to 450 cm	2 tton/prop	15 kg/m²	Assembly : 0,30 Hh/m²	10 kgf/cm²
 <div>Access</div>	Elite	Multidirectional quick-attach tower system for light construction.		105 cm, 180 cm, 210 cm and 240 cm	105 cm, 180 cm, 210 cm and 240 cm	50 cm to 300 cm	3,5 ton	7,5 kg/m³	Assembly : 60 kg/Hh Disassembly: 120 kg/Hh	16 kgf/cm²
	Millslock	Quick-attach multidirectional tower system for light construction.		105 cm, 180 cm, 210 cm and 240 cm	105 cm, 180 cm, 210 cm and 240 cm	50 cm to 300 cm	3,5 ton	7,5 kg/m³	Assembly : 60 kg/Hh Disassembly: 120 kg/Hh	16 kgf/cm²
	Step Ladder	Modular staircase with detachable steps.		200 cm	330 cm	48 m	300 kgf/m²	230 kg/m of height	Assembly : 1 Hh/m de altura Disassembly: 0,5 Hh/m de altura	16 kgf/cm²
	Mat Climbers	Rack and pinion system that allows access to height for facade work or various constructions.		Platform from 82 cm to 282 cm.	Up to 32 m	Up to 150 m	Até 4 ton	Mast: 33 kg/m Platform: 18 kg/m	Rise/Descent Speed: 7.5 m/minute Assembly: 640 m², Disassembly: 1,000 m²	17 kgf/cm²
 <div>Special Equipment</div>	Type	Equipment Description			Capacity	Dimensões		Weight	Productivity	
	Metallic profile	W310 and W530 profiles			18 tf.m to 60 tf.m	3.0 m to 12.0 m		52 kg/m to 109 kg/m		
	Cross Truss M-150	Modular flat truss made of high-strength steel capable of supporting heavy loads and spanning large spans. It can work both between supports and in cantilever.			Bending Moment: up to 150 tf.m/beam Spans: up to 38 m	Height: 214 cm Modules: 30 cm, 170 cm, 300 cm, 450 cm, and 600 cm		130 kg/m	Assembly: 1 m of truss/hour Disassembly: 2 m of truss/hour	
	Overhad Form travell	Successive cantilever carriage composed of steel truss used in bridge and viaduct constructions. Ideal for situations where the construction methodology does not allow the support of shoring directly on the ground or when there is a need for the execution of large spans or works without the closure of urban roads.			Width of the girder: up to 30 m - Length of the girder: up to 7.0 m - Weight of the girder: up to 500 tons	Height: 2.40 m - Modules: 1.50 m, 3.00 m, 6.00 m, and 10.80 m		On average 40 tons/car	Assembly: 6 days/car Movement: 0.5 days/advance Disassembly: 3 days/car	
	Launcher Gantry	Used in bridge and viaduct construction to meet the demands of the successive cantilever method with lifting of precast arches. It has a hydraulic system for leveling and adjusting the arch and electric winches equipped with a safety braking system.			Weight of the barrel: up to 120 tons.	Lifting height: up to 50 m		40 tons/car	Lifting speed: 1.5 m/min Assembly: 6 days/car Movement: 0.5 days/advance Disassembly: 3 days/car	
	Beam Launchers	Motorized equipment designed for launching precast beams. It performs all stages of launching operation, from lifting the beam to its positioning on the supports.			Weight of the girder: up to 120 tons - Maximum beam weight: 140 tons - Beam width: up to 3.65 m - Spans: up to 45 m - Maximum slope: 6%	Height: 2.85 m Length: up to 100 m		120 tons/launching gantry	Up to 6 beams/day Assembly: 15 days Disassembly: 10 days	
	SM	Modular steel system with high load capacity, adjustable to configure complex geometries. Capable of serving a wide range of structure categories such as galleries, tunnels, bridges, and viaducts.			Maximum load per piece: 34 tons	Lengths: 1.00 m to 2.81 m		25 kg/m	Assembly: 50 kg/Hh Disassembly: 100 kg/Hh	



Portable Diesel Equipment

Model	Flow rate (cfm)	Pressure (bar)	Length (m)	Width (m)	Height (m)	Weight (kg)
185 Q	185	7	3,33	1,50	1,37	966
260 Q	260	7	3,64	1,66	1,52	1.288
375 Q	375	7	3,85	1,96	1,93	2.005
375 QH	300	10	3,85	1,96	1,93	2.005
375 QHT	375	10	3,85	1,96	1,93	2.005
425 DTQ	425	7	3,85	1,96	1,93	2.005
750 Q	750	7	4,86	2,21	2,30	4.559
750 QH	750	10	4,86	2,21	2,30	4.559
900 Q	900	7	4,86	2,21	2,30	4.559
750 HH	750	12	4,86	2,21	2,30	4.559
900 QH	900	10	4,86	2,21	2,30	4.559
900 HAF	900	10	4,86	2,21	2,30	4.808
750 XHH / 900 XH	750/900	35 / 24	6,10	2,24	2,36	7.276
900 XHH / 1150 XH	900/1150	35 / 24	6,10	2,24	2,36	7.276
1000 XH / 1200 HHH	1000/1200	24 / 16	6,10	2,24	2,36	7.276
1200 HAF	1200	10	6,10	2,24	2,36	7.539
1300 QH	1300	10	6,10	2,24	2,36	7.235
1450 HH	1450	14	6,10	2,24	2,36	7.416
1450 HHAF	1450	14	6,10	2,24	2,36	7.539
1600 Q	1600	7	6,10	2,24	2,36	7.375
1600 QH	1600	10	6,10	2,24	2,36	7.410
1600 HAF	1600	10	6,10	2,24	2,36	7.539

Stationary Electric Equipment

Model	Flow rate (cfm)	Pressure (bar)	Length (m)	Width (m)	Height (m)	Weight (kg)	Power (kW)
S-energy 3009	163	9	1,30	0,80	1,35	732	30
S-energy 3707	250	7	1,56	0,88	1,56	926	46
LS 10-30 L	122	7	1,53	0,92	1,07	460	22
LS 10-40 H	160	8	1,53	0,92	1,07	520	30
LS 10-50 L	235	7	1,83	1,22	1,53	1.050	37
LS 12-60 L	265	7	1,83	1,22	1,53	1.292	45
LS 16-75 L	370	7	1,83	1,22	1,59	1.442	55
LS 16-100 HH	380	10	2,54	1,53	1,75	1.510	75
LS 20-125 L	630	7	2,54	1,53	1,75	2.424	93
LS 20-150 L	750	7	2,54	1,60	1,75	2.700	110
LS 20-175HH	650	10	2,54	1,52	1,84	3.790	130
LS 20-175 L	825	7	2,54	1,53	1,75	2.790	130
LS 20-220 HH	750	10	2,54	1,52	1,84	2.900	160
LS 20-220 L	965	7	2,54	1,52	1,84	2.900	160
LS 25-200 L	1000	7	3,05	2,22	2,23	3.566	150



Variety

Air compressor rental and equipment that me-ets specific needs in infrastructure, industry, shipyards, and mining, with a wide range of flow rates and operating pressures.



Reliability

Our portable air compressors are the best alternative when you need to rent quality equipment. Our reliability is due to the state-of-the-art technology of our equipment.



Simplicity

The compressor can be easily towed or transported from one location to another, reducing transportation costs within the work site, in addition to the operational simplicity of its controls and accessories, as well as the handling of our equipment with total safety.



Safety

When renting our air compressors, you acquire the reliability of our technical assistance, essential for the equipment to operate fully and uninterruptedly. Our technical team is trained to offer quick and efficient solutions to any inconveniences that may prevent the normal operation of the compressor.





Complete solutions for power supply with generators for:



Industry



Construction



Commerce



Events



Key Advantages

Our equipment is modern and equipped with an electronic protection system to ensure constant power supply at the contracted voltage. All generators are enclosed, allowing safe installation for people and animals.



Operational Performance

We are present in the main companies seeking electrical power solutions. We are recognized for our quality, structure, and reliability.



Generation Engineering

Specialized technical support, dedicated service (depending on the contract), parallel operation of generators to increase power generation, maintenance, installation, and supply of generators to work during peak hours (seasonal hours).



Various accessory options

We offer a wide range of accessories for our power generators such as: automatic transfer switch panel - ATS, distribution boards, 120mm2 cables, sockets panel, and external fuel tanks.

Equipment

Power KV	Power Kw	Autonomy with 75% load	Tank capacity	Dimensions (m)			Weight	Voltage
		(Hours)	(Liters)	(Length)	(Width)	(Height)	(Kg)	(V)
81	65	14	240	2,74	1,1	1,89	1620	220 a 480
140	112	12	348	3,16	1,1	1,93	2350	220 a 480
170	136	10	348	3,16	1,1	1,93	2400	220 a 480
212	170	10	467	3,9	1,42	2,35	3000	220 a 480
260	208	10	536	3,92	1,36	2,53	3100	220 a 480
360	288	16	1.100	5,11	1,56	2,59	6300	220 a 480
375	300	9	640	4,27	1,42	2,41	6300	220 a 480
450	360	13	1.100	5,11	1,56	2,59	6500	220 a 480
500	400	11	1.100	5,11	1,56	2,59	6500	220 a 480
625	500	11	1.100	5,11	1,56	2,59	6900	220 a 480
1.250	1.000	9	1.700	6,06	2,5	2,75	15400	380 a 480



# Solutions that make our customers' daily lives easier

- Scissor lifts
- Articulated lifts
- Telescopic lifts
- Personnel Lifts
- Wheel Loader
- Backhoe Loader
- Excavator
- Motor Grader
- Track Loader
- Skid Steer
- Mini Excavator
- Compactor
- Dump Truck
- Water Truck
- Formwork
- Shoring
- Access
- Special Systems
- Air Air compressors
- Generators



## Follow us!

 [www.mills.com.br](http://www.mills.com.br)

 [@millsoficial](https://www.instagram.com/millsoficial)

 [@millsoficial](https://www.facebook.com/millsoficial)

 [@canalmills](https://www.youtube.com/canal mills)

 [/millsoficial](https://www.linkedin.com/company/millsoficial)

 [cliente.mills.com.br](mailto:cliente.mills.com.br)

Explore  
our  
solutions!





# mills

**0800 705 1000**

[www.mills.com.br](http://www.mills.com.br)