

S5003-D




Type:

Sloop- en sorteergrijper


Demolition and sorting grab

Abbruch- und Sortiergreifer


Grappin de Demolition et de triage

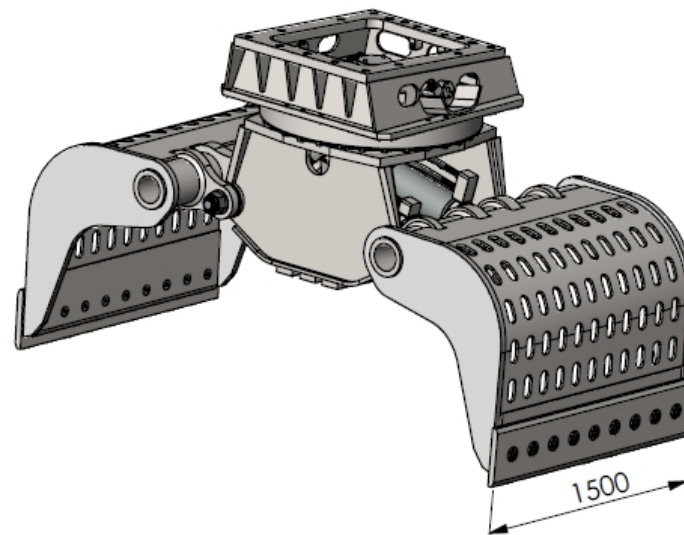


zijkant/side view/
Seitenansicht/vue de côté

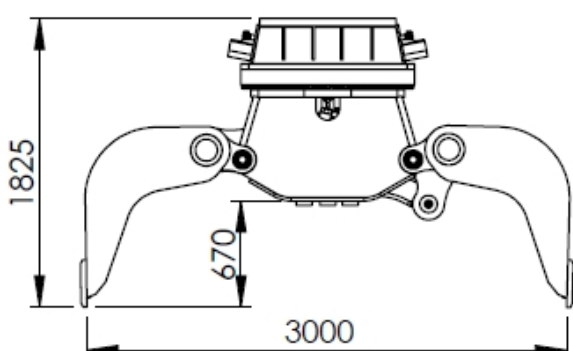

vooraanzicht/front view/
Vorderansicht/vue de face

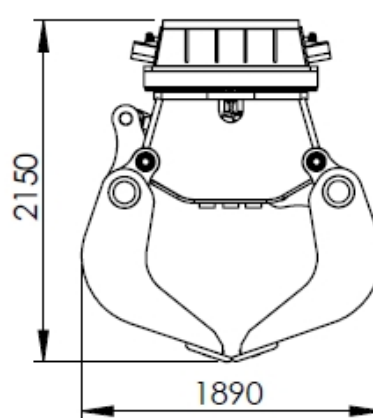

Gatenpatroon/hole pattern/
Bohrbild/motif de trous

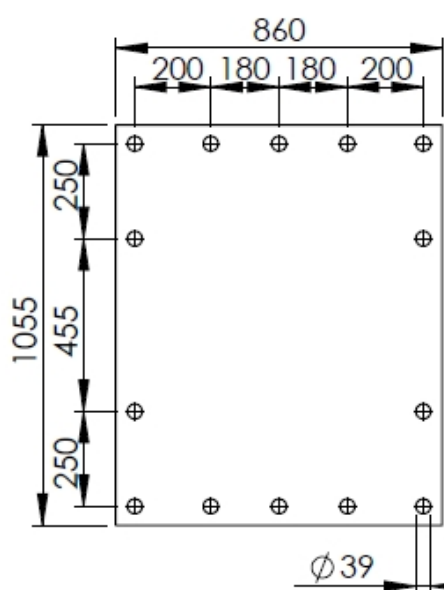

TECHNICAL SPECIFICATIONS

Nederlands

English

Deutsch

Français

Klasse graafmachine	Class excavator	Machine klasse	Classe de excavatrice	t	45-100
Gewicht	Weight	Gewicht	Poids	Kg	5000
Werkdruk max.	Op. pressure max	Betät. druck max	Pression maximale	bar	350
Werkdruk rotatie min.	Op. pressure rotation min	Betät. druck rotation min	Pression rotation min	bar	190
Werkdruk rotatie max	Op. pressure rotation max	Betät. druck rotation max	Pression rotation max	bar	250
Olieflow max	Oil flow max	Ölfluss max	Débit d'huile max	l/min	300
Olieflow rotatie max	Oil flow rotation max	Ölfluss rotation max	Débit d'huile rotation max	l/min	60
Inhoud	Capacity	Inhalt	Contenance	ltr	1600
Sluitkracht	Closing force	Schliesskraft	Force de fermeture	kN	130
Slangaansluiting knijpfunctie	Hose connect open/close	Schlauchanschluss kneifen	Raccord de tuyau fermeture	-	SAE
Slangaansluiting draaifunctie	Hose connect turn function	Schlauchanschluss drehen	Raccord de tuyau rotation	-	S20