


S8000-D




Type:


Sloop- en sorteergrijper
 Demolition and sorting grab
 Abbruch- und Sortiergreifer
 Grappin de Demolition et de triage

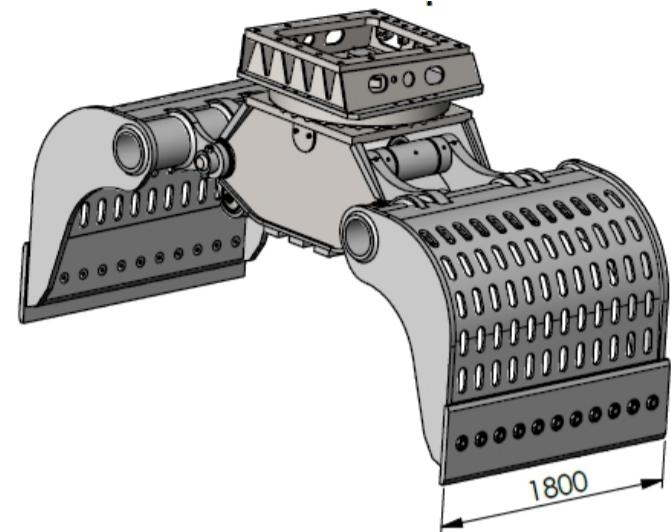


**geopend/opened/
geöffnet/ouverte**

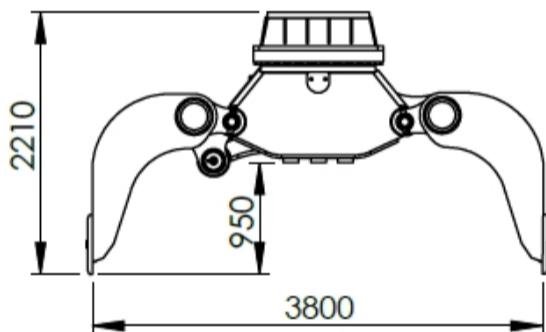

**gesloten/closed/
geschlossen/fermé**

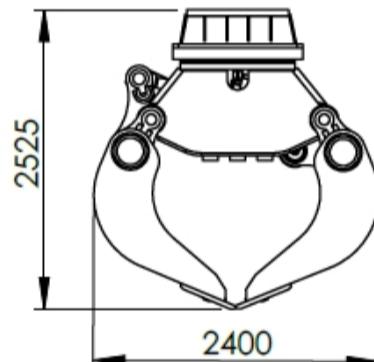

**Gatenpatroon/hole pattern/
Bohrbild/motif de trous**

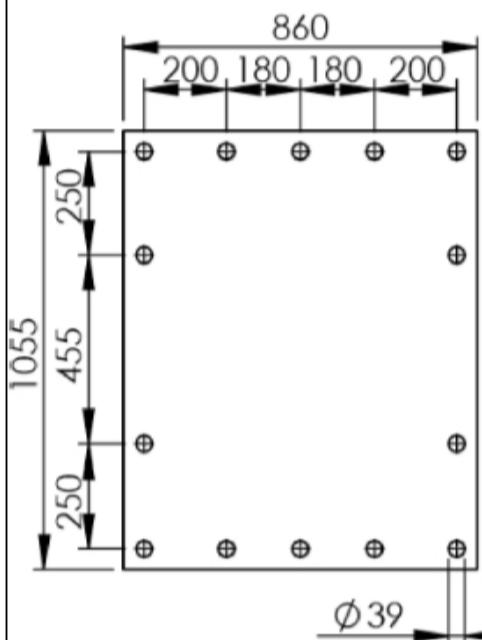

TECHNICAL SPECIFICATIONS

Nederlands	English	Deutsch	Français	t	70-120
Klasse graafmachine	Class excavator	Machine klasse	Classe de excavatrice	t	70-120
Gewicht	Weight	Gewicht	Poids	Kg	7250
Werkdruk max.	Op. pressure max	Betät. druck max	Pression maximale	bar	350
Werkdruk rotatie min.	Op. pressure rotation min	Betät. druck rotation min	Pression ratation min	bar	190
Werkdruk rotatie max	Op. pressure rotation max	Betät. druck rotation max	Pression rotation max	bar	250
Olieflow max	Oil flow max	Ölfluss max	Débit d'huile max	l/min	320
Olieflow rotatie max	Oil flow rotation max	Ölfluss rotation max	Débit d'huile rotation max	l/min	70
Inhoud	Capacity	Inhalt	Contenance	ltr	3600
Sluitkracht	Closing force	Schliesskraft	Force de fermeture	kN	150
Slangaansluiting knijpfunctie	Hose connect open/close	Schlauchanschluss kneifen	Raccord de tuyau fermeture	-	SAE
Slangaansluiting draaifunctie	Hose connect turn function	Schlauchanschluss drehen	Raccord de tuyau rotation	-	S25