

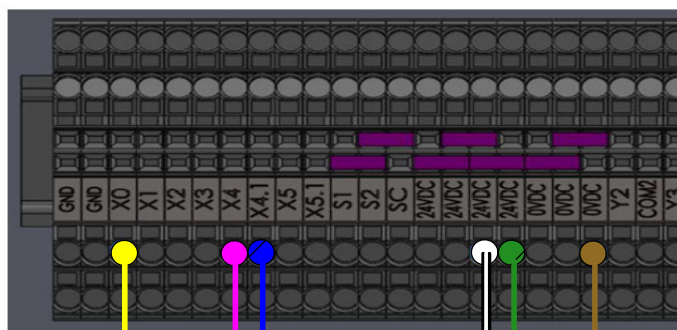
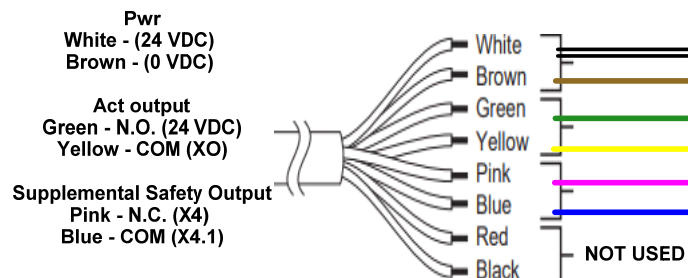


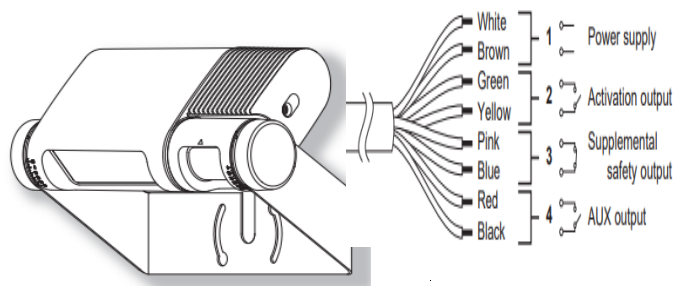

Single OAM Explorer Application


Dual OAM Explorer Application (Interior & Exterior)

NOTE:
On Dual Applications
Remove factory Jumper
between X4.1 and 24 VDC.

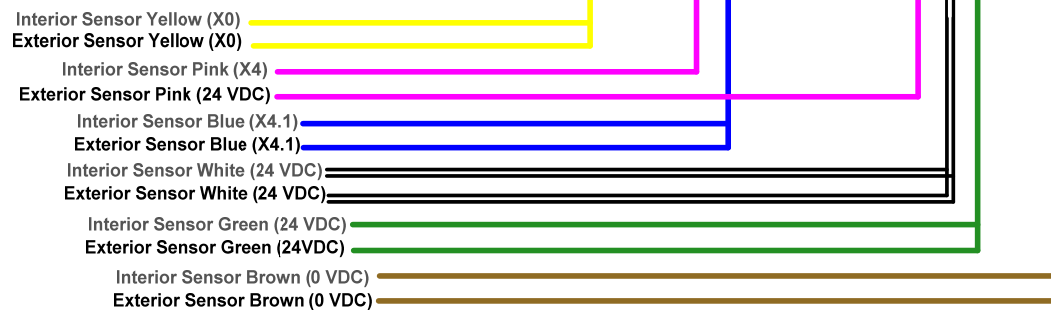

INSTALLATION NOTES

1. Program OAM Explorer:
 - Activate relay output to N.O.
 - Supplemental Safety relay output N.C.
2. Presence is ignored at the closed door position.

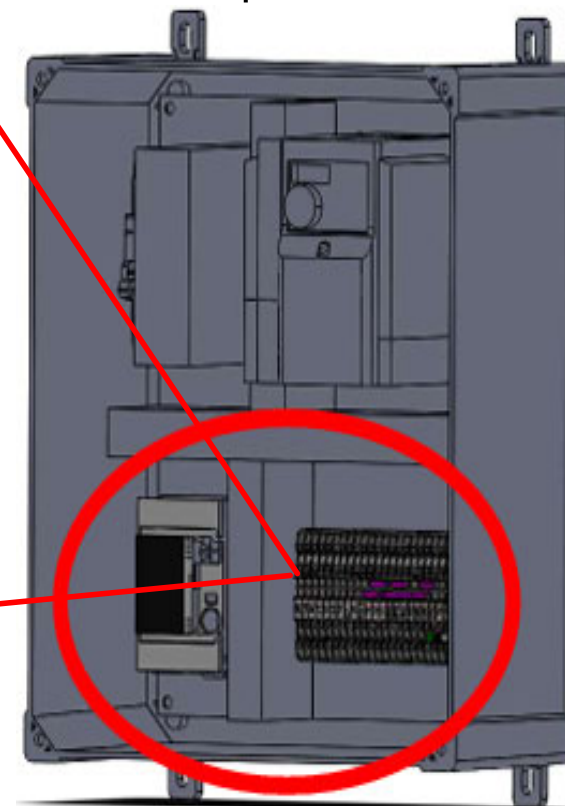

Title: GOFF"S Enterprises With OAM Explorer		Drawing # 01GOFFLCEXP01	
Drawing By: JAS	Date: 03/21/24	Sheet: 1 of 1	
Optex Technologies Inc. 10741 Walker Street., Suite 300,Cypress, CA 90630 Office: (800)877-6656, Fax: (310)214-8644			