


Pwr
White - 24 VAC (14)
Brown - Com (11)

Act output
Green - Open (7)
Yellow - Com (4)


Supplemental Safety Output
Pink - Edge (8)
Blue - Com (4)

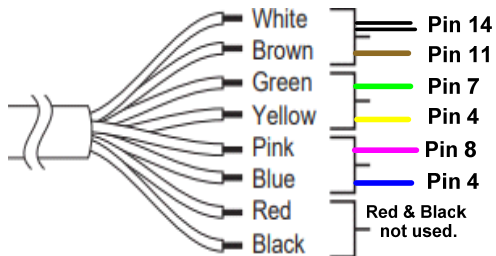

Pwr
White - 24 VAC (14)
Brown - Com (11)

Act output
Green - Open (7)
Yellow - Com (4)

Supplemental Safety Output
Pink - Edge (8)
Blue - Com (4)

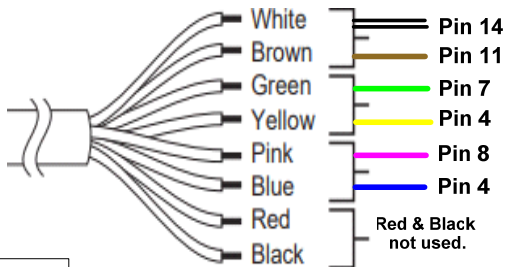

Dual Sensors


Both sensors connect to same location.

Single Sensor

Pwr
White - 24 VAC (14)
Brown - Com (11)



Act output
Green - Open (7)
Yellow - Com (4)

Supplemental Safety Output
Pink - Edge (8)
Blue - Com (4)

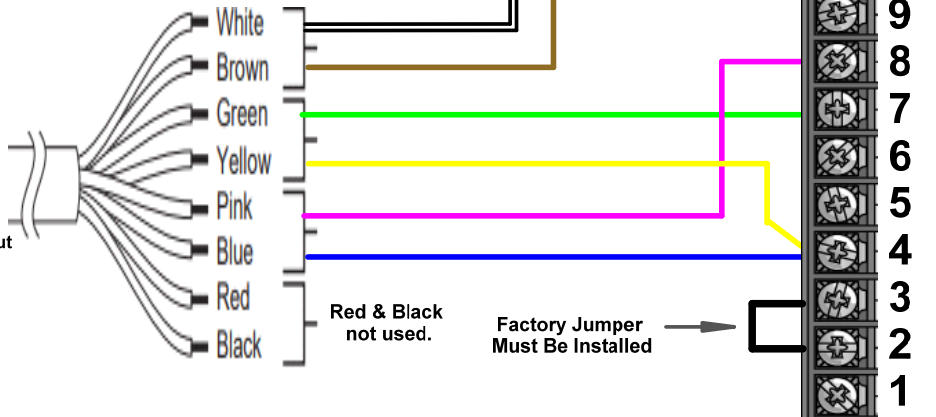

INSTALLATION NOTE:
On OAM Explorer ensure
Supplement Safety Output
is set to N.O..

OAM Explorer

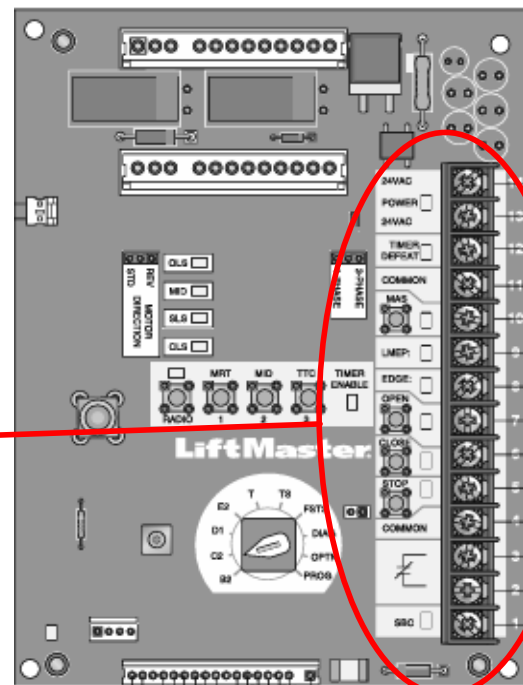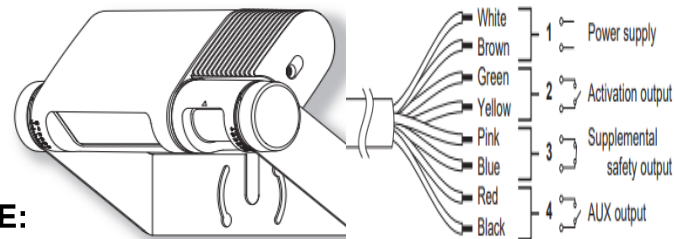

Title: LiftMaster Logic 5.0 with OAM Explorer		Drawing # 01LIFL50EXP01 Rev 1
Drawing By: JAS	Date: 03-06-25	Sheet: 1 of 1
Optex Technologies Inc. 10741 Walker Street., Suite 300, Cypress, CA 90630 Office: (800)877-6656, Fax: (310)214-8644		