


INSTALLATION NOTES:

1. Set Door Speeds and verify door operation prior to final connection of sensors.
2. Stanley Control TB1 pins 6 & 8 must be connected to the breakout status switch or jumpered together.
3. Stanley Control switch S-1 is set to L for Low Energy Magicforce singles. Set to H for all Magicswings and all Magicforce pairs.
4. Technician **MUST WALK TEST** to verify function and detection patterns comply with the applicable Standard. (ANSI/BHMA A156.10 or A156.19)

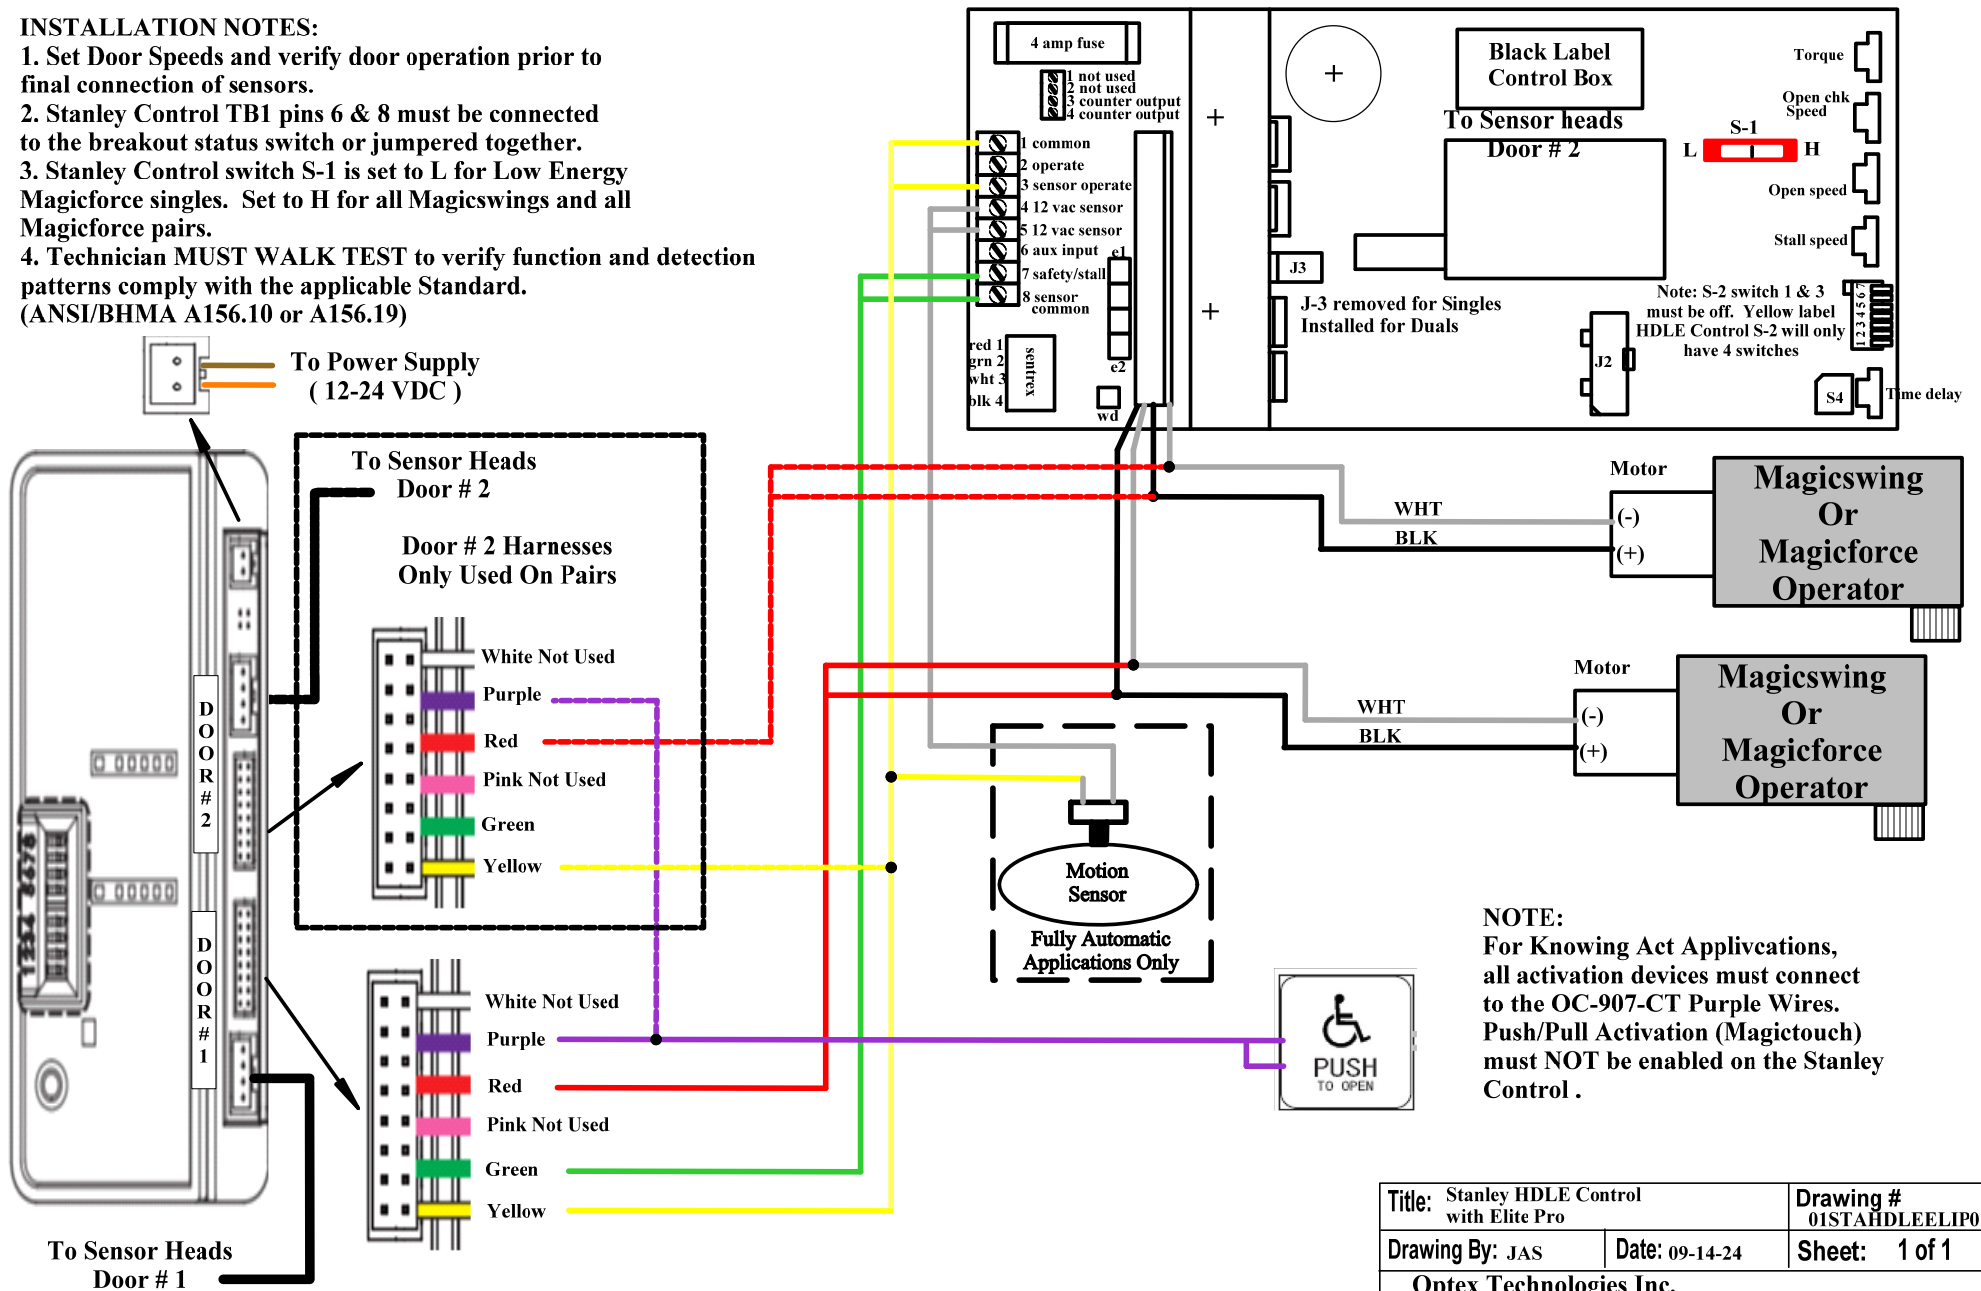

Title: Stanley HDLE Control with Elite Pro		Drawing # 01STAHDEELIP01
Drawing By: JAS	Date: 09-14-24	Sheet: 1 of 1
Optex Technologies Inc. 10741 Walker St., Suite 300, Cypress, CA 90630 Office: (800)877-6656, Fax: (310)214-8644		