


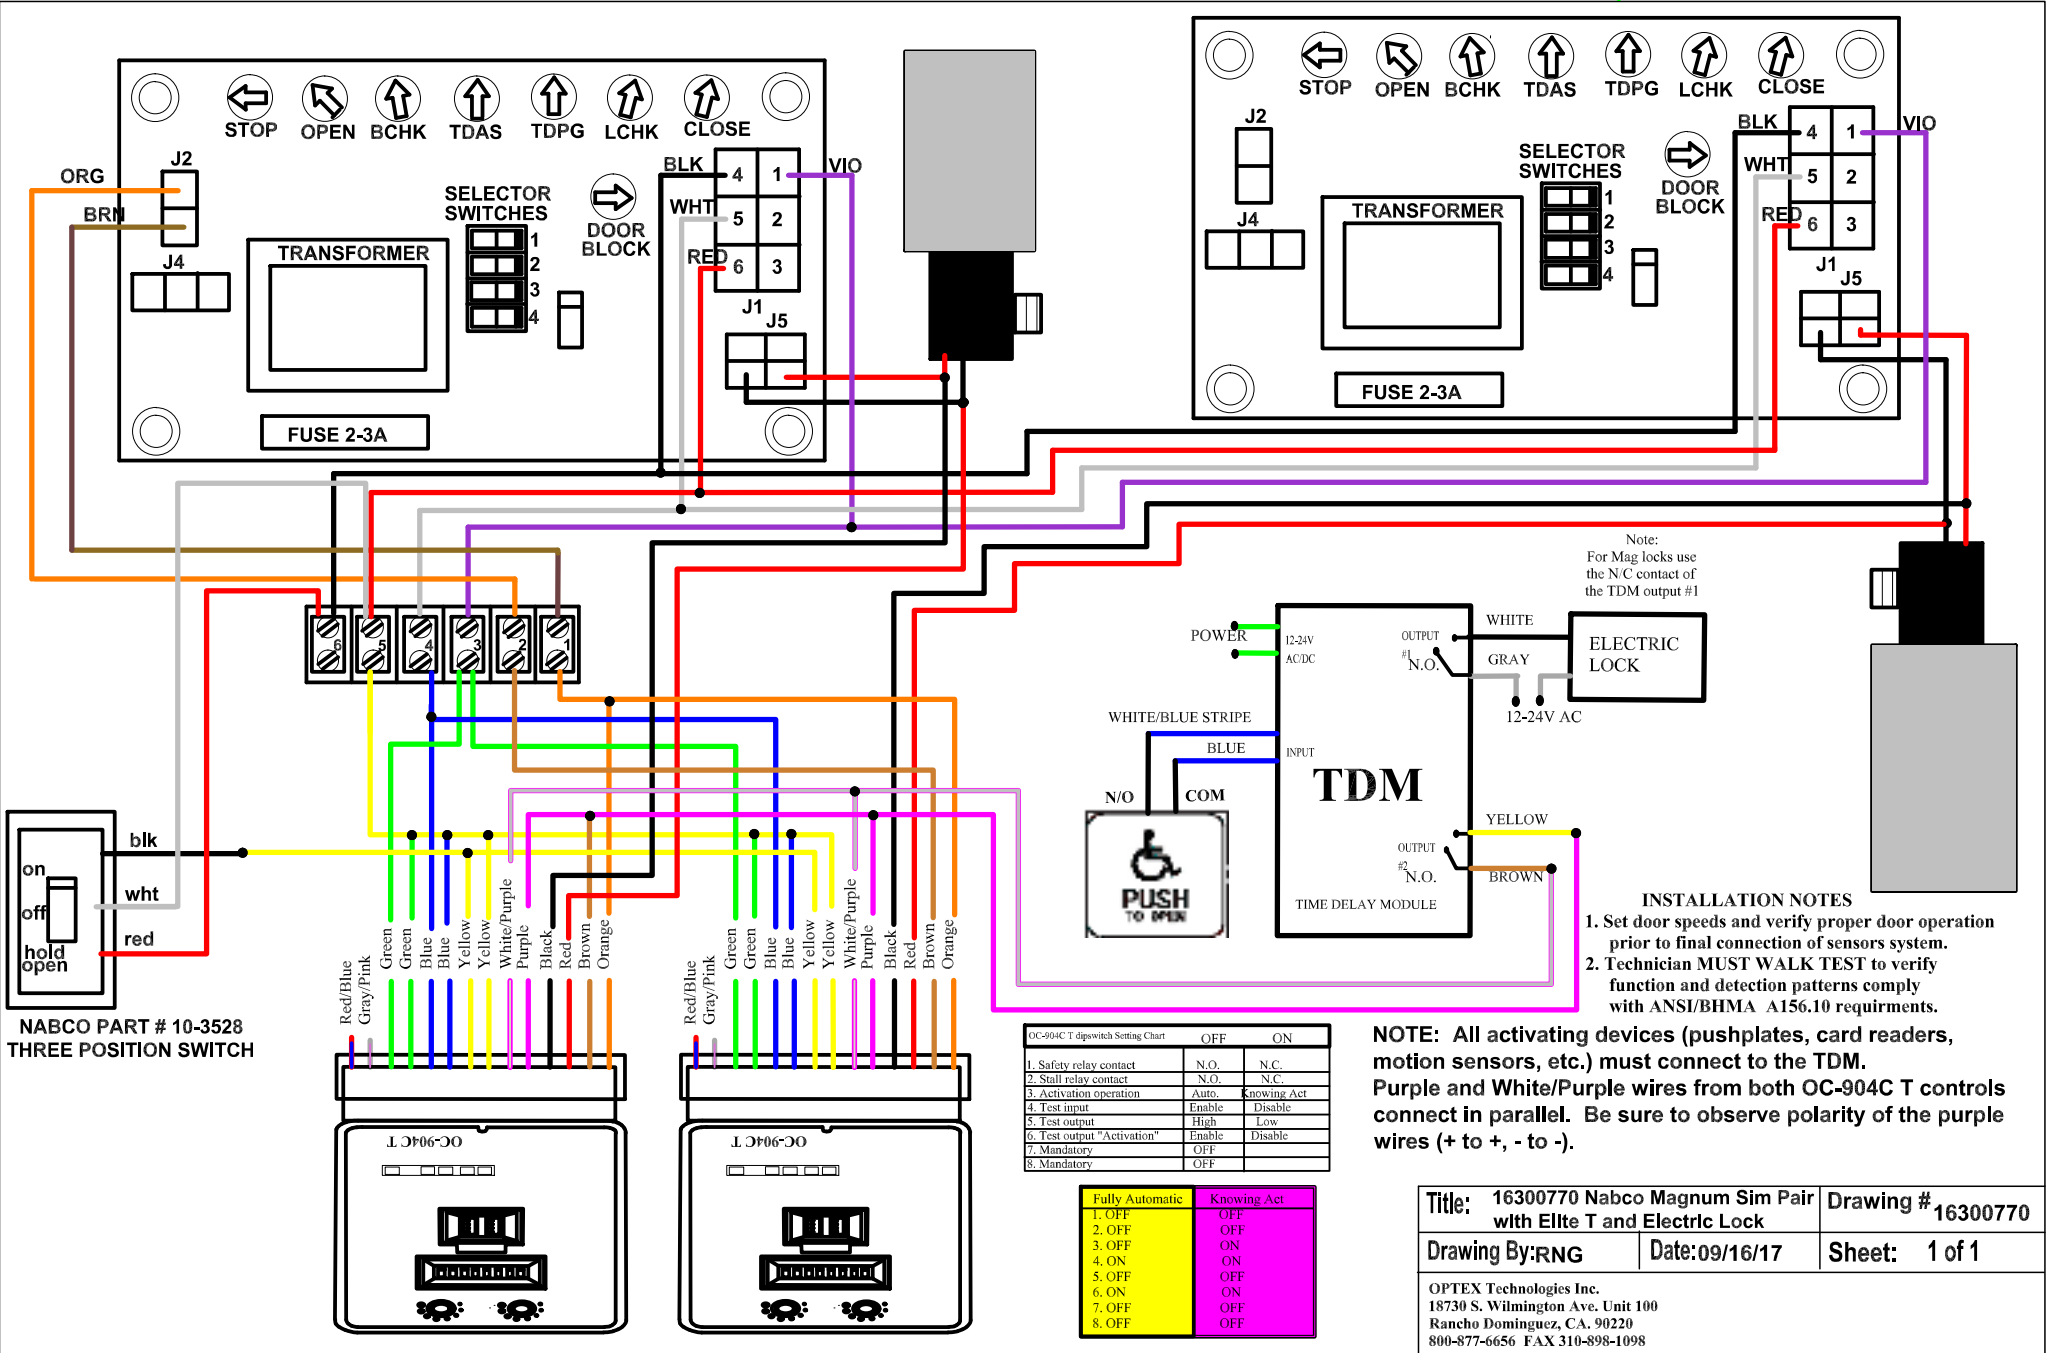

Note:
For Mag locks use
the N/C contact of
the TDM output #1

INSTALLATION NOTES

1. Set door speeds and verify proper door operation prior to final connection of sensors system.
2. Technician MUST WALK TEST to verify function and detection patterns comply with ANSI/BHMA A156.10 requirements.

NOTE: All activating devices (pushplates, card readers, motion sensors, etc.) must connect to the TDM. Purple and White/Purple wires from both OC-904C T controls connect in parallel. Be sure to observe polarity of the purple wires (+ to +, - to -).

OC-904C T dipswitch Setting Chart		OFF	ON
1. Safety relay contact	N.O.	N.C.	
2. Stall relay contact	N.O.	N.C.	
3. Activation operation	Auto.	Knowing Act	
4. Test input	Enable	Disable	
5. Test output	High	Low	
6. Test output "Activation"	Enable	Disable	
7. Mandatory	OFF		
8. Mandatory	OFF		

Fully Automatic	Knowing Act
1. OFF	OFF
2. OFF	OFF
3. OFF	ON
4. ON	ON
5. OFF	OFF
6. ON	ON
7. OFF	OFF
8. OFF	OFF

Title: 16300770 Nabco Magnum Sim Pair with Elite T and Electric Lock

Drawing # 16300770

Drawing By: RNG

Date: 09/16/17

Sheet: 1 of 1

OPTEX Technologies Inc.
18730 S. Wilmington Ave. Unit 100
Rancho Dominguez, CA. 90220
800-877-6656 FAX 310-898-1098