

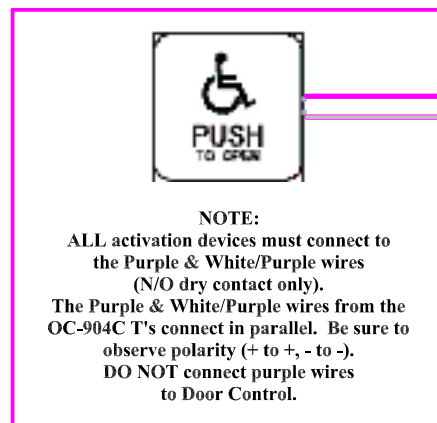
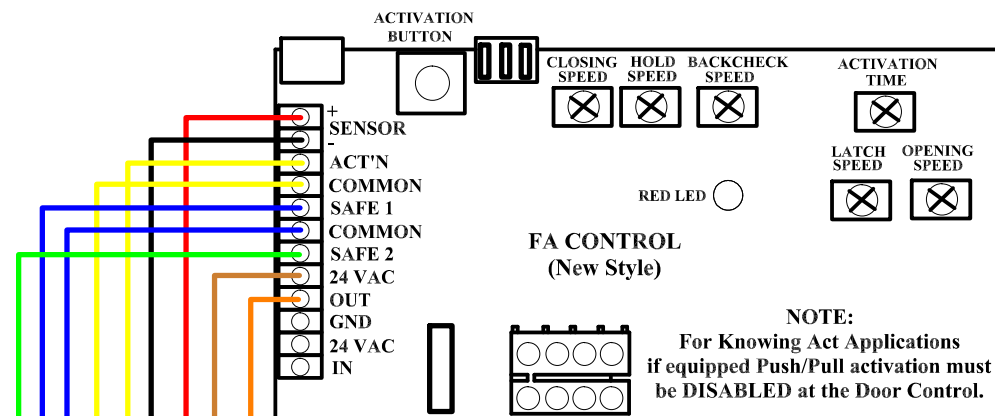


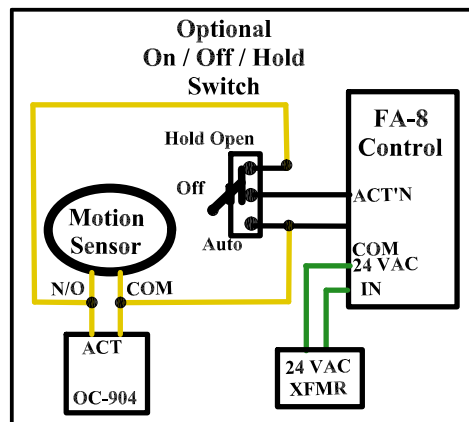

OC-904C T dipswitch Setting Chart		
	OFF	ON
1. Safety relay contact	N.O.	N.C.
2. Stall relay contact	N.O.	N.C.
3. Activation operation	Auto.	Knowing Act
4. Test input	Enable	Disable
5. Test output	High	Low
6. Test output "Activation"	Enable	Disable
7. Mandatory	OFF	
8. Mandatory	OFF	

Fully Automatic	Knowing Act
1. OFF	OFF
2. OFF	OFF
3. OFF	ON
4. ON	ON
5. OFF	OFF
6. ON	ON
7. OFF	OFF
8. OFF	OFF

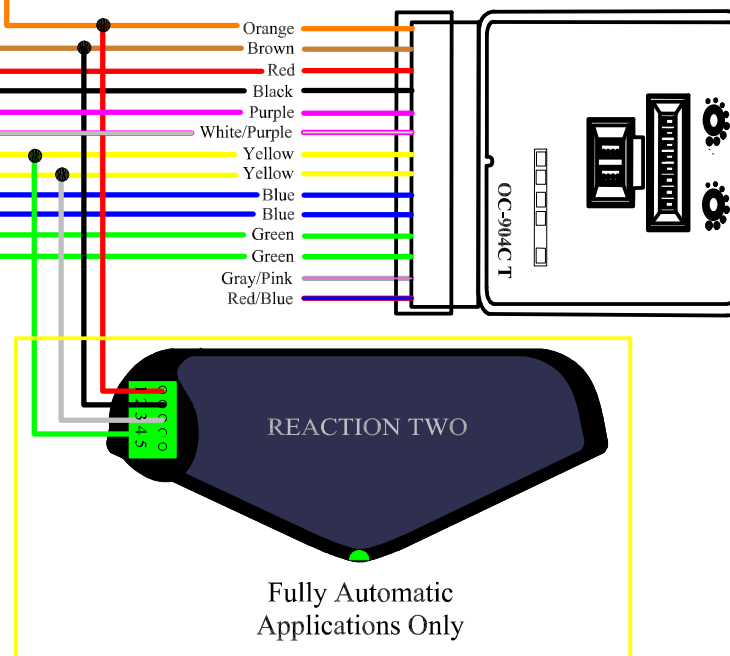

INSTALLATION NOTES

- Set door speeds and verify proper door operation prior to final connection of sensor system.
- Technician MUST WALK TEST to verify function and detection patterns comply with ANSI/BHMA A156.10 requirements.
- When using two single FA controls for simultaneous pairs, must run sync lines between controls on ACTN, COMMON, SAFE 1, COMMON, SAFE 2.

Title: 16300690 Hunter FA-8 Control (New Style) Single with Elite T		Drawing # 16300690
Drawing By: PWK	Date: 09/16/17	Sheet: 1 of 1
OPTEX Technologies Inc. 18730 S. Wilmington Ave. Unit 100 Rancho Dominguez, CA. 90220 800-877-6656 FAX 310-898-1098		