

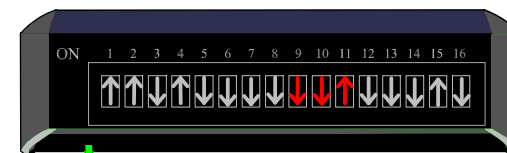


Unislide Control


Note:
Dipswitch 4 OFF, Presence Detection = N.O.
Dipswitch 7 ON, Monitoring

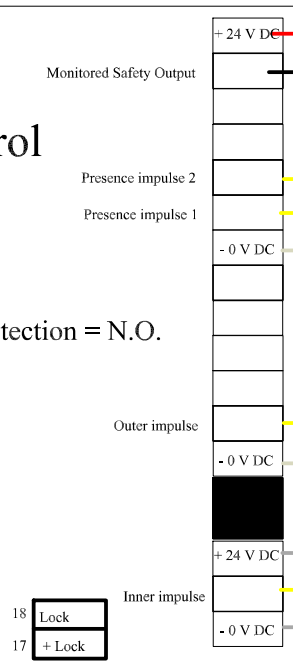

OA FLEX T EXTERIOR

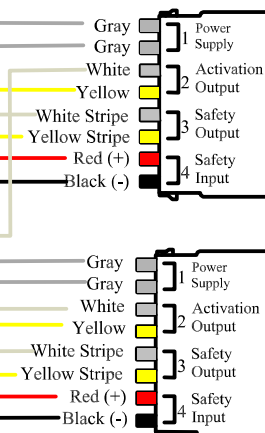

OA FLEX T INTERIOR

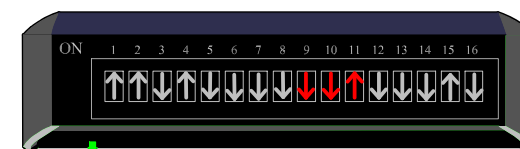

Notes:

1. Verify proper door operation prior to final connection of sensors.
2. On Unislide control, set dipswitch 4 OFF, set dipswitch 7 ON.
3. OA FLEX T dipswitch 9 & 10 must be OFF (down) & dipswitch 11 ON (up) for proper monitoring operation.
4. Technician must perform a field test to verify substantial compliance with ANSI/BHMA A156.10 Section 8.

Title: 16300240 ASSA ABLOY UniSlide with OA FLEX T		Drawing # 16300240
Drawing By: JCK	Date: 5/9/16	Sheet: 1 of 1
Optex Technologies Inc. 18730 S WILIMINGTON AVE UNIT 100 RANCHO DOMINGUEZ, CA 90220 800-877-6656 FAX 310-898-1098		