

SAFER®

Product No | Model name
01G | 6.8L CARBON / GLASS

WARNINGS


- Do not use if cylinder has been damaged;
- Do not fully empty (min 2 bar);
- Install cylinder valve to specific torque settings in accordance with EN ISO 13341;
- Operate and maintain in accordance with manufacturer's instructions;
- Do not use a vacuum.

FILLING

- Liner max temperature 80°C;
- Fill only with breathing quality air in accordance with EN 12021;
- Recommended filling rate 50bar/min.

SAFER® C/GLASS

LABEL

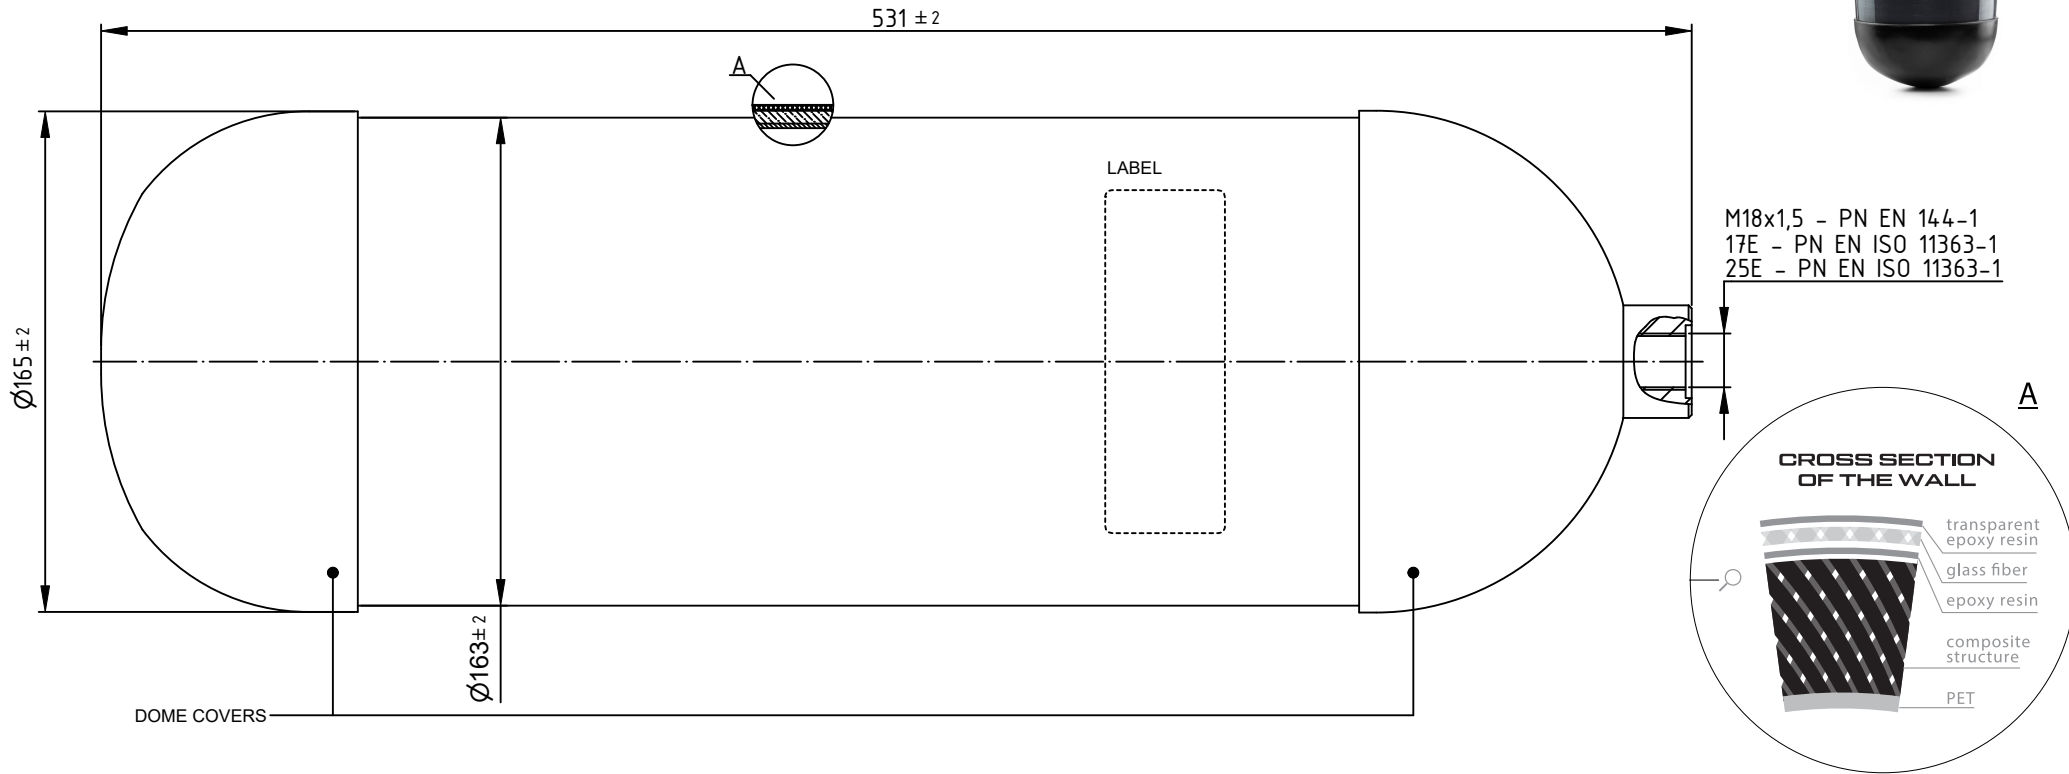

TECHNICAL DATA:	COMMENTS:	TOLLERANCES:	DIRECTIVE:
Water volume (v): 6.8 L	1. The cylinder was designed in accordance to EN 12245	Capacity: +5%	2014/68/EU CE
Max working pressure at 15°C (PS/PW): 300 bar	2. Mounting torque in accordance to ISO 13341	Weight: ±5%	
Max working pressure at 60°C (PSmax): 374 bar	3. Designed viability of the cylinder - No Limit Life (NLL)	DATE OF DRAWING:	
Temperature range (TS): -40°C/+60°C	4. Weight of a cylinder: 4,5 kg	27/01/2025	
Test pressure (PT/PH): 450 bar	5. Total weight with accessories: 4,8 kg		
Drawing no: AS3-01-00	6. Carried substances: AIR, CO₂, N₂		
Structure composite: Carbon / Glass.	7. Do not use vacuum.		
	8. Can be used in underwater applications: Yes		