SAFER®

Product No	Model name
02C	2L CARBON/ ARAMID

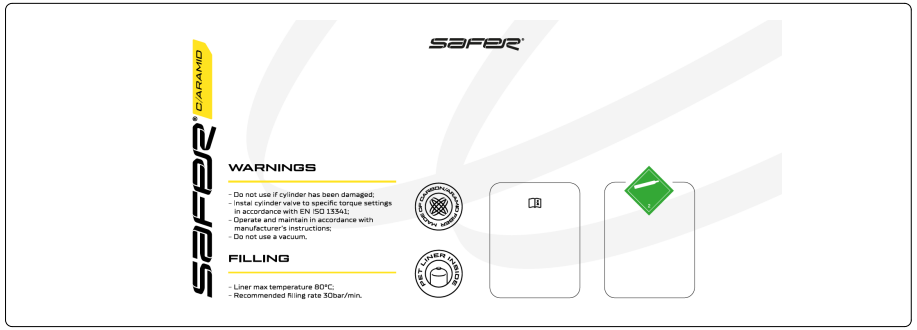

LABEL

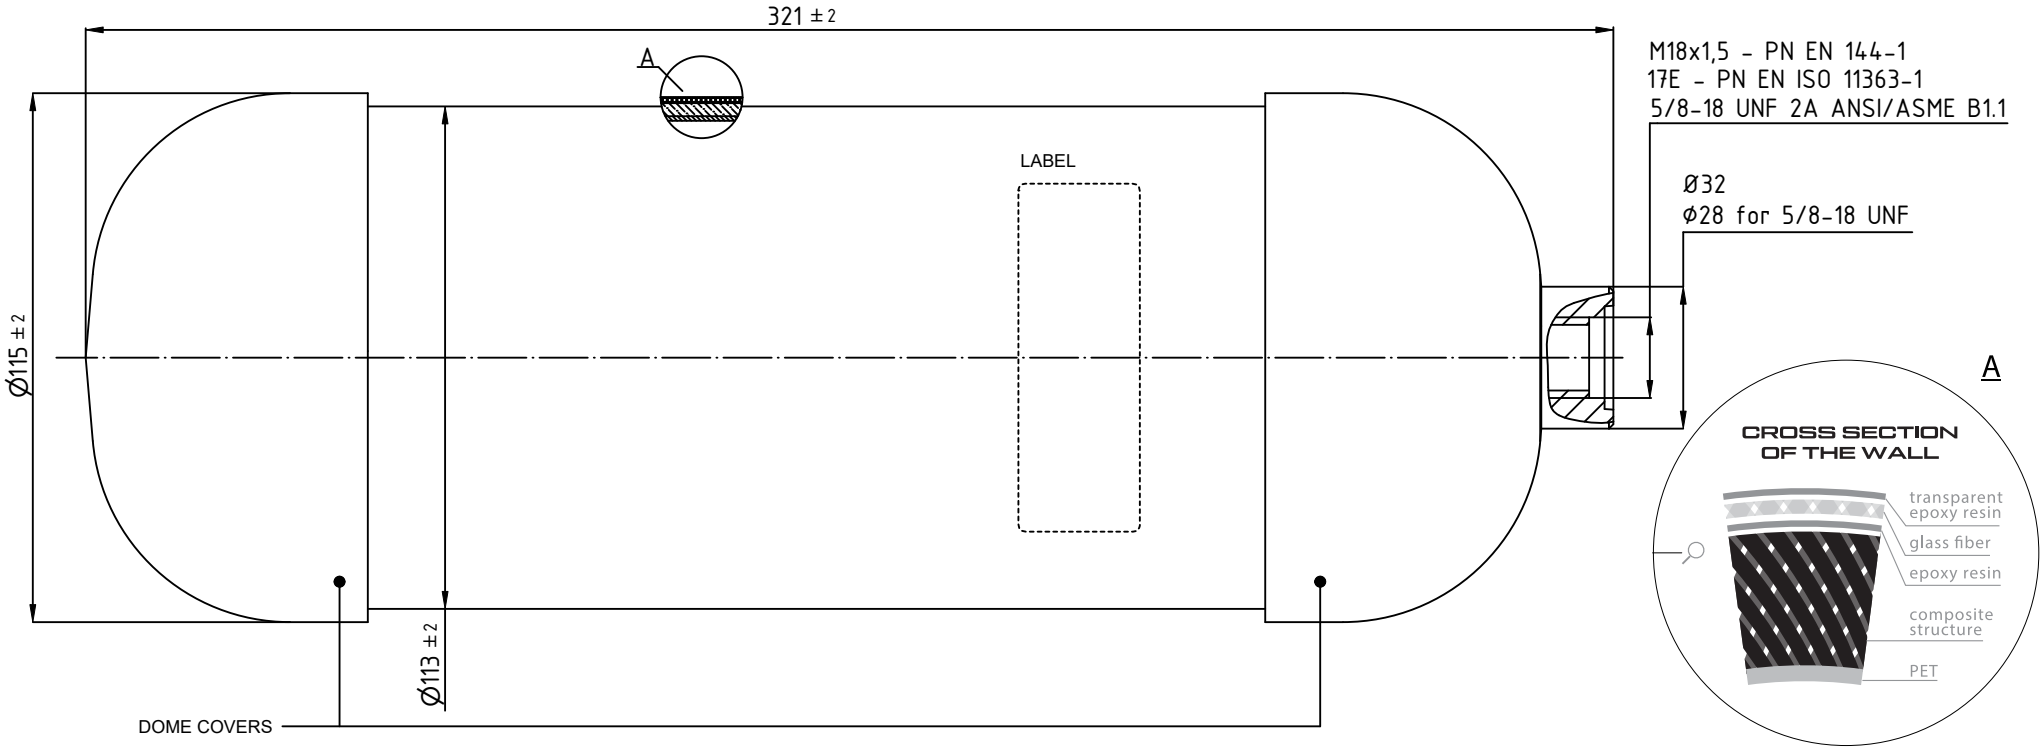

TECHNICAL DATA:	
Water volume (v):	**2L**
Max working pressure at 15°C (PS/PW):	**300 bar**
Max working pressure at 60°C (PSmax):	**374 bar**
Temperature range (TS):	**-40°C/+60°C**
Test pressure (PT/PH):	**450 bar**
Drawning no:	**AS7-01-00**
Structure composite:	**Carbon / Aramid**

COMMENTS:

1. The cylinder was designed in accordance to **EN 12245**
2. Mounting torque in accordance to **ISO 13341**
3. Designed viability of the cylinder - No Limit Life (NLL)
4. Weight of a cylinder: **1,0 kg**
5. Total weight with accesories: **1,1kg**
6. Carried substances: **AIR, N2, Ar**
7. Do not use vacuum.
8. Can be used in underwater applications: **YES**

TOLLERANCES:

Capacity: +5%
Weight: ±5%

DATE OF DRAWNING:

04/02/2025

DIRECTIVE:

2014/68/EU CE

2010/35/EU