

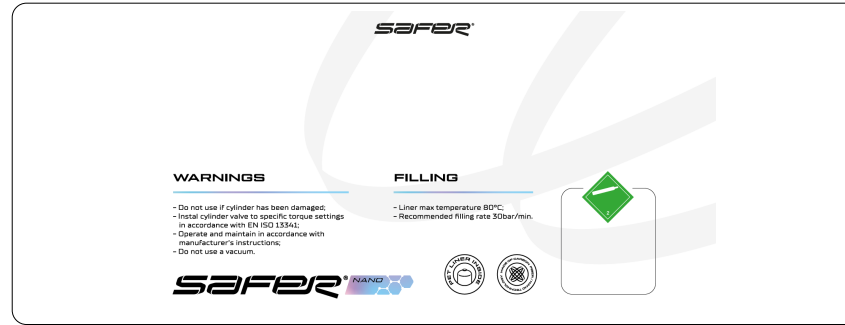


# SAFER<sup>®</sup>

Product No | Model name  
**05N | 1.5L CARBON / NANO TECHNOLOGY**

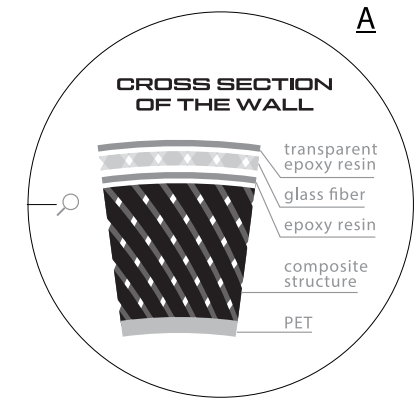

LABEL

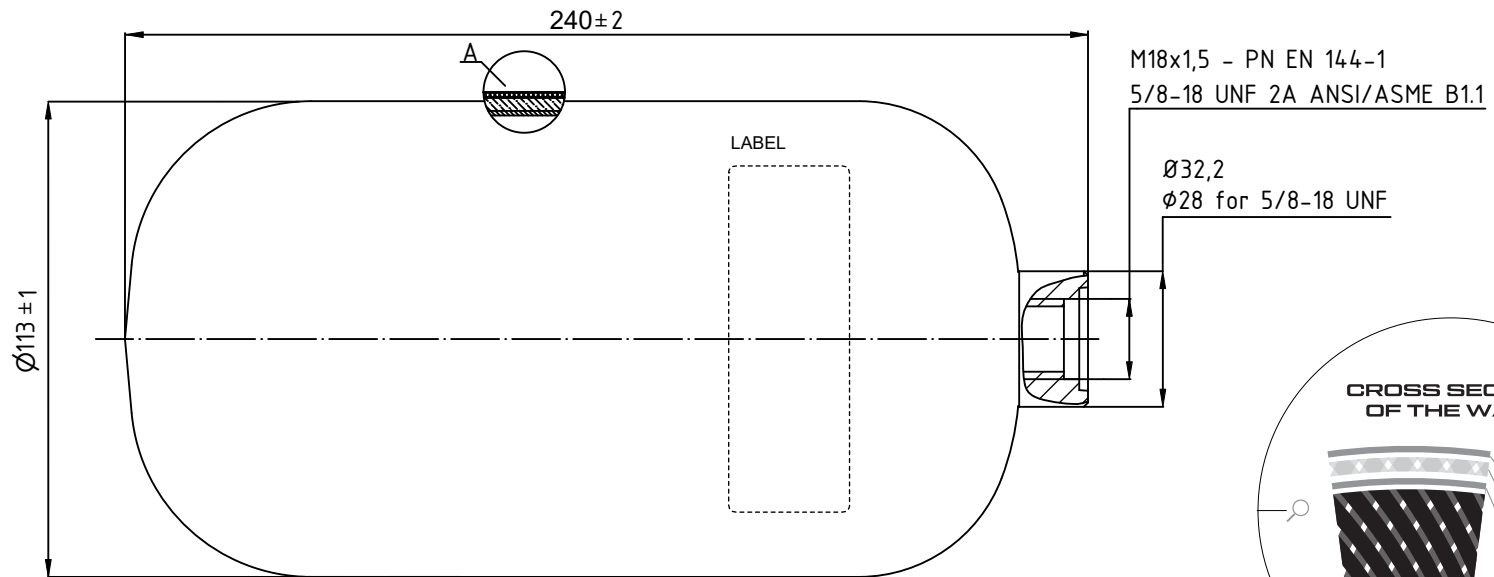

TECHNICAL DATA:	COMMENTS:	TOLLERANCES:	DIRECTIVE:
Water volume (v): <b>1.5L</b>	1. The cylinder was designed in accordance to <b>EN 12245</b>	Capacity: <b>+5%</b>	2014/68/EU <b>CE</b>
Max working pressure at 15°C (PS/PW): <b>300 bar</b>	2. Mounting torque in accordance to <b>ISO 13341</b>	Weight: <b>±5%</b>	2010/35/EU <b>TY</b>
Max working pressure at 60°C (PSmax): <b>374 bar</b>	3. Designed viability of the cylinder - No Limit Life (NLL)	DATE OF DRAWING:	
Temperature range (TS): <b>-40°C/+60°C</b>	4. Weight of a cylinder: <b>0,75 kg</b>	21/01/2025	
Test pressure (PT/PH): <b>450 bar</b>	5. Total weight with accessories: <b>0,75 kg</b>		
Drawing no: <b>N02-00-00</b>	6. Carried substances: <b>AIR, N2, Ar</b>		
Structure composite: <b>Carbon / Nano tech.</b>	7. Do not use vacuum.		
	8. Can be used in underwater applications: <b>Yes</b>		