


tumbled

FLOORING & WALLING

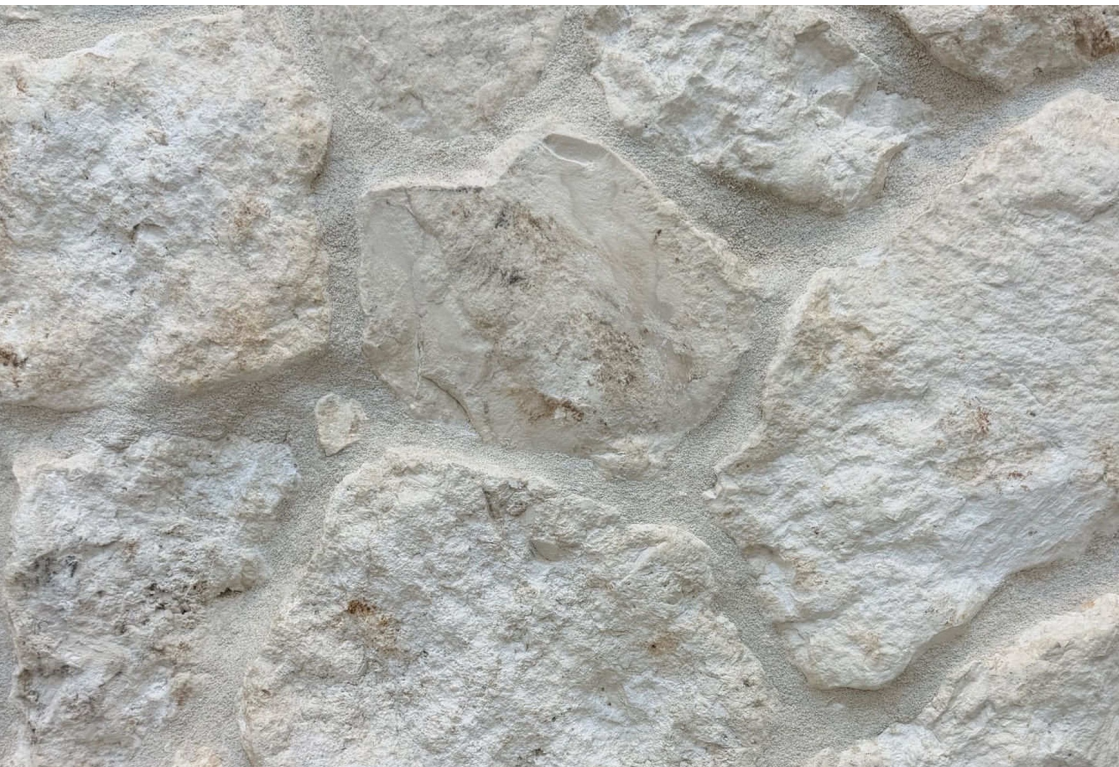

Tari

IRREGULAR WALLING

COLOUR

Cream, White
with rust tones

TILE EDGES

Tumbled

APPLICATION

Walling

ORDERING DETAILS

Lead-time for product is 18 weeks unless in stock.



WALLING

Tari

An irregular walling format hand-shaped from cream and white limestone, capturing the character of traditional dry-stone walling on contemporary facades and feature walls. Soft, chalky whites and creams pair with a tumbled edge for an aged, hand-laid look that only settles with time.

WALLING SIZE

Irregular · 20–40mm

Sold in 1m² lots

CORNERS

Irregular · 20–40mm

Sold per lineal metre (1 lm ≈ 0.3m²)

PLEASE NOTE — INSTALLATION

When installing without a grout joint, allow an extra 15–20% for wastage so the stonemason can cut and butt-joint pieces. The installer should unpack each crate and use the full mix of sizes supplied; Tumbled will not exchange smaller pieces for larger.

RECOMMENDED GROUT — WALLING

Walling mix: 5 parts All Stone White Sand · 2 parts White Lime · 1 part Aalborg White Cement · Master Additive. Prebagged grout colours are also available — selected by your designer or stonemason.

Guide only — confirm against a physical sample. Tumbled does not supply grouts.

SEALING & CARE

Tumbled recommends sealing Tari Irregular Walling with Actichem Defender SV. For ongoing care guidance, visit tumbled.com.au. Defender SV is a premium-grade, solvent-based water repellent designed to protect porous stone and construction materials. It provides deep, long-lasting impregnation to shield surfaces from water ingress, chloride ions, efflorescence, and biological growth while maintaining a natural finish.

tumbled

105 Gilbert Street, Adelaide SA 5000
T. 1800 512 162 · E. info@tumbled.com.au
tumbled.com.au

EXPLORE
THE
COLLECTION

