


HSE Single-user Sink - Construction / Events







HSE Single-user sink - construction, event and off-grid hand-washing

A single sink with a wide and deep bowl to comply with the UK Health & Safety Executive construction site requirements for users to be able to wash the full forearm. This sink is typically used inside plastic, mains-free portable toilets but may also be used elsewhere as an extra hand washing solution.

Hygienic, foot- operated pump minimises hand contact. The sink pedestal acts as the fresh water reservoir for 45 litres of water: grey, "soapy" water in the bowl runs away via the waste pipe to the portable toilet tank or a separate container / drain.



Typical application:
used inside a mains-free,
portable toilet on a
construction site or at
an outdoor event

Contact us for more information

Features

- Fresh water stored in sink pedestal 45 litres
- Removable cap for filling and sterilising
- Waste water drains via external hose to toilet tank, suitable container or mains drain
- Hygienic, robust foot pump dispenses 85ml of water for each press
- Drain plug at base

Options

• Optional hot water add-on ightarrow



Applications

- Construction Sites
- Outdoor Events
- Campsites & Festivals
- Fairs & Fetes
- Zoos
- Allotments
- Fruit Picking



Technical Data*

Height:	930mm
Bowl / Pedestal Width:	560 / 400mm
Bowl / Pedestal Depth:	250 / 170mm
Dry / Wet Weight:	7.5 / 52.5kgs
Fresh Water Capacity:	16 Gallons / 45 litres
Waste Water Capacity:	0 Gallons - drains externally

*We reserve the right to amend the technical specification to improve the product without prior notification.

View this sink online here →




UK Freephone: 0800 334 5742 Int: +44 (0)1922 716725 Email: sales@plasticsol.com Website: www.plasticsol.com



HSE Single-user Sink - Construction / Events



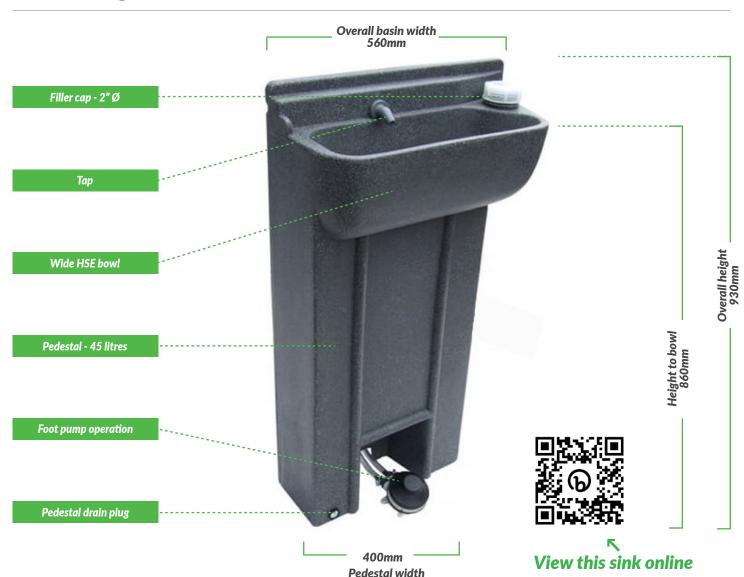

How does it work?

This sink is typically installed on the left-hand side of the toilet unit (on entry) and the extended width bowl - a Health & Safety construction site requirement to allow users to wash their hands and full forearms - will overhang the toilet tank by a few centimetres.

The sink pedestal acts as the fresh water chamber, is filled via a 2" screwed cap to the right of the tap and can be drained via a drain plug at the base.

- Press the foot-operated pump to dispense fresh water into the sink bowl
- Soapy "grey" water drains from the sink bowl via a 3/4" hose to the toilet tank
- The sink is typically cleaned and replenished with fresh water during the standard cleaning schedule arranged with a serviced portable toilet rental company

