




Evolution - know your Tuff Tank


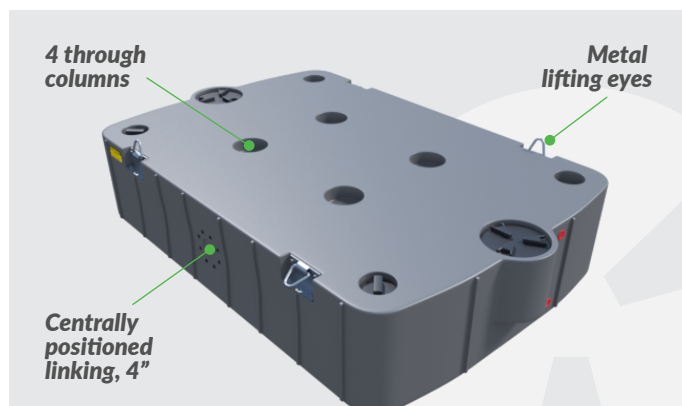


Tuff Tank 1 // Tuff Tank 2 - 500 gallons

In production 2010 - 2014

Key features:

- Metal lifting eye brackets
- 4 x through columns from top surface to floor
- Linking point centrally positioned in both long edges
- Linking kit used 50 cms of 4" hose and metal flanges **(discontinued)**
- Tank dimensions (m): 2.8 L x 2.0m W x 0.45 H

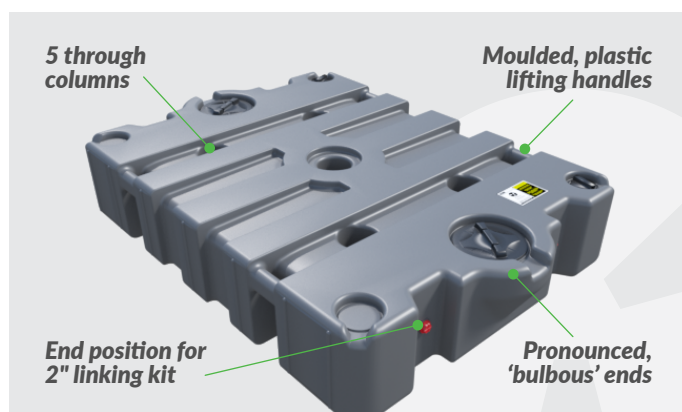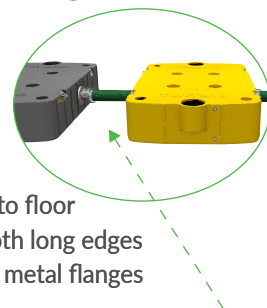


Tuff Tank 3 - 500 gallons

In production 2014 - 2018

Key features:

- 4 x moulded-in plastic handles / lifting points
- 5 x through columns from top surface to floor
- Linking points moved to both short edges (4 per tank)
- Linking kit used 120 cms of 2" hose and quick-release fittings
- Top surface & emptying ports angled to prevent rain filling tank
- Tank dimensions (m): 2.8 L x 2.0m W x 0.51 H

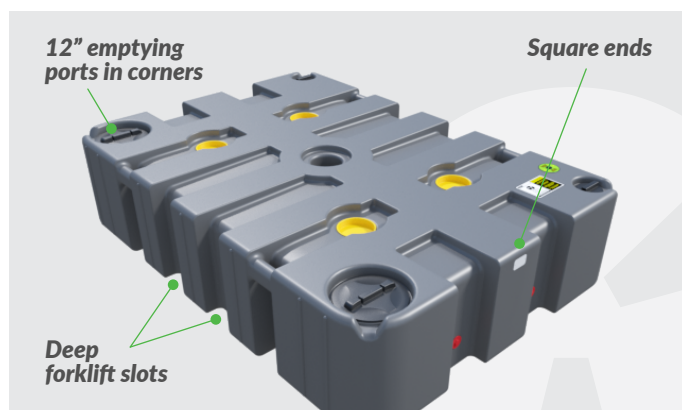

Tuff Tank 4 - TT500, TT750 & TT1000 gallons

**In production from 2019 -
(1 x lid and 3 x separate bases, 1 for each volume)**

Key differences from previous model:

- 12" emptying ports moved to corners (not central)
- Rectangular shape (previous bulbous ends removed)
- Heavily dimpled underside
- Deep forklift slots to aid moving and storing when not in use
- Linking kit used 155 cms of 2" hose and 2" quick-release fittings
- Tank dimensions (m): 3.0 L x 2.1m W
TT500 = 0.485 H, TT750 = 0.69 H, TT1000 = 0.9 H.

As customer requirements and production processes have changed since the first Tuff Tank was designed (in 2010) the range has undergone several model improvements...





Contact us for more information



Linking two or more Tuff Tanks

Easily extend the volume of waste you capture by using our linking kit to connect two or more tanks together.

Valid for: all Tuff Tank variants since January 2015.
TT3, TT500, TT750 & TT1000.

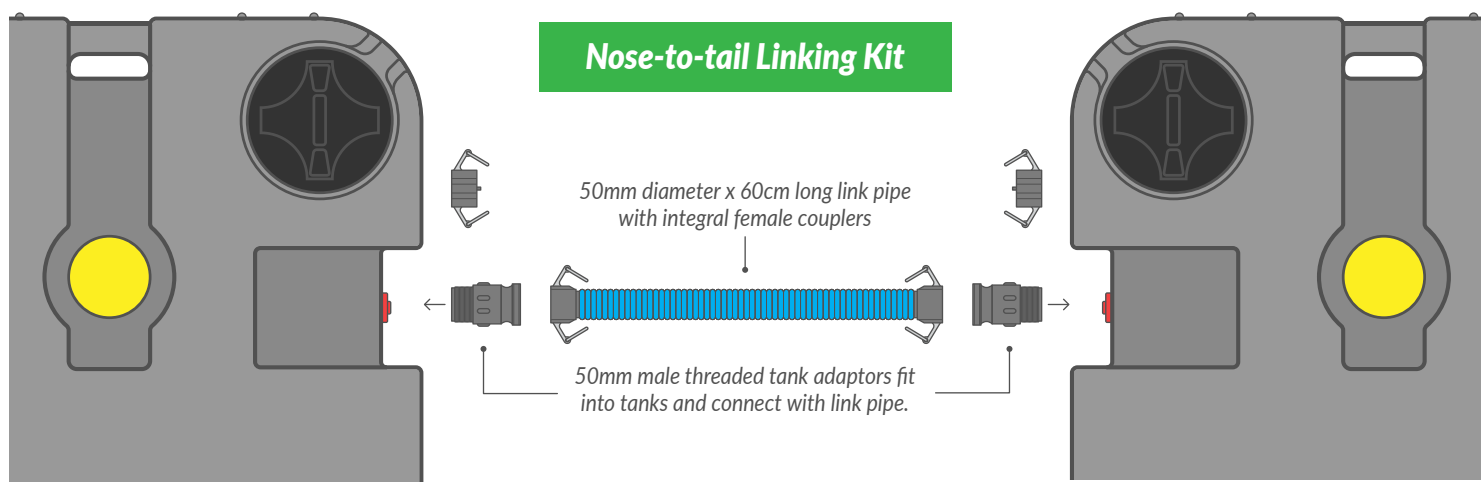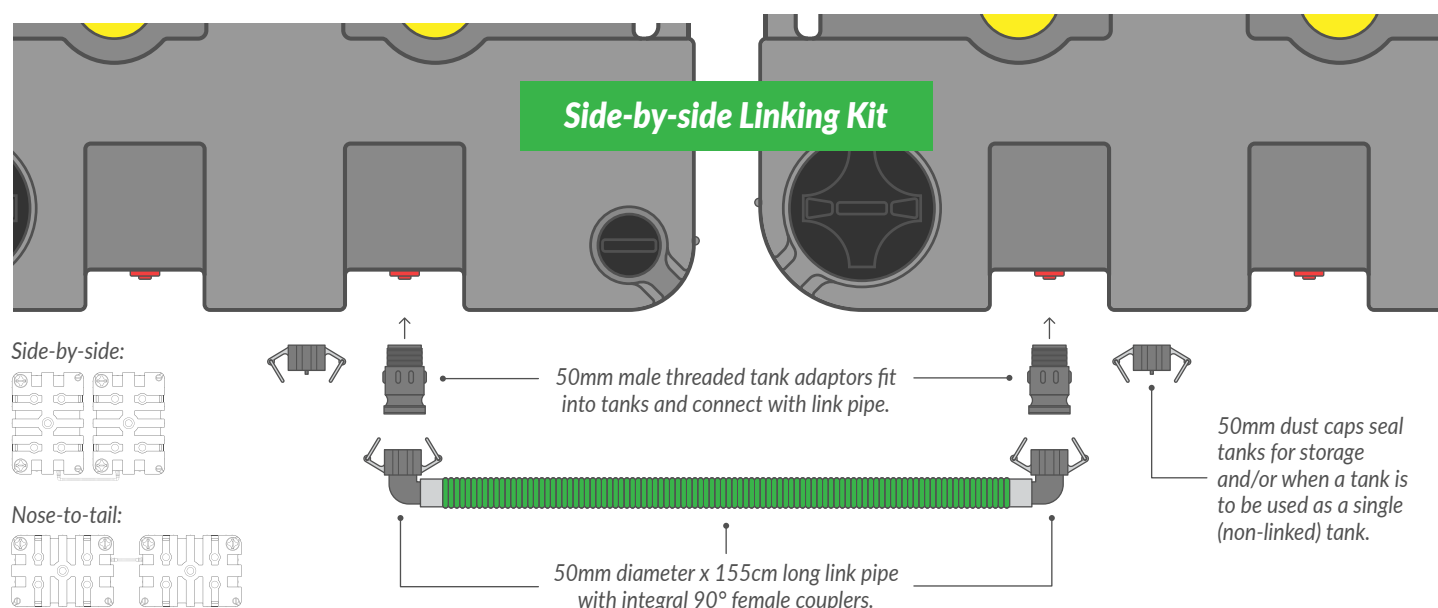

Flexibility - you choose...

With options to link tanks **side-by-side** or **nose-to-tail**, two easily accessible ports at each end of the tank allow simple connection from one tank to another... and so on... to give even greater flexibility on site.



If you no longer need tanks to be linked you can easily convert them back into single, standalone versions. Simply empty the contents, remove the link pipe and fit the 50mm dust caps to the tank adaptors.