



(for a ceiling thickness of 25-33 mm)


TRIMLESS is a new solution for BROKIS collections that eliminates the need for a conventional ceiling canopy and simplifies installation in drywall ceilings. It gives ceiling installations a clean, minimalistic appearance and provides a new degree of variability in creating original lighting compositions.


All versions are compatible with drywall thicknesses of 25–33 mm, though the ideal thickness is 25 mm. The depth of the ceiling anchor inset depends on the thickness of the drywall, i.e. the thicker the drywall, the deeper the anchor sits within the body.

Maximum load capacity varies depending on the type of ceiling sheet material and grid system. The maximum capacity of the component will exceed the capacity of the cables/ropes and drywall.


- 3 versions (cable, 12 mm rope, 16 mm rope)
- 3 installation tools, one for each version
- 3 installation holes


#### Version for cable: diameter 58-59 mm

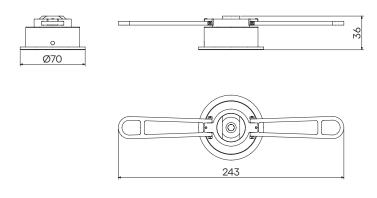



### Version for 12 mm rope: diameter 63-64 mm

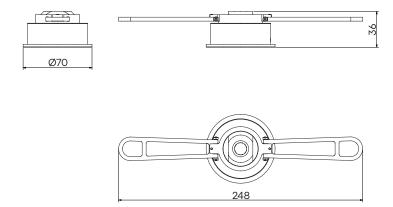











# Version for 16 mm rope: diameter 68-69 mm

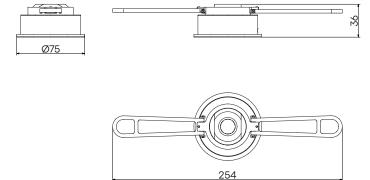




Materials and fnishes/colour

fixture + cover + clamp arms – galvanized steel clamp – POM (polyxymethyl) + Dural anticorrosion finish on all parts


The front side of the clamp and cover are powder coated in black (RAL 9005) + white texture (RAL 9003).

### Installation tools

### Version for cable: diameter 58-59 mm

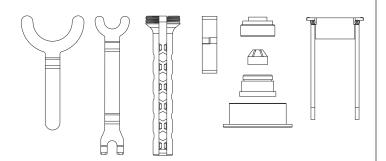

### Version for 12 mm rope: diameter 63-64 mm

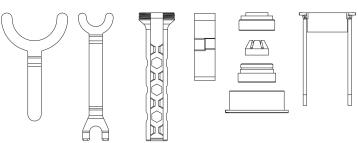

## Version for 16 mm rope: diameter 68-69 mm

