

FIXTURE TYPE	
MODEL NUMBER	
PROJECT	

CEW Series Thermoplastic Exit Signs

SPECIFICATIONS

- Housing is constructed of molded virgin UL94V0 thermoplastic
- Canopy is supplied with all models for wall, end, or ceiling mount
- All models are illuminated with high-intensity red or green LEDs and meet UL requirements for uniformity.
- Universal 120/277 volts 60hz input. AC lockout and low voltage disconnect.
- Red 3.5/4.2 watts @ 120/277 volts
- Green 7.9/8.4 watts @ 120/277 volts
- Sealed NiCad battery - Provides a minimum of 90 minutes of emergency operation
- ETL Listed to UL924. Meets or exceeds the requirements Compliance of the National Code and NFPA101
- One-year warranty from the date of shipment on the entire unit. 7-year pro-rata warranty on the batteries. See Warranty Statement for details.

STANDARD FEATURES ALL MODELS


- Universal 120/277-volt 60 Hz field selectable input
- Molded of virgin UL 94V0 thermoplastic in a neutral white finish.
- Easy to install snap-together construction
- Long Life LED lamps provide bright and even illumination.
- Low power consumption
- Red or Green Exit letters
- White housing (Black is optional)
- Snap-in, chevron type, directional arrows.
- Universal back, ceiling, or end mounting.
- Available in single-face or universal models

EMERGENCY MODELS

- Premium nickel cadmium maintenance-free battery
- 90 minutes of emergency illumination
- Fully automatic solid-state charger
- Recharge times as per UL guidelines
- Solid state relay supervision
- Low battery voltage disconnects
- AC lockout circuit reduces installation time
- Brownout protection.
- AC-ready LED indicator
- Momentary test switch.
- Operating range 68°F to 86°F
- Self-diagnostics circuitry is available (Optional)
- Remote test (Optional)
- MADE IN THE USA



DIMENSIONS

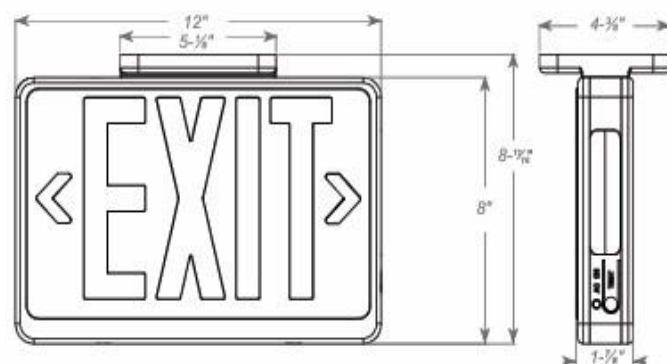

CEW-XLD - R -1 -6 -P -W -DR

MODEL

- CEW (AC SIGN)
- CEW-XLD (90 MINUTE BATTERY BACKUP)

LETTER COLOR

- R = Red
- G = Green

NUMBER OF FACES

- 1 = Single Face
- U = Universal

LETTER SIZE

- 6 INCHES

HOUSING

- P Plastic

HOUSING COLOR

- W White
- B Black

OPTIONS

- BZ Buzzer
- DL Led Down Light
- DR Damp rated
- E Self-diagnostic
- RT Remote test
- F flasher
- FBZ Flasher and buzzer
- FR Fire alarm
- 2CK1 Dual circuit, 120 volts
- 2CK2 Dual circuit, 277 volts
- 110/50 110 Volts, 50Hz

EXAMPLE CAT

- CEW-XLD-R-1-6-P-W-DR