


Fixture Type:	
Model Number:	
Project:	

MX Series Commercial Grade Thermoplastic Exit Signs

ORDERING GUIDE

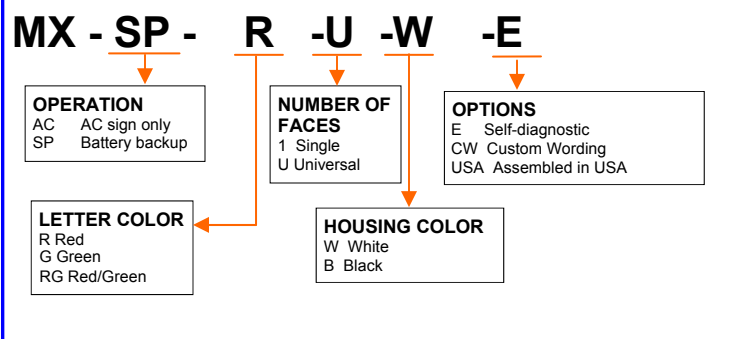

STANDARD FEATURES

All Models

- Universal 120/277 volt 60 Hz field selectable input
- Injection-molded, high impact, UV-stabilized, UL 94 V-0 Thermoplastic
- Easy to install snap together construction
- Long Life LED lamps provide bright and even illumination.
- Low power consumption
- Red or Green Exit letters
- White or black housing
- Snap-in, chevron type, directional arrows.
- Universal back, ceiling or end mounting.
- Available in single face or universal models

Emergency Models

- Premium nickel cadmium maintenance free battery
- 90 minutes of emergency illumination
- Fully automatic solid state charger
- Recharge times as per UL guidelines
- Solid state relay supervision
- Low battery voltage disconnect
- AC lockout circuit reduces installation time
- Brownout protection.
- AC ready LED indicator
- Momentary test switch.
- Self diagnostics circuitry is available (Optional)

SPECIFICATIONS

Construction Housing is constructed of injection molded, high impact, UV stabilized, UL94V0 thermoplastic

Installation Canopy is supplied with all models for wall, end, or ceiling mount.

Illumination All models are illuminated with high intensity red or green LEDs and meet UL requirements for uniformity.

Electronics Universal 120/277 volts 60hz input. AC lock out and low voltage disconnect.


Power Consumption Red 1.8 / 1.9 watts @ 120/277 volts
Green 1.5 / 1.6 watts @ 120/277 volts

Battery Sealed NiCad battery - Provides a minimum of 90 minutes of emergency operation

Code Compliance UL924 and Damp location listed.
Meets NFPA and NEC guidelines

Warranty One year warranty from date of shipment on entire unit. 5 year pro rata warranty on the batteries. See Warranty Statement for details.

DIMENSIONS

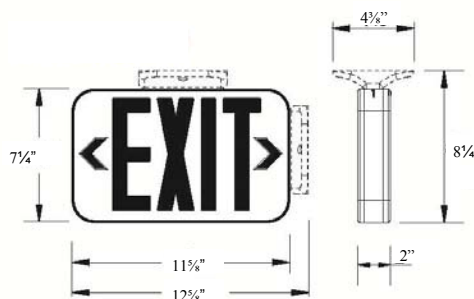

Carpenter Emergency Lighting
Phone: 609-689-3090 Fax: 609-689-3091

2 Marlen Dr., Hamilton, NJ 08691
www.carpenterlighting.com