

Fixture Type:	
Model Number:	
Project:	

CSEL LED Emergency Lighting

ORDERING GUIDE

CSEL80 - (Blank) = White
CSEL80 - B = Black **OPTIONS: SPV=208/220/240**



ILLUMINATION

- Long lasting, efficient ultra-bright white LED lamp heads.
- 12 LEDs per head
- High-performance chrome-plated metalized reflector and plastic lens for optimal light distribution.
- Two fixed LED lamp heads provide optimal center-to-center spacing.

MOUNTING

- Surface mount via quick-connect back plate
- Fits most standard size junction boxes and snaps into place to make internal electrical connections.
- Suitable for wall or ceiling mount.

STANDARD FEATURES

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white finish.
- Universal 120/277 volt 60 Hz input
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads
- Low battery voltage disconnect
- AC lockout
- Brownout protection
- Charge / Ready LED indicator
- Test switch
- 3.6 volts sealed NiCad battery
- Minimum 90 minutes of emergency illumination.


AGENCY APPROVALS

Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
 UL listed for damp locations. (0°C – 40°C)

WARRANTY

Five year warranty on all electronics and housing.
 Battery is pro-rated for five years.

DIMENSIONS

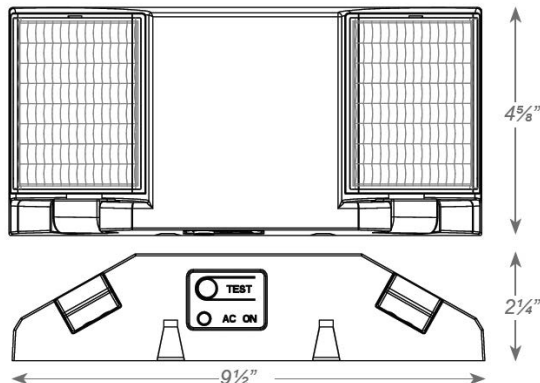

Carpenter Emergency Lighting
Phone: 609-689-3090 Fax: 609-689-3091

2 Marlen Dr., Hamilton, NJ 08691
www.carpenterlighting.com