

Fixture type	
Model Number	
Project	

CEM-DR-LED (1 or 2)

Carpenter's CEM-DR-LED Series high-power LED emergency lighting unit provides 125' path of egress spacing.

Suited for larger areas and egress paths such as warehouses, factories, lengthy corridors, large department store retailers, and schools. This Series eliminates the need for multiple emergency lighting units.

FEATURES AND BENEFITS


- Superlative optical performance up to 125' spacing.
- Eco-friendly, long-life, high-density battery pack.
- Remote capability up to 5.4W.
- UL 924, cUL Listed.
- Suitable for Damp Locations.
- California Energy Commission (CEC) compliant.

SPECIFICATIONS

- **Illumination:** Standard CEM-DR-LED1 includes two 2.7W LED lamp heads, CEM-DR-LED2 includes two 5.4W LED lamp heads
- **Housing:** UL 5VA flame-rated thermoplastic housing
- **Input:** 120-277VAC, 50/60Hz
- **Battery:** Maintenance-free battery
- **Operating Temp:** 10°C to 40°C (50°F to 104°F)
- **Run time:** cULus Listed 90-minute emergency run time, 24-hour recharge time
- **Mounting:** Wall, pendant, I-beam, and pole mount (with available accessory)
- **Finishes:** Black or White
- **Options:** E- Self-test/Self-diagnostics R - Remote Capable (CEM-DR-LED1 only)
- **Certifications:** cULus 924 Listed, meets or exceeds CEC, NEC requirements and NFPA 101
- **Warranty:** Any component that fails due to a manufacturing defect is guaranteed for five years with a separate five-year prorated warranty on the battery. The warranty does not cover physical damage, abuse, or instances of uncontrollable natural forces.



DIMENSIONS

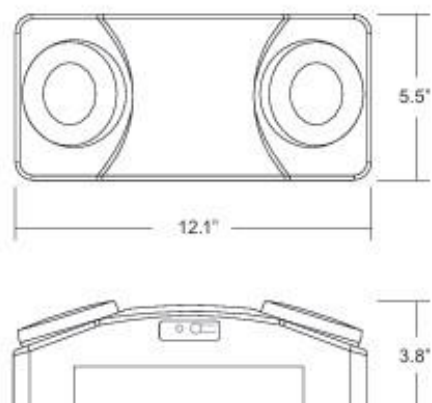

ORDERING GUIDE

CEM-DR-LED	
SERIES	• CEM-DR-LED1 = (2) 2.7W LED LAMPS • CEM-DR-LED2 = (2) 5.4W LED LAMPS
FINISH	• W = White • B = Black
OPTIONS	• E = SELF-TEST/ SELF DIAGNOSTICS • R' = REMOTE CAPABLE (LED1 only)
ACCESSORIES²	• IHB=I-BEAM AND POLE MOUNTING BRACKET • WG= WIRE GUARD (BACK MOUNT) • VG= WET LOCATION/VANDAL GUARD (BACK MOUNT)
NOTES	• 1 NOT AVAILABLE WITH CEM-DR-LED2 SERIES • 2 ORDER AS A SEPARATE ITEM
EXAMPLE CAT #	• CEM-DR-LED1-W-E