



Features

- One-Piece Smart Toilet with integrated personal cleansing
- Chair-Height, compact-elongated bowl
- High-Performance, Tankless Design
- 1.28 gpf (4.8 lpf)

Material

- Vitreous China (Bowl)
- ABS Scratch Resistant Lid

Installation

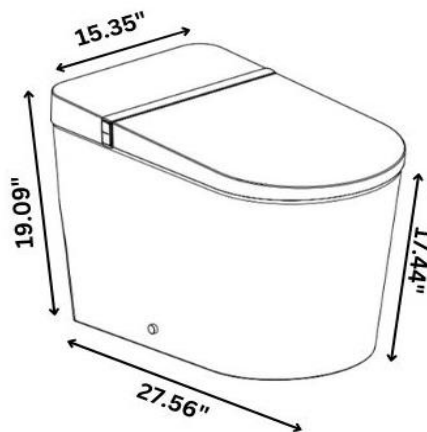
- Floor-mount
- 12" (305mm) Rough-In

Finish





White

Remote



Technical Specifications

Washing	Rear Wash	•	Rated Voltage	120V~
	Front Wash	•	Rated Frequency	60Hz
	Auto Wash	•	Rated Power	1000W
	Oscillating	•	Ambient Temperature	0°C ~ 40°C (32°F ~ 104°F)
	Water Pressure Adjustment	5 Levels	Pressure of Water Supply	30PSI ~ 80PSI
	Water Temperature Adjustment	5 Levels	Flow of Water Supply	≥25L/Min
Drying	Nozzle Position Adjustment	5 Levels	Temperature of Water Supply	3°C ~ 35°C (37.4°F ~ 95°F)
	Warm Dry	•	Water Proof Rate	IPX4
	Dry Temperature Adjustment	3 Levels	Water Temperature	Water Supply Temp. ~41°C (105.8°F)
Seat & Cover	Seat Temperature Adjustment	5 Levels	Water Heating Power	1000W
	Auto Open and Close Seat	•	Seat Temperature	Room Temp. ~41°C (105.8°F)
	Seat Sensor	•	Seat Heater Power	60W
Cleaning	Anti-Bacterial Nozzle	•	Dryer Temperature	Room Temp. ~60°C (140°F)
	Nozzle Self Cleaning	•	Maximum Dryer Speed	≥4 m/s
	Nozzle Manual Cleaning	•	Steam Air Heater Power	250W
	Nozzle Ultraviolet Light Sterilization	•	Codes/Standards	
Flush	Single Flush	•	Meets or Exceeds: UL1431-2012/UL1951/ASME A112.9-2018 CSA B45.1-18	
	Auto Flush	•		
	Pre-Rinse	•		
Additional	Night Light	•	 	
	Remote Control	•		

While we strive to provide accurate measurements for our customers, mistakes happen.

Our goal is to help things run smoothly from shipment to installation, so if you notice any errors in our spec sheets, please let us know.

Our products are handmade & finished so you can expect a tolerance of +/- 1/4" measurements. We strongly recommend waiting until your ordered product is on-site before attempting any rough-in, carpentry, plumbing.

If you want to verify any of our measurements, please feel free to call or email us.

Keeping with our policy of continuing improvement, Venco® reserves the right to change product specifications without notice. For latest specifications, please contact Venco® directly or check our website www.venco.ca

Venco Products Ltd.
7584 Vantage Place
Delta, BC
Canada V4G 1A5
Tel: +1 (604)-940-4960
www.venco.ca