


JIBBI

U-1570 EVO

FLOREY
RENT

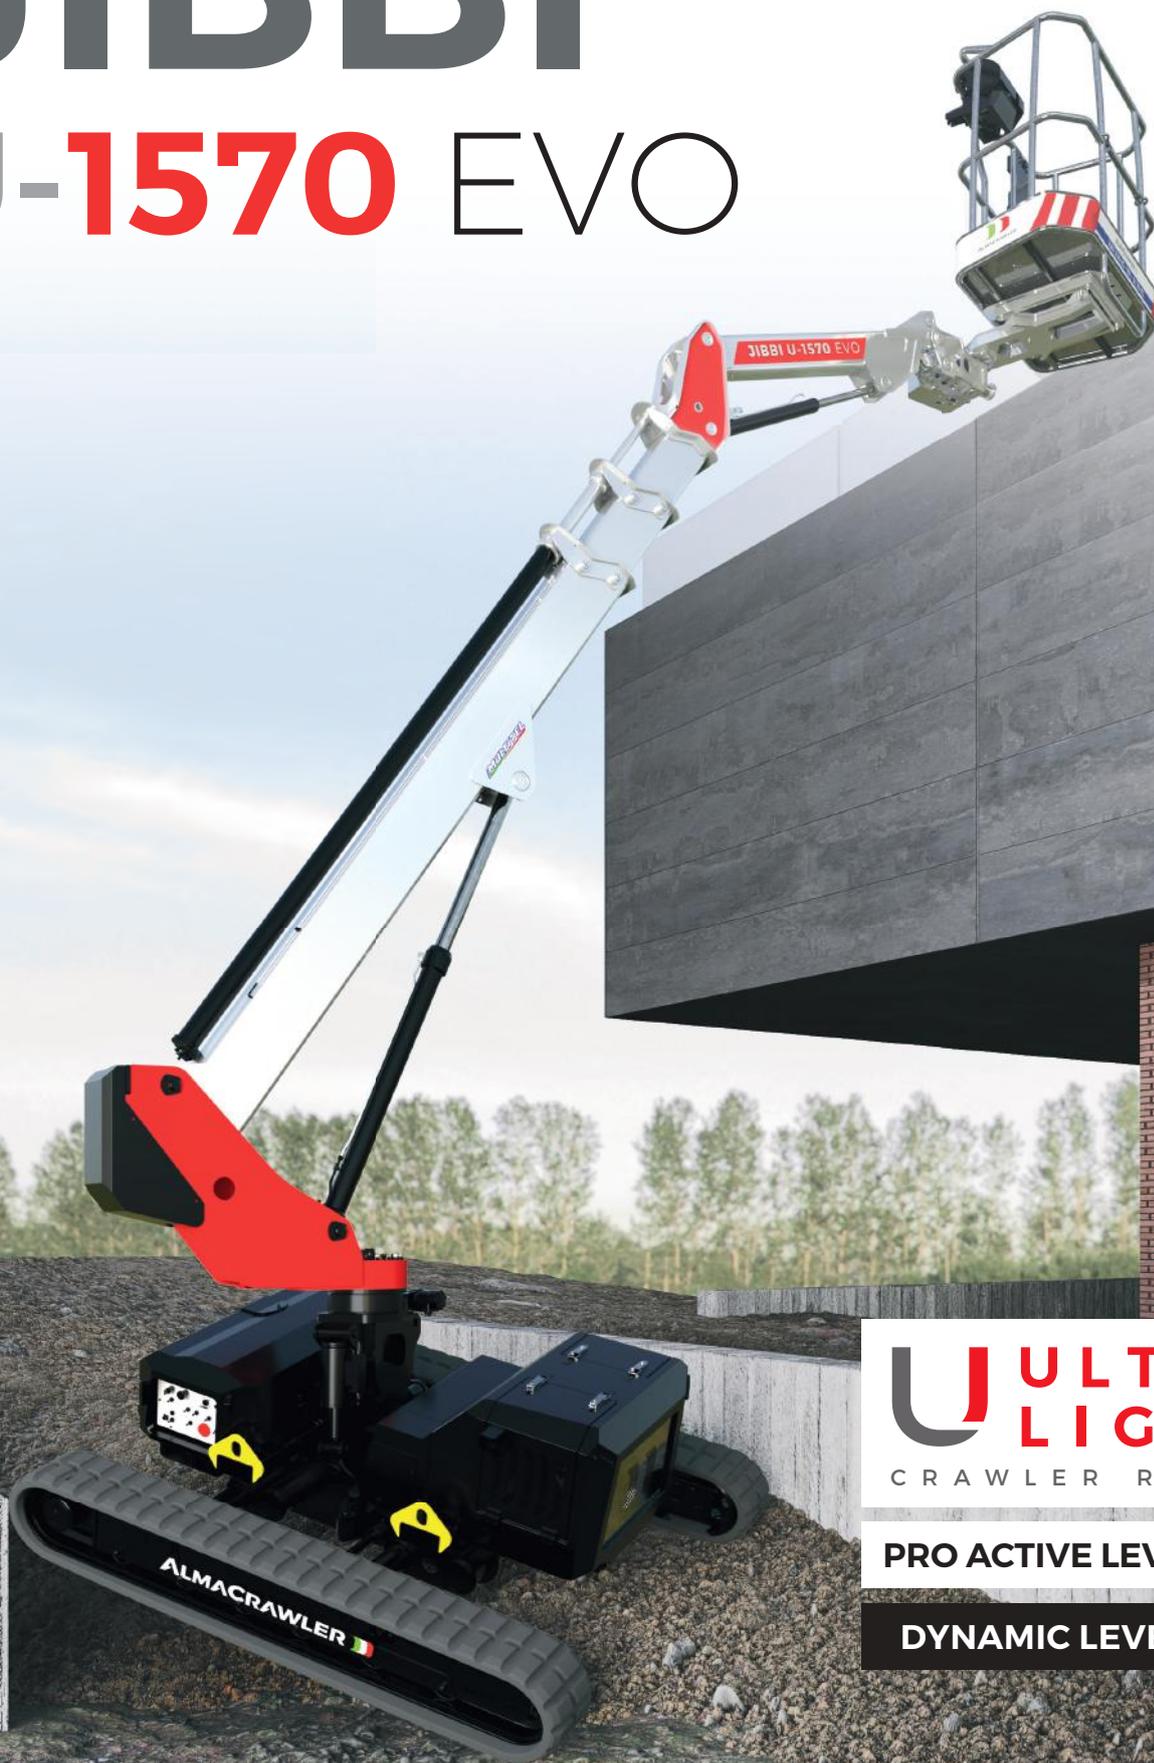

U **ULTRA**
LIGHT
CRAWLER RANGE

PRO ACTIVE LEVELLING

DYNAMIC LEVELLING

CRAWLER TELESCOPIC BOOM

ALMACRAWLER 

T.+41(0) 27 455 79 40

Gemmistrasse

CH-3970 Salgesch

rent@florey.ch

www.florey.ch

JIBBI U-1570 EVO

ALMACRAWLER 

Self-propelled crawler with an Ultralight Telescopic boom of 2,8 tonnes and 15,4 metres high.



Technical data

Max working height	15,40 m
Max height basket floor	13,40 m
Max moving height	9,50 m
Max outreach (load 80 kg)	8,40 m
Max outreach (load 140 kg)	7,40 m
Max outreach (load 230 kg)	6,10 m
Max outreach (load 250 kg)	5,80 m
Rotation angle	+/- 110°
Basket size	1,4 x 0,7 m
Basket rotation angle	+/- 90°
Max basket capacity	250 kg (2 p.)
Length in stowed position	5,08 m
Min width in stowed position	1,35 m
Med working width	1,90 m
Max working width	2,45 m
Min height in stowed position	1,99 m
Longitudinal leveling	+/- 15°
Lateral leveling	+/- 15°
Max gradeability	25°
Max side gradeability	25°
Drive speed (fast)	2,5 km/h
Security speed	0,4 km/h

Weights

Traffic load (max working width)	3,86 kN/m ²
Total weight	~ 2880 kg

Power

3TNM68 -AS Yanmar engine (diesel)	14 kW - 19,2 Hp @3600rpm
-----------------------------------	--------------------------

Extras - On Demand

- Non-marking tracks
- Electric pump 220V-2,2KW / 50Hz (Weight +30 Kg)
- Radio remote control with rechargeable battery
- Arctic lubricant for cold climate
- Ultrasonic Anti-collision System

MyAlmac

CONTROL PANEL



Remote control panel for machine settings

Ultrasonic anti-collision system




Max basket capacity 250 kg

Ultralight aluminium telescopic boom

Integrated Drive System


Using single joystick

Cable remote console by AUTECH

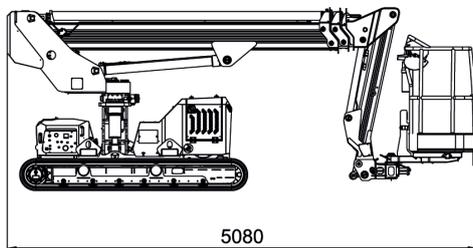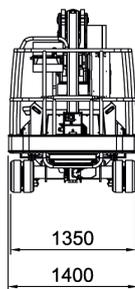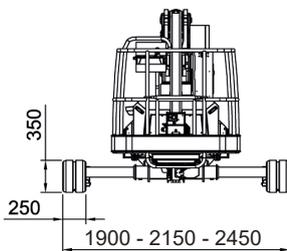

Mix leveling up to 22°

U **ULTRA**
L **LIGHT**
CRAWLER RANGE



Resulting from the partnership between **AlmaCrawler** and **Multitel Pagliero**, the **Ultralight Series** represent the perfect combination of innovation and tradition, offering a mix of unique characteristics all in a single product.

The **Ultralight Boom** produced by Multitel Pagliero with a special aluminum alloy allows for a sturdy yet light structure. This technology combined with the innovative AlmaCrawler **Bi-Levelling Undercarriage**, has produced a self-propelled tracked vehicle with a working height of over 15 meters and a total weight of less than 2.900 Kg, able to travel at height on uneven ground and/or steep slopes (up to 22°) thanks to the Dynamic and Pro-Active Leveling technology.

JIBBI U-1570 EVO

15.4m

250kg

19.2Hp

+/-15°

2.5km/h

+/-15°

MAX W.H.

CAPACITY

POWER

LONG. LEVEL

SPEED

LATER. LEVEL

Dynamic working performance

Progressive outreach control in function of effective working conditions (basket capacity, track width, ground inclination).

- 80 kg
- 140 kg
- 230 kg
- 250 kg

