

ULTRA HIGH DEFINITION CO-AXIAL TERMINATION PANELS



- 75 ohm BNC Bulkhead Connectors
- Performance up to 24GHz (Suitable for 8K)
- Gold Plated Centre Contacts
- Individual Connectors Fully Isolated
- 1RU or 2RU Extruded Aluminium Front Panel
- Lacing Bar On Rear At Depth of 140mm




FEATURES - Using suitably rated BNC connectors these panels can be used up to 24GHz. The BNC connectors are isolated from the front panel and can have a density of up to 24 channels on a single row. With a redesigned aluminium extrusion, the designation strip is now clipped on to allow greater visibility and space for text.

CUSTOM PANEL OPTIONS

- 50 ohm BNC's
- Fibre Connectors
- Non standard layouts with up to 128 BNC's in a 4RU panel and silk-screening in place of designation strips.

To obtain a quote:
Call: +44 (0)1724 273224
Email: sales@dem-uk.com

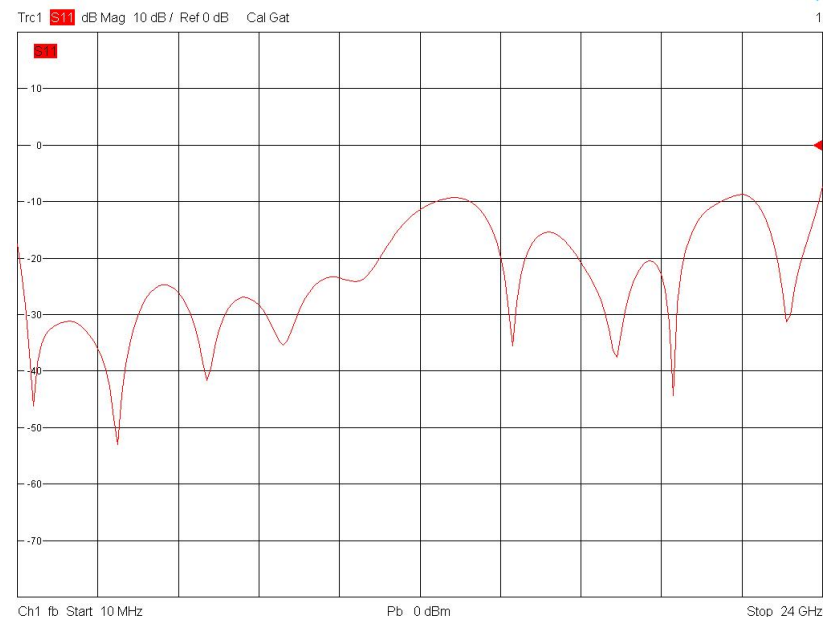

| Product Code | Description |
|--------------|---|
| CTP111675R** | 8K Co-axial Termination Panel 1U 1 x 16 |
| CTP112075R** | 8K Co-axial Termination Panel 1U 1 x 20 |
| CTP112475R** | 8K Co-axial Termination Panel 1U 1 x 24 |
| CTP221675R** | 8K Co-axial Termination Panel 2U 2 x 16 |
| CTP222075R** | 8K Co-axial Termination Panel 2U 2 x 20 |
| CTP222475R** | 8K Co-axial Termination Panel 2U 2 x 24 |
| CTP331675R** | 8K Co-axial Termination Panel 3U 3 x 16 |

**Colour Options: SG (Storm Grey), DG (Dawn Grey) and BK (Black)