

EMI/EMC FILTER

RES1 SERIES



FEATURES

- Suitable for the products that must conform to FCC, FTZ.
- Remarkable attenuation for high voltage impulse.
- Good shield effect by using metal case.
- Excellent filtering characteristics for both differential mode and common mode.
- Epoxy molded for reliability.
- Bidirectional structure effective for both noise from externally and internally generated.

APPLICATIONS

- Digital equipments.
- Mini computers and peripherals.
- Measuring instruments, medical instruments.
- For equipment requiring very high impulse attenuation.
- Suitable for FA equipments.
- Industrial equipments like UPS, inverters, Converters.
- Communication equipments.
- OA equipments like copy machine, FAX, etc..

SPECIFICATIONS

Model	Rated Voltage (AC,DC)	Rated Current	Temperature Rise	Operating Temperature
RES1-F05, T05	250V	5A	45°C max.	-25°C to + 85°C Including temperature rise ※ Fig.1
RES1-F08, T08	250V	8A	45°C max.	
RES1-F10, T10	250V	10A	45°C max.	
RES1-F15, T15	250V	15A	45°C max.	
RES1-F20-B, T20	250V	20A	45°C max.	
RES1-T30	250V	30A	40°C max.	


- Many variations in X and Y capacitor value are available with approvals. For the details, consult with local agent.

Note : Test Voltage : 1500V AC one minute, line to earth.
Insulation Resistance : 300 Mohm min. at 500V DC.
Leakage Current : 0.5mA max.
Voltage Drop : 1V max. at rated current.
Discharge Time : 0.4sec max.
Weight : 250g for ES1-Series except 720g for ES1-T30.

Model Number Construction

RES1	T	05	B
Series Description	Input/Output Terminal style F : Faston Tab #250 T : M4 Stud M5 Stud(ES1-T30 Only)	Current Rating: AC rms 05: 5 amp, 08: 8 amp 10: 10 amp, 15: 15 amp 20: 20 amp, 30: 30 amp	Input/Output Terminal style B : Faston Tab #250 (ES1-F20 Only)

Derating Curve

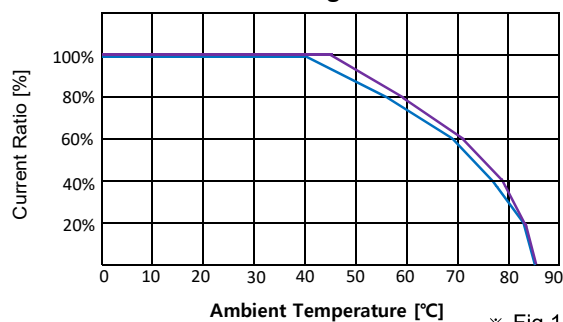


※ Fig.1

— RES1-(T/F)05, RES1-(T/F)08, RES1-(T/F)10,
RES1-(T/F)15, RES1-(T/F)20, RES1-T20B
— RES1-(T/F)30, RES1-T30A


Shapes and Dimensions

RES1-F **

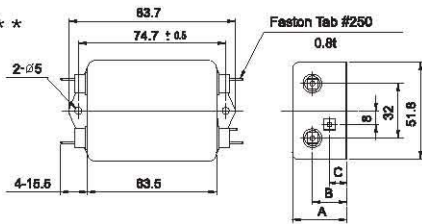


MODEL	A	B	C
ES1-∅10, 15, 20	38	24	11
ES1-∅05, 08	32	20	8

RES1-T **

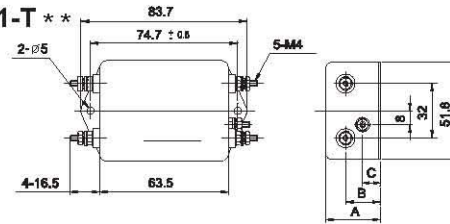


RES1-T30

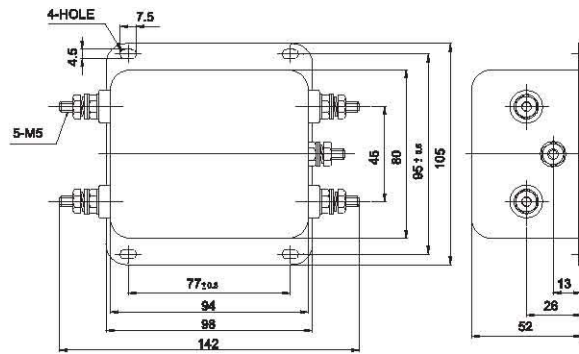


* General tolerance : ±1.0
* Unit : mm
* Metal Case

RES1-F20-B

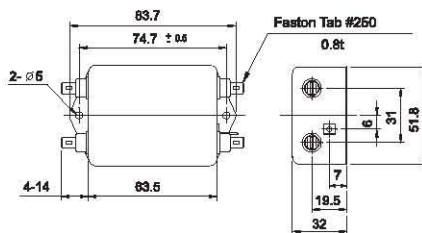


Attenuation Characteristics


Common Mode (RES1-(∅05,∅08,∅20,T30)types)

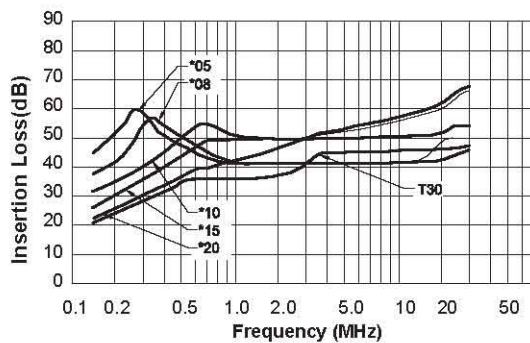


Differential Mode (RES1-(∅05,∅08,∅20,T30)types)

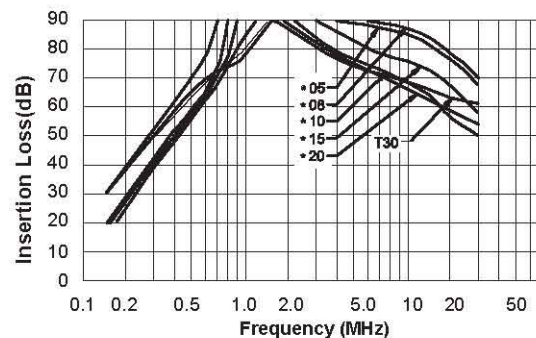

Impulse Characteristics

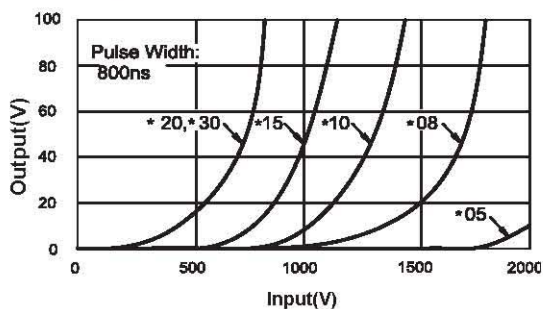

Circuit Diagram

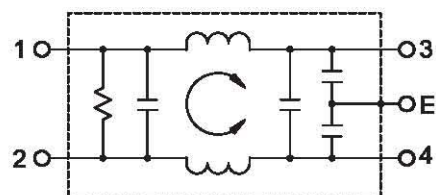

Measurement configuration

