

RES80 Chassis Mounted Filter


Multi-Stage, High Differential and High Common Mode

The RES80 series of multi-stage EMC filters from Roxburgh are designed for quick and easy chassis mounting. Featuring high differential mode and high common mode attenuation, this series has good low frequency attenuation.

These general purpose filters are suitable for a broad range of applications including noisy environments where increased filter performance is required.



Temperature Derating Curve for EMC Filters
Rated at 40°C Ambient and 100°C Maximum

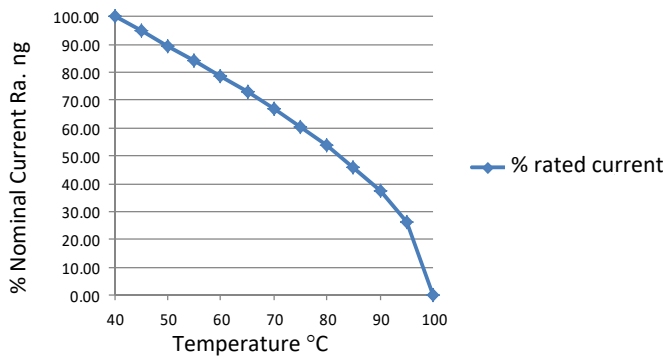

Call us on:

+44 (0) 1724 273200

Features:

- Multi-stage
- High differential and high common mode attenuation
- Good low frequency attenuation
- UL approved E191581
- For use from DC to 400Hz
- 1 Amp to 16 Amp

Benefits:

- Compact size for rated current
- Fast-on, screw or wire terminations
- Quick and Easy Mounting
- Available from UK Stock

Application Examples:

- Lighting
- Drives
- Electrical and electronic equipment
- Consumer goods
- Household equipment
- Building automation
- Machinery
- Electronic data/communication processing equipment
- Office automation

Full technical specification on page 2

Performance curves on page 3

Other options in this range on page 4

DEM Manufacturing

Deltron Emcon House
Hargreaves Way
Sawcliffe Industrial Park
Scunthorpe, North Lincolnshire.
DN15 8RF




ROXBURGH EMC



Tel: +44 (0) 1724 273200


Email: sales@dem-uk.com

Web: www.dem-uk.com/roxburgh

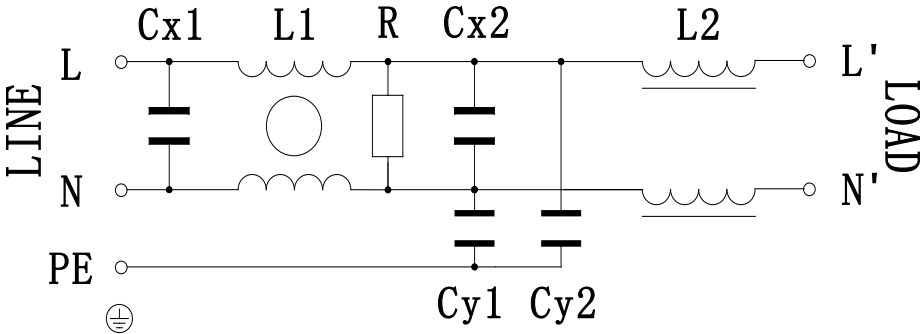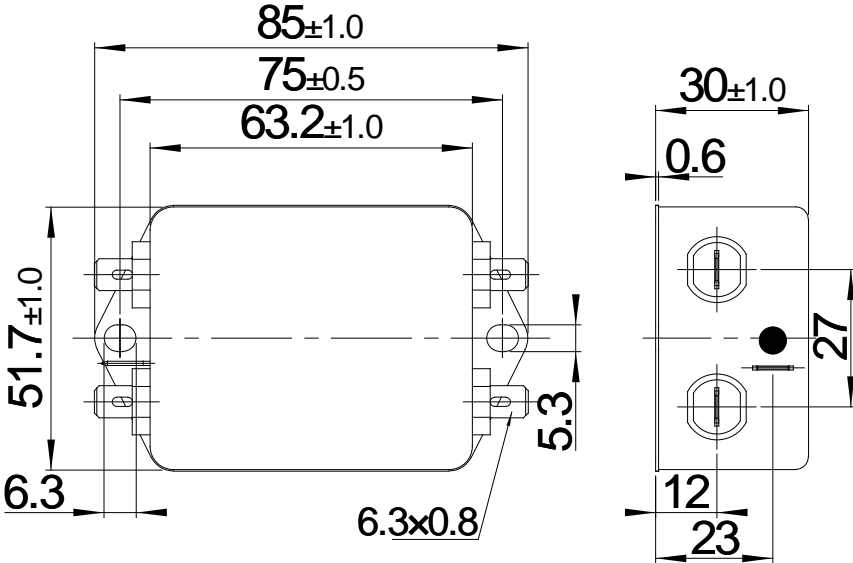
Circuit diagram:		Dimensions(mm):						
								
Electrical parameters:		Filter parameters:						
Rated Voltage:	120/250VAC	Total Inductance(L-L'/N-N'):		22.5mH +50%,-35%				
Rated Current at an ambient temp:	1A@40°C	Total Capacitance(L-N/L'-N'):		0.66uF +/-20%				
Operating Frequency:	50/60Hz	Total Capacitance(L/N-PE) (RES80F01-M):		9.4nF +/-20% (0nF)				
Climatic Class(IEC60068-1):	25/100/21	Total Resistance(L-N/L'-N'):		1MΩ +/-10%				
Operational Leakage current: (at 250VAC/50Hz and Total C +/-20%)	0.8mA max (RES80F01-M 0mA)	Weight(Approximate):		170g				
Operational Leakage current: (at 120VAC/60Hz and Total C +/-20%)	0.46mA max (RES80F01-M 0mA)	Safety certification			Technical Specification			
Test Voltage(100%)for 2 sec: L-N: L/N-PE:		UL	<input checked="" type="checkbox"/>	CSA	<input checked="" type="checkbox"/>	compiled by	Jay Zhang	2020-8-5
	1100VDC/20mA	ENEC	<input checked="" type="checkbox"/>	CQC	<input type="checkbox"/>	reviewed by	Pallas Wang	2020-8-5
	2250VDC/20mA	CE	<input checked="" type="checkbox"/>	VDE	<input type="checkbox"/>	approved by	Henry Huang	2020-8-5
 <div> +44 (0)1724 273200 sales@dem-uk.com www.dem-uk.com/roxburgh </div>		Part RES80F01				single-phase emc filter		
		Number (Alternate RES80F01-M - no Y caps)				stage marker	V1.03	

ROXBURGH EMC
FILTER INSERTION LOSS CHARACTERISTICS
CISPR 17 - 50 OHM METHOD

RES80F01

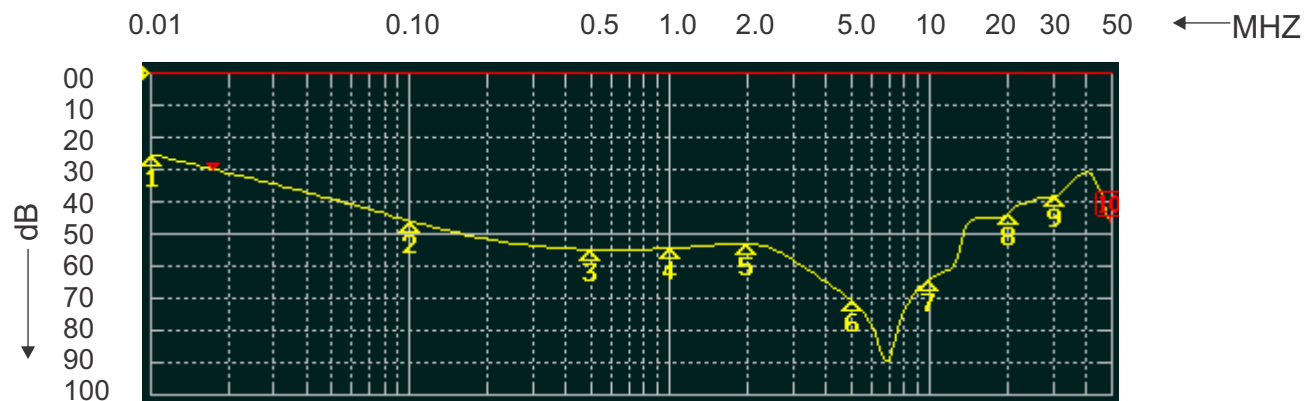

COMMON MODE

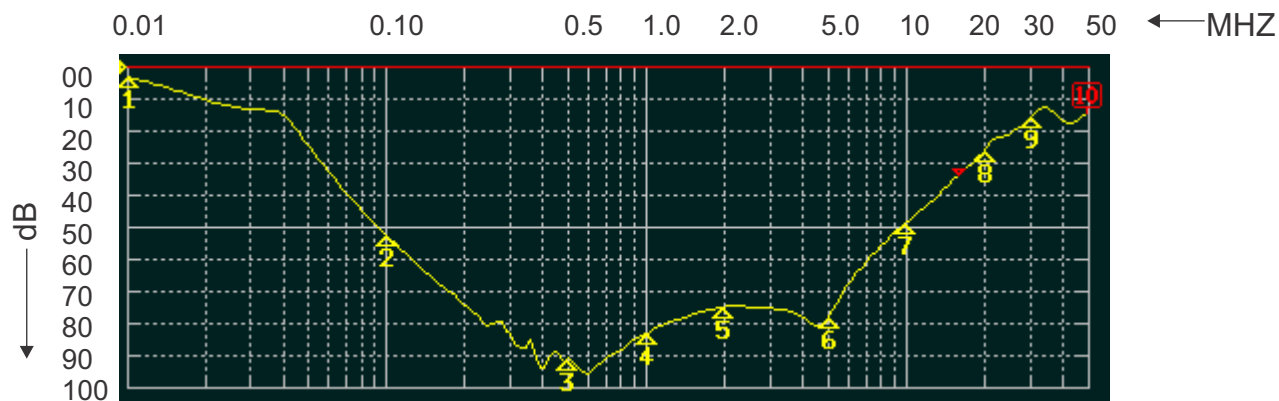




DIFFERENTIAL MODE



RES80 Chassis Mounted Filter

Multi-Stage, High Differential and High Common Mode

Options Available:

Part Number	Rated Current @40°C A	Leakage Current @ 230V/50Hz mA	Inductance ΣL mH	Capacitance ΣCx uF	Capacitance ΣCy nF	Resistance ΣR K Ω	Connection Type		
									
RES80F01	1	0.73	22.4	0.66	9.4	1000	F	W	
RES80F03	3	0.73	9.96	0.94	9.4	470	F	W	
RES80F06	6	0.73	7.91	2	9.4	220	F	W	
RES80F10	10	0.73	4.56	2	9.4	220	F	W	
RES80F12	12	0.73	3.30	2	9.4	220	F	W	
RES80F16	16	0.73	2.84	2	9.4	220	F	W	S

Call us on:

+44 (0) 1724 273200



DEM Manufacturing

Deltron Emcon House, Hargreaves Way, Sawcliffe Industrial Park,
Scunthorpe, North Lincolnshire, DN15 8RF

Tel: +44 (0) 1724 273200

Email: sales@dem-uk.com

Web: www.dem-uk.com/roxburgh